
Photoelectrics
Through-beam
Type PD30CNT15....MU/DU

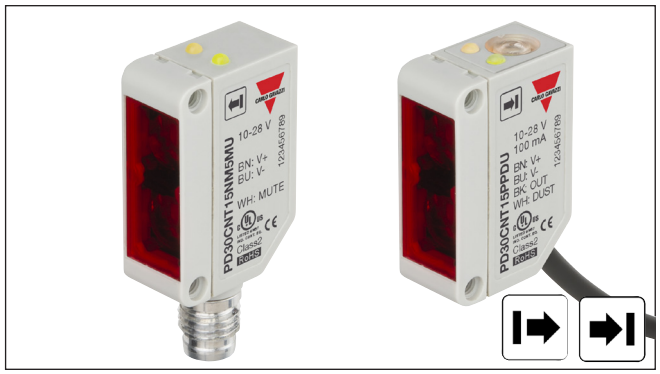

- Miniature sensor range
- Range: 15 m
- Sensitivity adjustment by Teach-In programming
- Modulated, Infraredred light 880 nm
- Supply voltage: 10 to 30 VDC
- Output: 100 mA, NPN or PNP preset
- Make and break switching function programmable
- LED indication for output, stability and power ON
- Protection: reverse polarity, short circuit and transients
- Cable and plug versions
- Excellent EMC performance
- Mute function (Sensor blanking) Emitter
- Dust alarm output - Receiver

Product Description

The PD30CNT15 sensor family comes in a compact 10 x 30 x 20 mm reinforced PMMA/ABS housing.
The sensors are useful in applications where high-accuracy detection as well as small size is required.
Compact housing and high power LED for excellent performance-size ratio.
The Teach-In function for adjustment of the sensitivity makes the sensors highly flexible. The output type is preset (NPN or PNP), and the output switching function is programmable (NO or NC), and one dust output NO or NC.
The mute function can be used for testing the sensor for: Malfunctioning, disconnection, optical axis adjustment, dusty and dirty lenses.

Ordering Key

PD30CNT15NPM5DU

- **Type**
- **Housing style**
- **Housing size**
- **Housing material**
- **Housing length**
- **Detection principle**
- **Sensing distance**
- **Output type**
- **Output configuration**
- **Connection type**
- **Dust**

Type Selection

Housing W x H x D	Range S_n	Connection	Ordering no. NPN Emitter	Ordering no. NPN Make or break switching	Ordering no. PNP Emitter	Ordering no. PNP Make or break switching
10 x 30 x 20 mm	15 m	Cable	**PD 30 CNT 15 NMU**	**PD 30 CNT 15 NPDU**	**PD 30 CNT 15 PMU**	**PD 30 CNT 15 PPDU**
10 x 30 x 20 mm	15 m	Plug	**PD 30 CNT 15 NM5MU**	**PD 30 CNT 15 NPM5DU**	**PD 30 CNT 15 PM5MU**	**PD 30 CNT 15 PPM5DU**

Note: Emitter, Receiver and Connector to be ordered separately.

Specifications Emitter EN 60947-5-2

Rated operational volt. (U_B)	10 to 30 VDC
Ripple (U_{rpp})	≤ 10%
Supply current	≤ 25 mA
Light Source	GaAlAs, LED, 880 nm
Optical angle	± 2° at ½ range
Light type	Infrared, modulated
Light spot	110 mm @ 1.5 m

Protection		Reverse polarity, transients
Indication function		
Power supply ON		LED, green
Mute function		
Emitter off	0 to 3 sec	0 to 2.5 VDC (NPN) 5 to 30 VDC (PNP)
Emitter half power	> 3 sec	0 to 2.5 VDC (NPN) 5 to 30 VDC (PNP)

ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru
Sensoren

CARLO GAVAZZI

Specifications Receiver EN 60947-5-2

Rated operating distance (S_n)	15 m, with PD30CNT15 Emitter
Blind zone	None
Sensitivity	Adjustable by Teach-In
Temperature drift	≤ 0.3%/°C
Hysteresis (H) (differential travel)	≤ 10%
Rated operational volt. (U_B)	10 to 30 VDC
Ripple (U_{rpp})	≤ 10%
Adjustable range resolution	1.5 m to 15 m 3% on distance
Output current	
Continuous (I_e)	≤ 100 mA
Short-time (I)	≤ 100 mA (max. load capacity 100 nF)
Dust output current	
Continuous (I_e)	≤ 20 mA
Short-time (I)	≤ 20 mA (max. load capacity 100 nF)
No load supply current (I_o)	≤ 30 mA
Minimum operational current (I_m)	0.5 mA

OFF-state current (I_r)	≤ 100 µA
Voltage drop (U_d)	≤ 2.5 VDC @ 100 mA
Protection	Short-circuit, reverse polarity and transients
Sensing angle	± 4°
Ambient light	10,000 lux
Operating frequency	1000 Hz
Response time	
OFF-ON (t_{ON})	≤ 0.5 ms
ON-OFF (t_{OFF})	≤ 0.5 ms
Power ON delay (t_v)	≤ 300 ms
Output function	
NPN and PNP	Preset
NO/NC switching function	Set up by button
Programming options	
Output pin 4 black	NO or NC
Output pin 2 white	NO or NC (dust)
Dust alarm output	
Delay on operate	20 ms
Indication	
Output ON	LED, yellow
Signal stability ON and power ON	LED, green


General Specifications EN 60947-5-2

Environment	
Installation category	III (IEC 60664/60664A; 60947-1)
Pollution degree	3 (IEC 60664/60664A; 60947-1)
Degree of protection	IP 67 (IEC 60529; 60947-1)
Ambient temperature	
Operating	-25° to +55°C (-13° to +131°F)
Storage	-40° to +70°C (-40° to +158°F)
Vibration	10 to 55 Hz, 0.5 mm/7.5 g (IEC 60068-2-6)
Shock	30 g / 11ms, 3 pos, 3 neg per axis (IEC 60068-2-6, 60068-2-32)
Rated insulation voltage	500 VAC (rms)

Housing material	
Body	ABS
Front material	PMMA, red
Connection	
Cable	PVC, black, 2 m, Ø = 3.3 mm 4 x 0.14 mm^2
Plug	M8, 4-pin (CON.54NF.. series)
Weight (each sensor)	With cable: 40 g With plug: 10 g
CE-marking	Yes
Approvals	cULus (UL508)

Operation Diagram

tv = Power ON delay

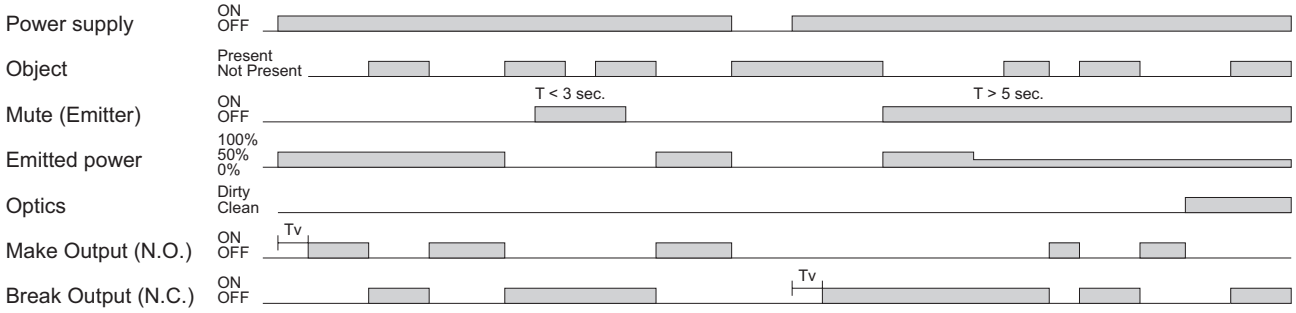


ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru

Sensoren


CARLO GAVAZZI

Wiring Diagrams


Receiver

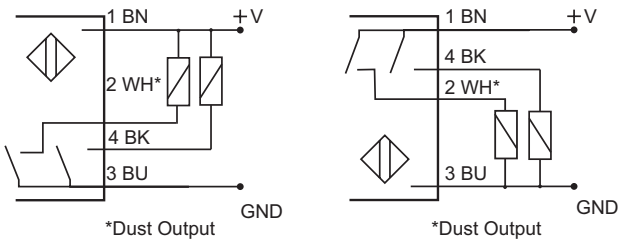


Emitter

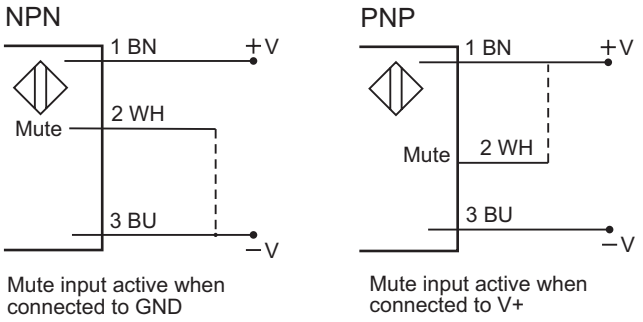


Detection Diagram

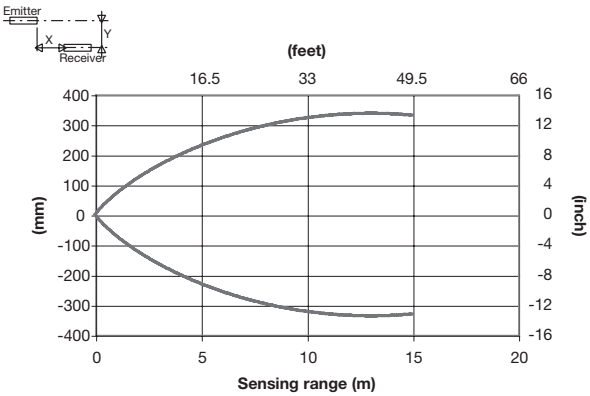


Excess Gain

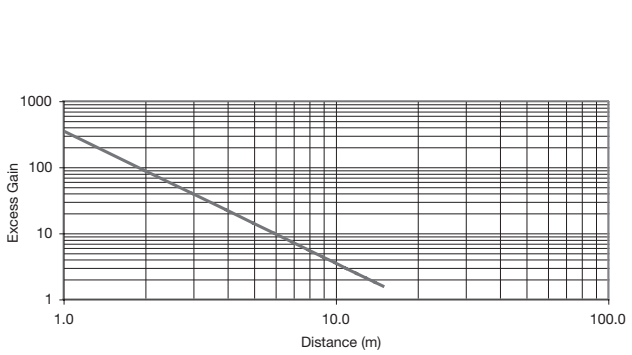

Signal Stability Indication

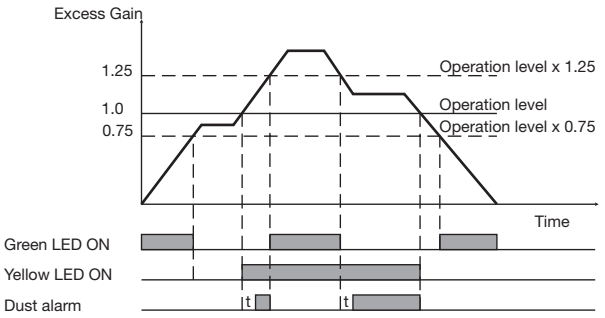


Accessories

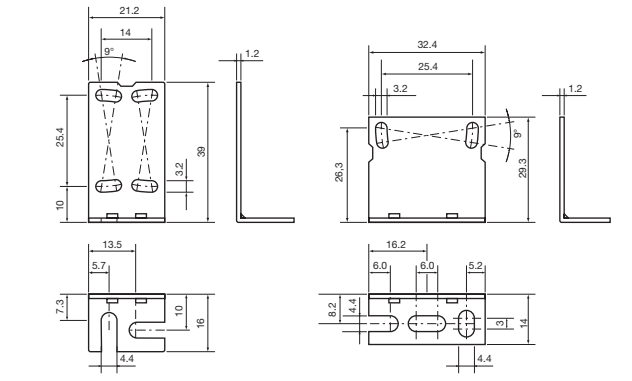


ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru
Sensoren

Dimensions

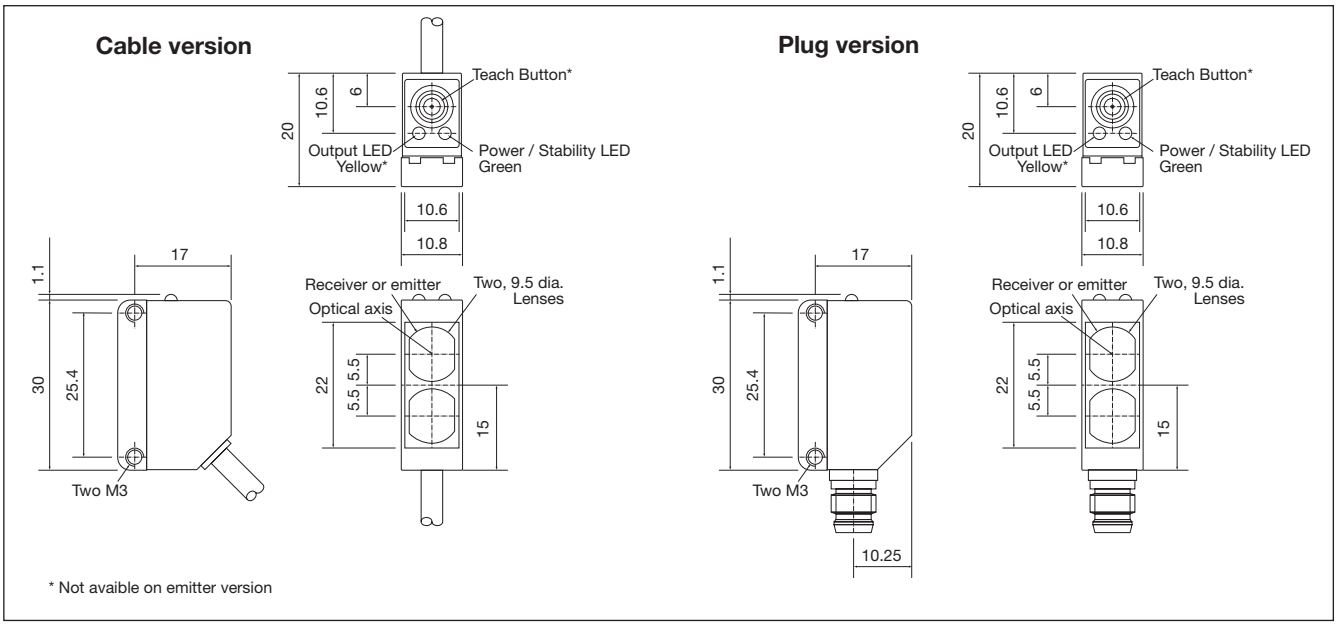

Installation Hints

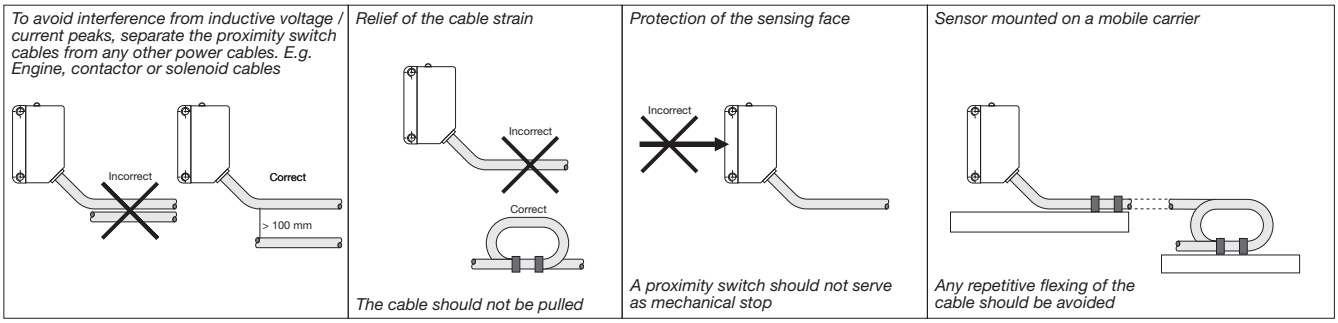

Delivery Contents

- Photoelectric switch: PD 30 CNT 15 ...
- Installation instruction
- Mountingbracket APD30-1
- **Packaging:** Cardboard box

Accessories

- Mounting bracket APD30-2 to be purchased separately
- Connector type CON.54NF.. series to be purchased separately


ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru
Sensoren

CARLO GAVAZZI

Teach functions


Normal operation, optimized switching point

1. Line up the emitter and receiver. Yellow LED and Green LED are ON.
2. Press the button for 3 seconds until both LEDs flashes simultaneously.
   (The first switch point is stored)
3. Place the object between the emitter and receiver in the detection zone.
4. Press the button once and the sensor is ready to operate (Green LED ON, Yellow LED ON)
   (The second switch point is stored)

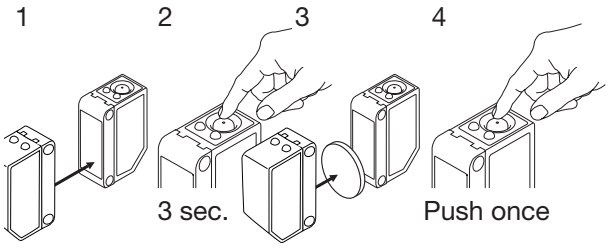


For maximum sensing distance (default setting)

1. Line up the emitter and receiver, place the object between the emitter and receiver in the detection zone. Yellow LED is OFF and Green LED is ON.
2. Press the button for 3 seconds until both LEDs flashes simultaneously.
   (The first switch point is stored)
3. Press the button a second time and the sensor is ready to operate (Green LED ON, Yellow LED ON)
   (The second switch point is stored)

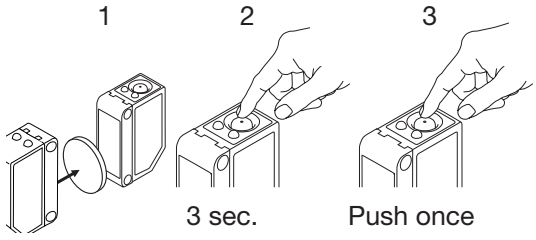


For minimum sensing distance (Transparent or semi-transparent objects)

1. Line up the emitter and receiver. Yellow LED and Green LED are ON.
2. Press the button for 3 seconds until both LEDs flashes simultaneously.
   (The first switch point is stored)
3. Press the button a second time and the sensor is ready to operate (Green LED ON, Yellow LED ON)
   (The second switch point is stored)

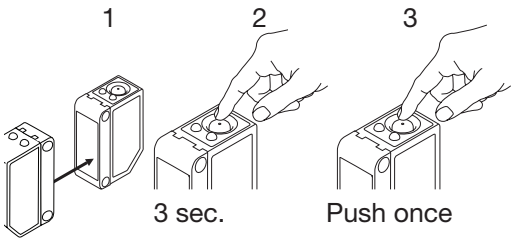


For dynamic set-up (running process)

1. Line up the emitter and receiver. Green LED is ON, status on the yellow LED is not important.
2. Press the button for 3 second until both LEDs flashes simultaneously.
   (The first switch point is stored)
3. Press the button a second time and keep the button pressed for at least one process cycle, release the button and the sensor is ready to operate (The second switch point is stored)

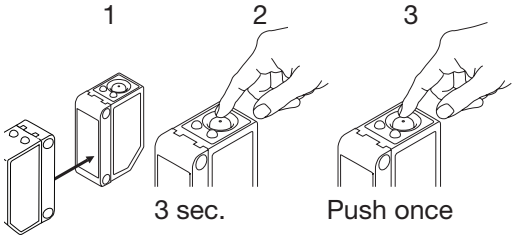


For make or break set-up

1. Press the button for 10 seconds, until the green LEDs flashes.
2. While the green LED flashes, the output is inverted each time the button is pressed. Yellow LED indicates N.O. function selected.
   If the button is not pressed within the next 10 seconds, the current output is stored.

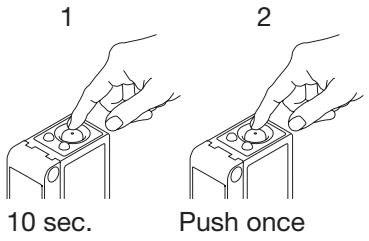

For dust output (N.O. or N.C.)

1. Press the button for 15 seconds, until the yellow LEDs flashes.
2. While the yellow LED flashes, the dust output is inverted each time the button is pressed. Green LED indicates N.O. function selected.
   If the button is not pressed within the next 10 seconds, the current output is stored.

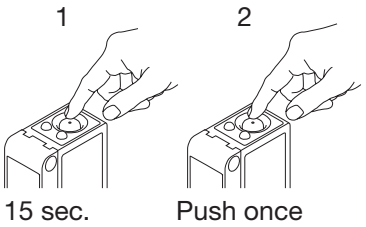

ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru
Sensoren