

FS-V10

Fiber Amplifier, Zero-line Expansion Unit

*Please note that accessories depicted in the image are for illustrative purposes only and may not be included with the product.

This model has been discontinued.
Compliance with the certification standard is ensured as of the time of shipment from our company.

Contact Us: 1-888-539-3623

Recommended Replaceable Products: Digital Fiber Optic Sensor - FS-N40 series

Specifications


Model		FS-V10
Type		0-line expansion unit
Output		NPN
Light source		Red LED
Response time		410 µs to 1.7 ms*1
Operation mode		LIGHT-ON/DARK-ON (switch-selectable)
Indicator lamp		Display indicator: Red LED Digital LED monitor: Seven segments, four digits, red LED Bar LED monitor: One orange LED and six green LEDs
Timer function		ON-delay: 40 ms /OFF-delay: 10 ms /Timer OFF (switch-selectable)
Control output		—
Protection circuit		Reversed polarity protection, over-current protection, surge absorber
Unit expansion		Up to 16 expansion units can be connected (a total of 17 units).*2
Mutual interference suppression		FINE : 4, TURBO/SUPER: 8
Rating	Power voltage	12 to 24 VDC ±10 %, Ripple (P-P) 10 % or less*3
	Current consumption	50 mA or less
Environmental resistance	Ambient light	Incandescent lamp: 10,000 lux max., Sunlight: 20,000 lux max.
	Ambient temperature	-10 to +55 °C 14 to 131 °F (No freezing)
	Relative humidity	35 to 85 % RH (No condensation)
	Vibration resistance	10 to 55 Hz, Double amplitude 1.5 mm 0.06", 2 hours in each of the X, Y, and Z directions
	Shock resistance	500 m/s², 3 times in each of the X, Y, and Z directions
Case material		Polycarbonate
Weight		Approx. 20 g

*1 The response speed varies depending on the number of expansion units connected.
*2 If more than one unit is used together, the ambient temperature varies with the conditions below. Mount the units on the DIN rail with mounting brackets and check that the output current is 20 mA or less.
3 to 10 Units: -10 to 50°C 14 to 122°F, 11 to 16 Units: -10 to 45°C 14 to 113°F
*3 Neither the FS-V12 nor the FS-V10 can be used as a standalone unit.


Dimensions

* Download CAD file or product manual for larger image/text and more detail.


fs_v10_dimension_011229653121090.gif

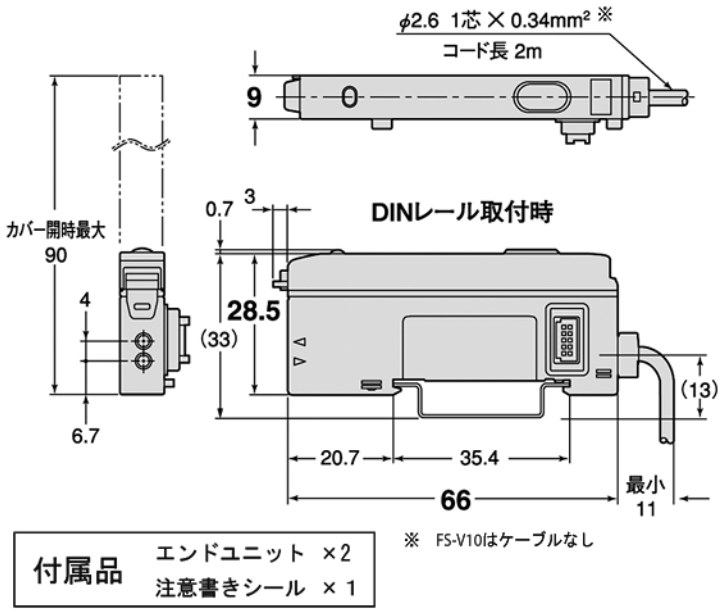

fs_v10_dimension_021234769517930.gif

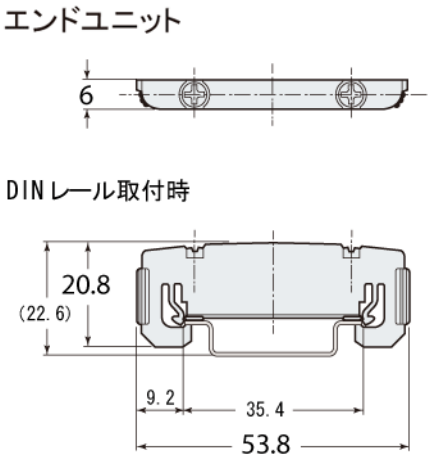

fs_v10_dimension_031234769508351.gif

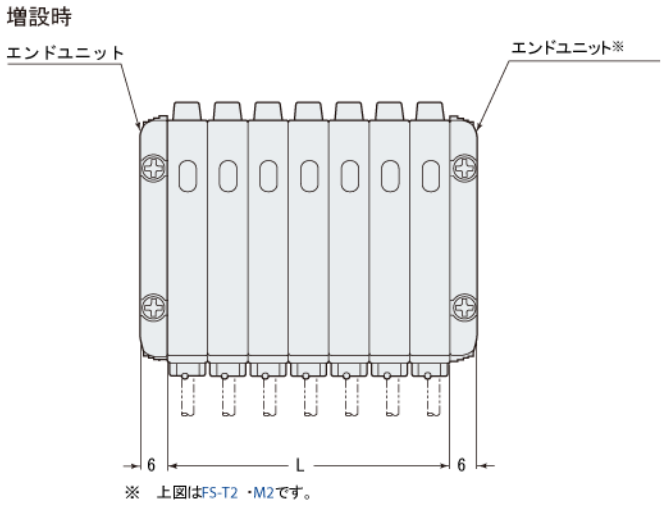

子機増設数	L
1	18
2	27
3	36
4	45
5	54
6	63
7	72
8	81
9	90
10	99
11	108
12	117
13	126
14	135
15	144
16	153