

EH-910

Sensor Head, Shielded Type, f10, Fluoroplastic

CE

*Please note that accessories depicted in the image are for illustrative purposes only and may not be included with the product.


Specifications

Model		EH-910
Type		Solvent resistant , Shielded , Cylindrical
Detectable object		Ferrous metals (see Characteristics for nonferrous metals)
Standard target (iron, t=1 mm 0.04")		10 x 10 mm 0.39" x 0.39"
Stable detecting range		0 to 2 mm0.08"
Maximum detecting distance		4.5 mm0.18"
Hysteresis		0.06 mm0.002"
Repeatability		0.005 mm0.0002"
Temperature characteristics		-10 to +15% max. of detecting distance at 23°C (73.4°F), within 0 to +60°C (32 to 140°F)
Environmental resistance	Enclosure rating	IP67
	Ambient temperature	-10 to +60 °C 14 to 140 °F (No freezing)
	Relative humidity	35 to 85 % RH (No condensation)
Weight		Approx. 53 g (including nuts and 3-m 9.8' cable)


Dimensions

* Download CAD file or product manual for larger image/text and more detail.

EH-910

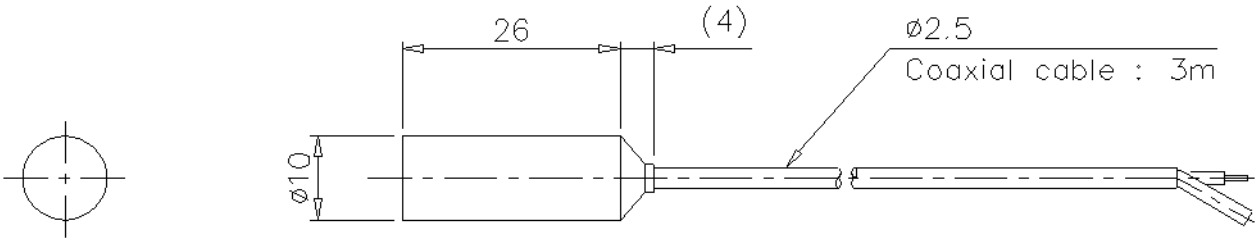


Mounting bracket

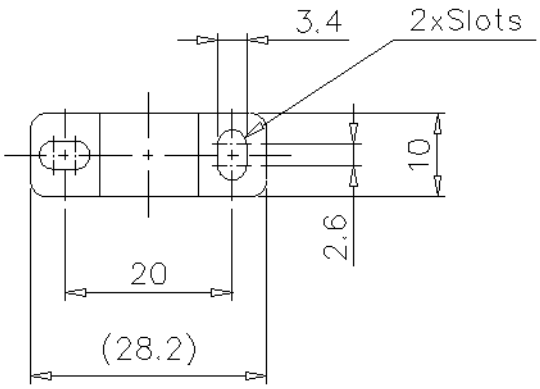

Characteristic

* Download CAD file or product manual for larger image/text and more detail.

Characteristics

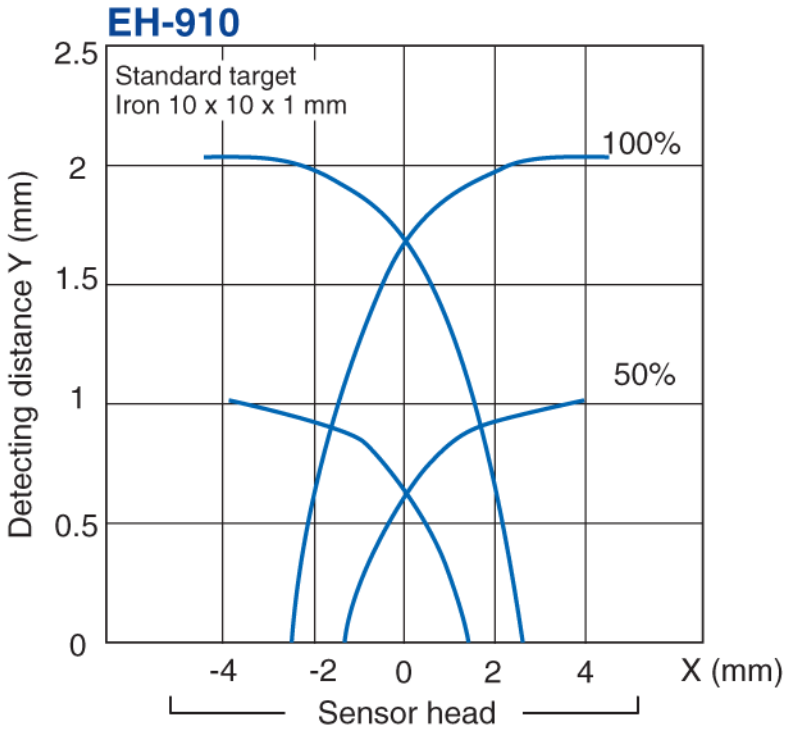

Long-distance Separate-amplifier Proximity Sensors

