
Photoelectrics
Through-beam
Type PH18CNT..., DC

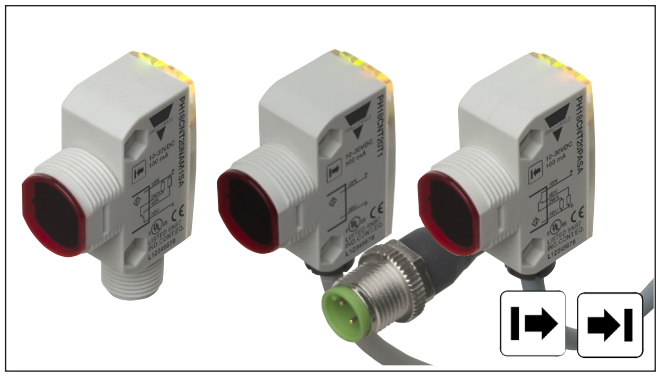

- Miniature sensor range
- Range: 20 m
- Sensitivity adjustment by potentiometer
- Modulated, infrared light 850 nm
- Supply voltage: 10 to 30 VDC
- Output: 100 mA, NPN or PNP, N.O + N.C.
- Degree of protection IP67, IP69K
- LED indication for output, stability and power ON
- Protection: reverse polarity, short circuit and transients
- Cable, plug and pigtail versions
- Excellent EMC performance

Product Description

The PH18CNT... is part of a family of inexpensive general purpose through-beam sensors in industrial standard 18 mm cylindrical and square ABS housing.
The sensors are useful in applications where high-accuracy detection as well as small size is required.
Compact housing and high power LED for excellent performance-size ratio.
The potentiometer used for adjustment of the sensitivity makes the sensors highly flexible. The output type is NPN or PNP and the output switching function is NO and NC.

Ordering Key

PH18CNT20PAM1SA

- **Type**
- **Housing style square**
- **Housing size**
- **Housing material**
- **Housing type neutral**
- **Detection principle**
- **Sensing distance**
- **Output type**
- **Output configuration**
- **Connection type**
- **Sensitive adjustment**

Type Selection

Housing type	Range S_n	Connection	Ordering no. Emitter	Ordering no. Receiver NPN Make or break switching	Ordering no. Receiver PNP Make or break switching
M18 Square type	20 m	Cable	**PH 18 CNT 20**	**PH 18 CNT 20 NASA**	**PH 18 CNT 20 PASA**
M18 Square type	20 m	Plug	**PH 18 CNT 20M1**	**PH 18 CNT 20 NAM1SA**	**PH 18 CNT 20 PAM1SA**
M18 Square type	20 m	Pigtail M12	**PH 18 CNT 20T1**	**PH 18 CNT 20 NAT1SA**	**PH 18 CNT 20 PAT1SA**

Specifications Receiver according to EN60947-5-2

Rated operating distance (S_n)	Up to 20 m
Blind zone	0 mm
Sensitivity control Electrical adjustment Mecanical adjustment Adjustable distance to target	Adjustable by potentiometer 210° 240° 1 - 20 m
Temperature drift	≤ 0.2%/°C
Hysteresis (H) (differential travel)	≤ 20%
Rated operational volt. (U_B)	10 to 30 VDC (ripple included)
Ripple (U_{rpp})	≤ 10%
Output current Continuous (I_e) Short-time (I)	≤ 100 mA ≤ 100 mA (max. load capacity 100 nF)
No load supply current (I_o)	≤ 15 mA @ 24 VDC
Minimum operational current (I_m)	0.5 mA

OFF-state current (I_r)	≤ 100 µA
Voltage drop (U_d)	≤ 2.0 VDC @ 100 mA
Protection	Short-circuit, reverse polarity and transients
Sensing angle	± 4°
Ambient light	30.000 lux Incandescent lamp
Operating frequency	500 Hz
Response time OFF-ON (t_{ON}) ON-OFF (t_{OFF})	 ≤ 1.0 ms ≤ 1.0 ms
Power ON delay (t_v)	≤ 200 ms
Output function Type Switching function	 NPN or PNP NO and NC
Indication Output ON Signal stability and power ON	 LED, yellow LED, green

ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru
Sensoren

CARLO GAVAZZI


Specifications Emitter according to EN60947-5-2

Rated operational volt. (U_B)	10 to 30 VDC (ripple included)
Ripple (U_{rpp})	≤ 10%
Supply current (I_o)	≤ 25 mA @ 24 VDC
Light source	LED, 850 nm
Light type	Infrared, modulated
Sensing angle	± 4°
Light spot Diameter	Ø 1500 mm @ 10 m
Protection	Reverse polarity and transients
Indication function	
Power supply ON	LED, green
Signal stability and power ON	LED, green
Power on delay	< 200 ms

Specifications Common according to EN60947-5-2


Environment	
Installation category	III (IEC 60664/60664A; 60947-1)
Pollution degree	3 (IEC 60664/60664A; 60947-1)
Degree of protection	IP 67, IP 69K*
Ambient temperature	
Operating	-25° to +60°C
Storage	-40° to +70°C
Vibration	10 to 150 Hz, 1.0 mm/15 g (IEC 60068-2-6)
Shock	30 g / 11ms, 3 pos, 3 neg per axis (IEC 60068-2-6, 60068-2-32)
Rated insulation voltage	500 VAC (rms) IEC protection class III
Housing material	
Body	ABS, grey
Backpart	PC-Transparent
Front material	PMMA, red
Cable gland	POM, Black
Trimmer shaft	POM, Dark Grey
Locknuts	PP, black
Mounting bracket	PPA, black
Connection	
Cable	PVC, grey, 2 m
Receiver	4 x 0.25 mm², Ø = 4.5 mm
Emitter	2 x 0.25 mm², Ø = 4.5 mm
Plug	M12, 4-pin (CON.14NF..W series)
Pigtail	PUR, grey, 30 cm 4 x 0.25 mm², Ø = 4.5 mm M12, 4-pin (CON.14NF..W series)
Weight	With cable: 85 g With Pigtail: 40 g With plug: 25 g
CE-marking	Yes
Approvals	cULus (UL508) supply class 2

* The IP69K test according to DIN 40050-9 for high-pressure, high-temperature wash-down applications. The sensor must not only be dust tight (IP6X), but also able to withstand high-pressure and steam cleaning. The sensor is exposed to high pressure water from a spray nozzle that is fed with 80°C water at 8'000–10'000 KPa (80–100bar) and a flow rate of 14–6L/min. The nozzle is held 100 –150 mm from the sensor at angles of 0°, 30°, 60° and 90° for 30s each. The test device sits on a turntable that rotates with a speed of 5 times per minute. The sensor must not suffer any damaging effects from the high pressure water in appearance and function.



Operation Diagram

tv = Power ON delay

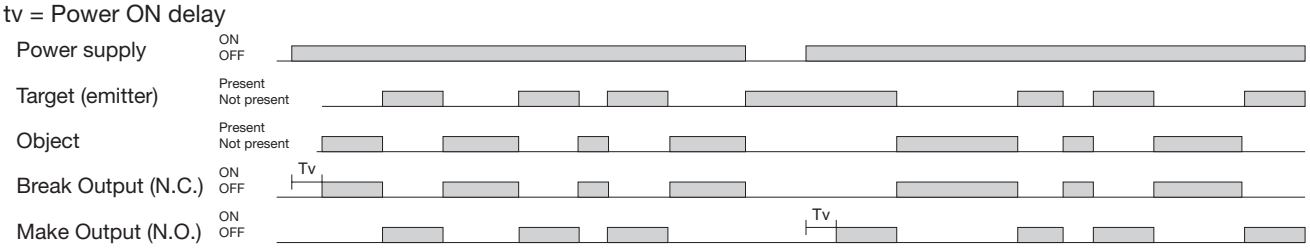

ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru


Sensoren

CARLO GAVAZZI


Wiring Diagrams

Receiver


NPN




PNP




Emitter




Detection Diagram

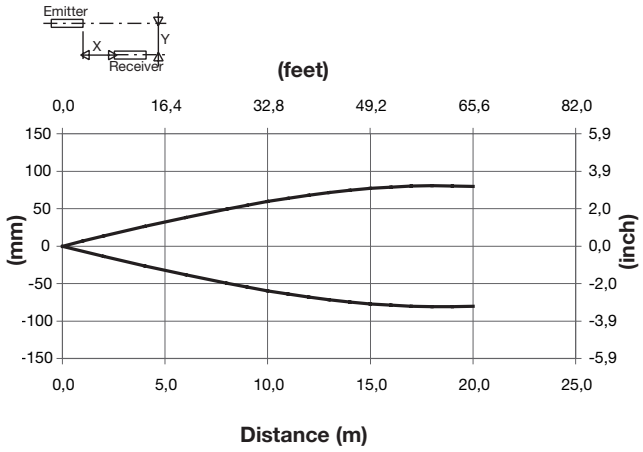


Excess Gain

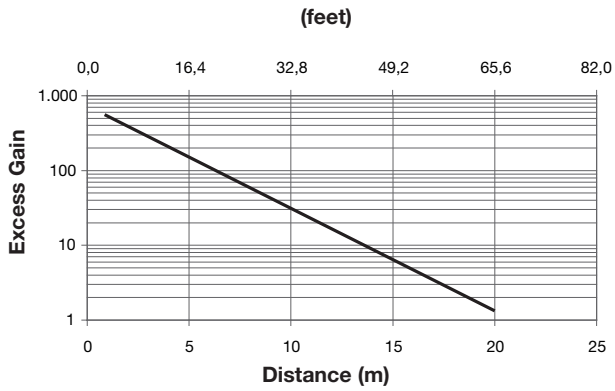

Signal Stability Indication

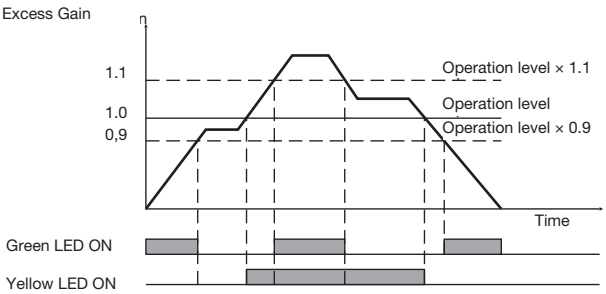



APH18-MB1

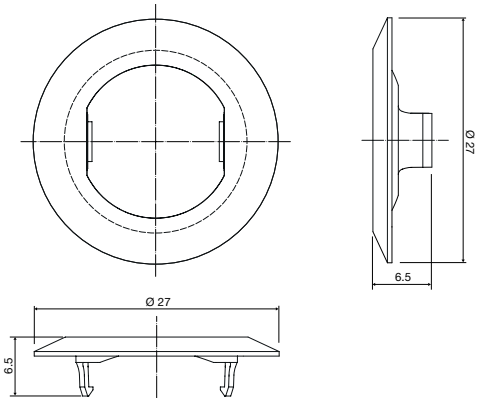

ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru
Sensoren

Mounting Systems

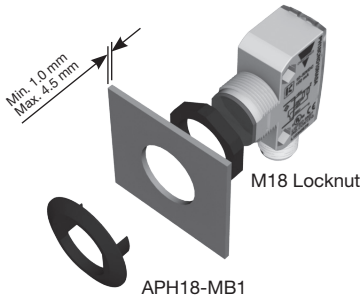





PH18 mounting with a combination of 1 x APH18-MB1 and 1 x M18 locknut.
Maximum torque 0.9 NM

Dimensions

Cable/Pigtail version




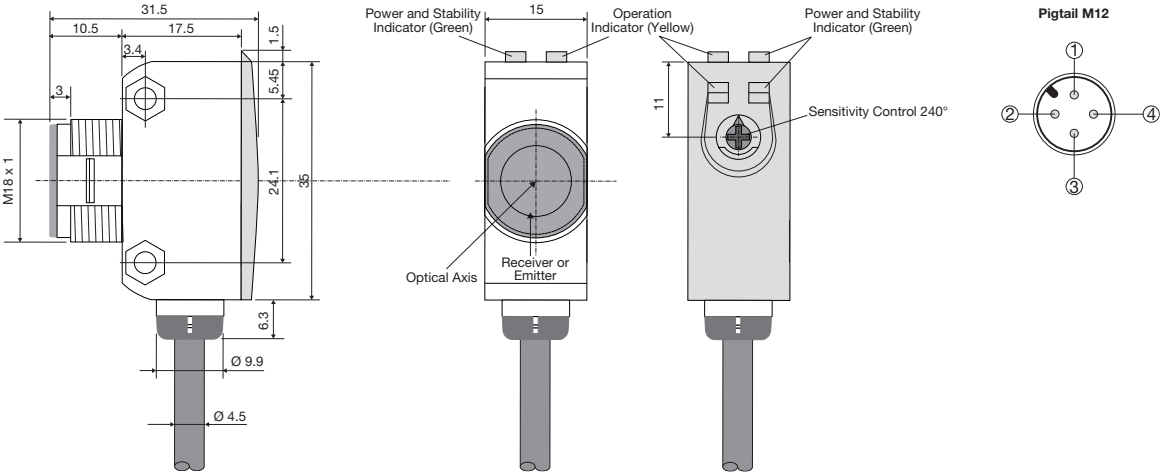


Plug version

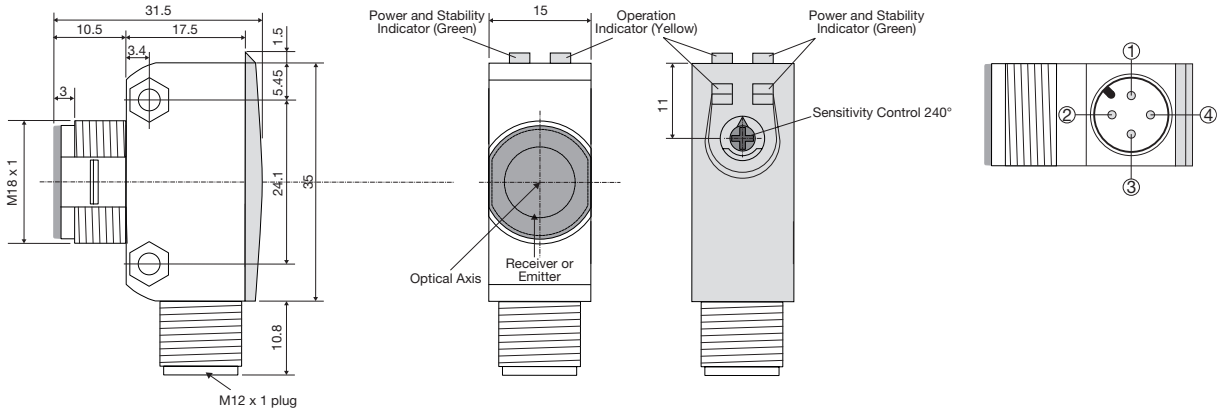

ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru
Sensoren

Installation Hints

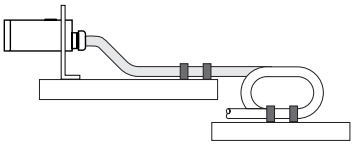To avoid interference from inductive voltage / current peaks, separate the proximity switch cables from any other power cables. E.g. Engine, contactor or solenoid cables 	*Relief of the cable strain*  *The cable should not be pulled*	*Protection of the sensing face*  *A proximity switch should not serve as mechanical stop*	*Sensor mounted on a mobile carrier*  *Any repetitive flexing of the cable should be avoided*

Delivery Contents

- Photoelectric switch: PH 18 CNT...
- Installation instruction on plastic bag
- Screwdriver
- Mounting bracket APH18-MB1
- 1 M18 locknuts
- **Packaging:** Plastic bag
- Emitter and receiver is packed separately

Accessories

- Connector type CON.14NF..W series

ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru

Sensoren