LVM25240

LEVEL MONITORING RELAY, MODULAR VERSION, MULTI-VOLTAGE. EMPTYING OR FILLING FUNCTION. AUTOMATIC RESETTING, 24...240VAC/DC



Product designation		Level control relay for emptying or filling function. Multi voltage. Modular version
Product type designation		LVM25
Function		Emptying or filling
Auxiliary supply		
Supply voltage Type		Multi voltage
Rated voltage Us		24…240VAC/DC
Operating voltage range		0.85...1.1 Us
Rated frequency	Hz	50/60
Power consumption Max	VA	3
Power dissipation Max	W	1.2
Output characteristics		
Number of connectable electrodes	Nr.	3
Type of electrode		Electrode and electrode holders: SN1 / SCM / CGL / PS31 / PS3S or similar
Electrode voltage		10 Vpp
Sensitivity	kΩ	2.5...100 adjustable
Time delay		
Tripping time	s	≤1
Resetting time	s	≤1
Relay outputs		
Number of relays	Nr.	1
Relay state		Normally de-energised, energises at tripping
Contact arrangement		1 changeover contact C/O-SPDT
Rated operational voltage AC (IEC)	VAC	250
Maximum switching voltage	VAC	400
IEC Conventional free air thermal current Ith	A	8
UL/CSA and IEC/EN 60947-5-1 designation		B300
Electrical life (with rated load)	cycles	10^5
Mechanical life	cycles	$30x10^6$
Indications		

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

LVM25240


LEVEL MONITORING RELAY, MODULAR VERSION, MULTI-VOLTAGE. EMPTYING OR FILLING FUNCTION. AUTOMATIC RESETTING, 24...240VAC/DC

Indication			1 green LED for power on 1 red LED for relay state
Functions			
3 detecting electrodes (MIN, MAX and COM)			Yes
5 detecting electrodes (MIN1, MAX1, MIN2, MAX2 and COM			No
Sensitivity adjustment 2.5...50k Ω			No
Sensitivity adjustment 2.5...100k Ω			Yes
Sensitivity adjustment 2.5...200k Ω			No
Adjustable sensitivity full-scale value 25-50-100-200 k Ω			No
Separate sensitivity adjustment for MAX probe (foam detection)			No
Emptying function			Yes
Filling function			Yes
Emptying function with MIN and/or MAX alarm			No
Filling function with MIN and/or MAX alarm			No
Emptying function with pump priority change			No
Filling function with pump priority change			No
Tank filling, well drawing and alarm			No
Filling-emptying adjustment selector			Yes
Programming selector for 5 different			No
Motor start-up priority change			No
Connections			
Terminals type			Screw
Tightening torque for terminals			
	max	Nm	0.8
	max	lbin	7
Conductor cross section			
AWG/Kcmil			
	min	AWG	24
	Max	AWG	12
IEC			
	min	mm²	0.2
	Max	mm²	4
Insulations			
Rated insulation voltage Ui		V	240
Rated impulse withstand voltage Uimp		kV	4
Operating frequency withstand voltage		kV	2
Double insulation Supply / relay / electrode		VAC	≤250
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-20
	max	°C	+60
Storage temperature			
	min	°C	-30
	max	°C	+80
Housing			
Execution			Modular DIN rail mounting
N° of modules			1
Material			Self-extinguishing polyamide


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

Mounting		35mm DIN rail (IEC/EN 60715) or by screws using extractable clips
IEC degree of protection		IP40 on front / IP20 on terminals
Dimensions (W x H x D)	mm	17.5 x 104.7 x 64.9
Weight	g	95

Dimensions

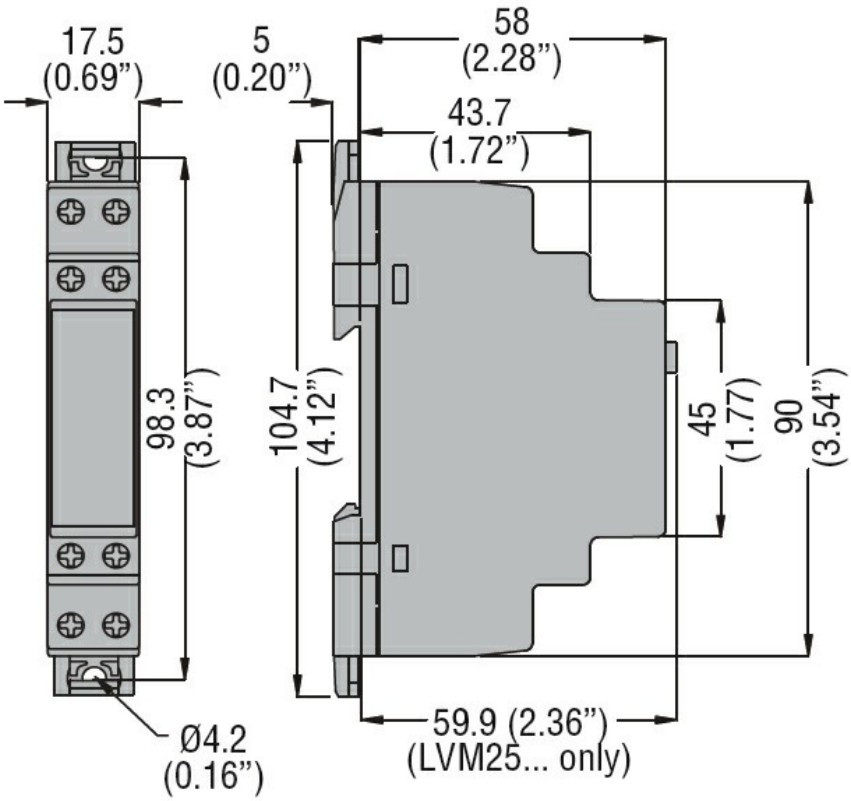

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN 60255-5
IEC/EN 61000-6-2
IEC/EN 61000-6-3
UL508

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

Certificates

	cULus
	EAC

ETIM classification

ETIM 8.0	EC001447 - (Fill) level monitoring relay

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding