Photoelectrics
Level Sensors
Type VP, Unmodulated

CARLO GAVAZZI



- **Sensor for liquid level detection**
- **Built-in amplifier, Ga-As diode**
- **Output: Transistor NPN/PNP or SCR, NO or NC**
- **High chemical resistance to most acids and bases**
- **VP01/03: Output OFF when sensor in liquid**
- **VP02/04: Output ON when sensor in liquid**
- **No electrical or thermal connection between liquid and electrical circuit**
- **DC types: LED-indication for output ON**
- **Power supply: DC types: 10 to 40 VDC**
  AC types: 110 or 230 VAC

CE

Product Description

Optical level sensor with unmodulated, infrared light for the detection of liquids. Fitted with built-in amplifier. Transmitter and receiver are completely self-contained in solid plastic housing designed for mounting into container wall. VP01/02 are available in a Polysulphone housing resistant to most acids and bases. VP03/04 are available in a Polyamide 12 housing resistant to various solvents.

Ordering Key

VP 0 3 E P

- **Type**
- **Housing**
- **Output status**
- **Output type**
- **PNP output**

Type Selection - DC Types

Housing material	Ordering no. Transistor NPN Make switching	Ordering no. Transistor NPN Break switching	Ordering no. Transistor PNP Make switching	Ordering no. Transistor PNP Break switching
Polysulphone	**VP 02 E**	**VP 01 E**	**VP 02 EP**	**VP 01 EP**
Polyamide 12	**VP 04 E**	**VP 03 E**	**VP 04 EP**	**VP 03 EP**

Type Selection - AC Types

Housing material	Ordering no. Make switching 110 VAC	Ordering no. Break switching 110 VAC	Ordering no. Make switching 230 VAC	Ordering no. Break switching 230 VAC
Polysulphone	**VP 02-110TB**	**VP 01-110TB**	**VP 02-230TB**	**VP 01-230TB**

Specifications

	Transistor NPN/PNP	SCR output AC types
Rated operational voltage	10 - 40 VDC	110 VAC: 100 - 121 VAC, 45 - 60 Hz 230 VAC: 195 - 265 VAC, 45 - 60 Hz
Rated operational current Continuous	200 mA	10 - 100 mA
Voltage drop	≤ 1.0 VDC	≤ 9.0 VAC
No-load supply current	≤ 12 mA	≤ 7 mA
Sensing accuracy Liquid level difference	Horizontal mounting: ± 5 mm Vertical mounting: ± 2.5 mm	Horizontal mounting: ± 5 mm Vertical mounting: ± 2.5 mm
Ambient light	0 - 100 lux	0 - 100 lux
Frequency of operating cycles (f)	30 Hz	5 Hz

ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru

Sensoren

CARLO GAVAZZI

Specifications (cont.)


	Transistor NPN/PNP	SCR output AC types
Environment		
Degree of protection	IP 67	IP 67
Operating temperature	-20° to +70°C (-4° to +158°F)	-20° to +70°C (-4° to +158°F)
Storage temperature	-40° to +100°C (-40° to + 212°F)	-40° to +100°C (-40° to + 212°F)
Indication for output status	LED, yellow	
Housing and tip material		
VP01/02	Polysulphone	Polysulphone
VP03/04	Polyamide 12	
Weight	90 g	90 g
Connection	Cable (PVC), 2 m Ø4,1 mm, 3 x 0,25 mm2	Cable (PVC), 2 m Ø5,2 mm, 2 x 0,5 mm2
Pressure	10 bar at + 60ºC	10 bar at + 60ºC
Pipe thread	3/8" PT	3/8" PT
CE-marking	Yes	Yes

Mode of Operation


The sensor contains IR transmitter, receiver and amplifier with transistor or SCR output. The light source is a Ga-As diode emitting infrared light.

The conical tip of the sensor forms an angle of 90ºC. This angle acts as a prism, i.e. the beam, emitted from the Ga-As diode placed in one side of the sensor head, is reflected internally to the phototransistor placed in the other side of the sensor head, provided that the tip of the sensor is situated in free air. If the sensor tip is immersed in a liquid, always having a refractive index different from air, the beam will not be refracted by the prism and the photo transistor will not receive any signal.


The sensor types can operate in oil, waste water, aqueous solutions such as beer, wine, alcohol etc. without any kind of accessory.

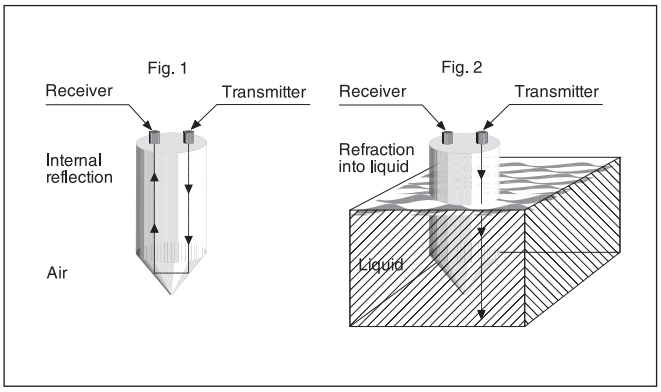


Wiring Diagrams




VP01E, VP03E




VP01EP, VP03EP




VP02E, VP04E



VP02EP, VP04EP




VP01-...TB



VP02-...TB

Dimensions

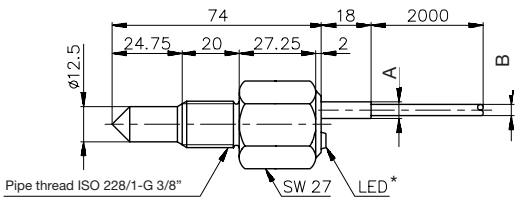

	DC types	AC types
A mm	Ø 6.0	Ø 6.7
B mm	Ø 4.1	Ø 5.2





* DC types

ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru

Sensoren

CARLO GAVAZZI

Installation Hints

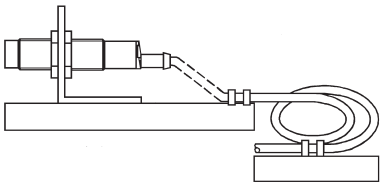To avoid interference from inductive voltage/ current peaks, separate the prox. switch power cables from any other power cables, e.g. motor, contactor or solenoid cables	*Relief of cable strain*	*Protection of the sensing face*	*Switch mounted on mobile carrier*
			
	The cable should not be pulled	A proximity switch should not serve as mechanical stop	Any repetitive flexing of the cable should be avoided

ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru

Sensoren