51ADX1200

SOFT STARTER, ADX... TYPE, FOR SEVERE DUTY (STARTING CURRENT 5•IE). PREDISPOSED FOR EXTERNAL BY-PASS CONTACTOR, 1200A



Product designation				Soft Starter
Product type designation				ADX
Motor type				Asynchronous three phase
Electrical features				
Supplies voltage				
		Type of system		Three phase
		Rated supply voltage	V	208…415VAC
		auxiliary supply voltage (Us)		208…240VAC
		Rated frequency	Hz	50/60
Rated starter current Ie			A	1200
Rated motor power				
	IEC ratings (T≤40°C)			
		230VAC	kW	355
		400VAC	kW	710
		500VAC	KW	800
	UL ratings (T≤40°C)			
		220-240VAC	HP	450
		380-415VAC	HP	900
		440-480VAC	HP	900
Number of controlled phases			Nr.	3
Built-in bypass				No, predisposed for external bypass contactor
Cooling System				Forced
Programming interface				
Display				Backlit LCD 2x16 character
Programming with NFC technology				No
Optical port				No
Startup and stop settings				
Startup method				Torque or voltage ramp with current limitation
Stop method				Torque ramp, voltage ramp, free-wheel stop
Braking method				DC dynamic with external relay
Protections				
Auxiliary supply protection				Voltage too low

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

Power supply Protection	No power, phase loss, phase sequence, frequency out of limits, minimum and maximum voltage
Motor protection	Overload at starting (trip class 2, 10A, 10, 15, 20, 25, 30, 35 and 40), overload during running (trip class 2, 10A, 10, 15, 20, 25 and 30), locked rotor, current asymmetry, minimum torque (dry run),
Starter protection	Overcurrent, overtemperature, bypass failure, phase shorted, temperature sensor fault, maintenance request
Functions	
Built-in bypass	No
Built-in display and keypad	No
Languages	4
View measurements	Yes
Torque control	Yes
Adjustable current limit	Yes
Dynamic braking	Yes
Kick Start function	Yes
Motor overload electronic protection	Yes
Motor protection PTC input	Yes
Protection against phase loss	Yes
Protection against phase inversion	Yes
Protection against locked rotor	Yes
Protection against thyristor overtemperature	Yes
Protection against low load	Yes
Programmable alarm	Yes
Digital inputs	3
Analog inputs	1
Digital outputs	4
Analog output	1
Monitoring communication	Yes
Optical port for programming	No
Event log	No
Motor hour counter	Yes
Startup counter	Yes
Clock calendar	Yes

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

Remote external keypad			Yes
Input and Output			
Digital inputs			
	Number of digital input	Nr.	3 (2 digital inputs + 1 digital/analog input)
	Digital input type		24VDC (no need for external feeder)
	Digital input functions		1 input for start, 1 input programmable (stop, free-wheel stopping, external alarm, motor preheat, local control, alarms inhibit, manual resetting of motor thermal protection, keypad lock, second moto
Analog inputs			
	Number of analog input	Nr.	1 (digital/analog)
	Analog input type		0-10VDC (0-20mA with external resistor 500Ω)
	Analog input functions		Motor protection via PTC probes, acceleration and/or deceleration ramp via analog input, analog input thresholds for motor starting and stopping, analog input thresholds for programmable relay enable
Digital outputs			
	Number of digital output	Nr.	4
	Digital output arrangement		3 x 1 NO (SPST) + 1 C/O (SPDT) Ratings: 5A 250VAC AC1, 2A 250VAC AC15


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

		Digital output functions		C/O output for global alarm, 3 x 1NO outputs programmable (OFF, motor powered, up to speed, braking, current limit, service required, cascade starting, programmable input thresholds, alarm Axx)
Analog outputs				
		Number of analog output	Nr.	1
		Analog output type		0...20mA, 4...20mA (0...10V with external resistor 500Ω)
		Analog output functions		Current, torque, motor thermal status, power factor and active power
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-10
		max	°C	+55°C (with current derating >45°C of 1.5%/°C)
	Storage temperature			
		min	°C	-30
		max	°C	+70
Max altitude			m	1000 without derating (over 1000mt with current derating of 0.5%/100m)
Relative humidity			%	95% without condensation or dripping
Pollution degree				3
Housing				
Mounting				Screw-fixing
IP degree of protection				IP00
Dimensions (W x H x D)			mm	910 x 950 x 442
Weight			Kg	234
Dimensions				

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

51ADX1200

SOFT STARTER, ADX... TYPE, FOR SEVERE DUTY (STARTING CURRENT 5•IE).
PREDISPOSED FOR EXTERNAL BY-PASS CONTACTOR, 1200A

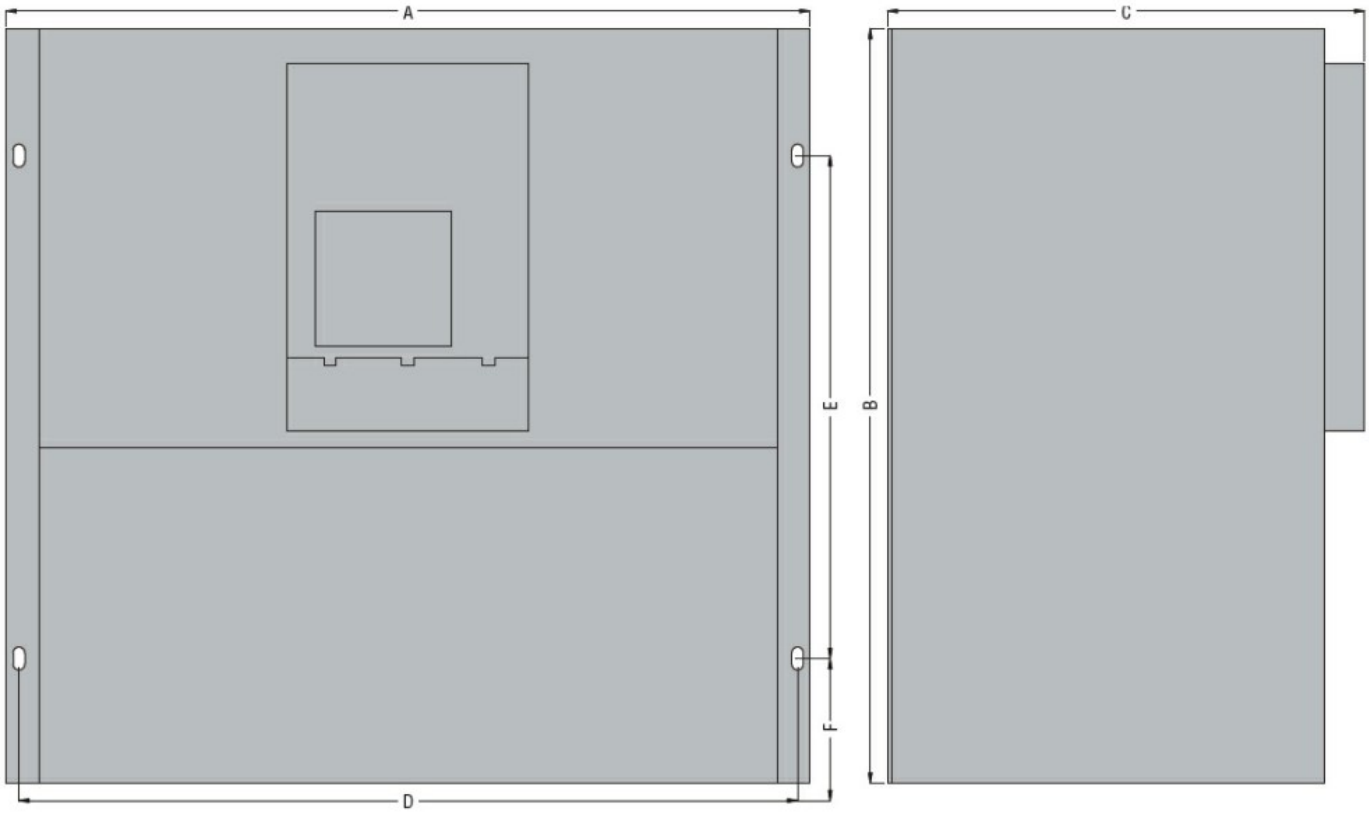

TYPE	A	B	C	D	E	F
ADX 0310	640 (25.20")	600 (23.62")	380 (14.96")	620 (24.41")	400 (15.75")	100 (3.94")
ADX 0365	640 (25.20")	600 (23.62")	380 (14.96")	620 (24.41")	400 (15.75")	100 (3.94")
ADX 0470	790 (31.10")	650 (25.59")	430 (16.93")	770 (30.31")	450 (17.72")	100 (3.94")
ADX 0568	790 (31.10")	650 (25.59")	430 (16.93")	770 (30.31")	450 (17.72")	100 (3.94")
ADX 0640	790 (31.10")	650 (25.59")	430 (16.93")	770 (30.31")	450 (17.72")	100 (3.94")
ADX 0820	910 (35.83")	950 (37.40")	442 (17.40")	830 (32.68")	920 (36.22")	❶
ADX 1200	910 (35.83")	950 (37.40")	442 (17.40")	830 (32.68")	920 (36.22")	❶

❶ Consult Customer Service; see contact details on inside front cover.

Certifications and compliance

Compliance

	IEC/EN 60947-1
	IEC/EN 60947-4-2

Certificates

	EAC

ETIM classification

ETIM 8.0	EC000640 - Soft starter

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding