Proximity Sensors Capacitive Stainless Steel Housing Type EC, M30, AC

TRIPLESHIELD™

CARLO GAVAZZI



- Featuring ***TRIPLESHIELD***™ sensor protection
- Rated operational voltage: 20-250 VAC
- Adjustable sensing distance 2-16 mm or 4-25 mm
- Output: SCR
- Make and break switching function
- LED indication
- High noise immunity
- Flush and non-flush types
- Plug and cable versions available
- DC versions in the same housing

Product Description

Capacitive proximity switches with either sensing distance 16 mm flush mounted or 25 mm sensing distance non-flush mounted. 2-wire AC output with a switch for choosing NO and NC switching. M30 stainless steel housing with 2 m PVC cable or plug. Ideal for use in level and plastic machinery applications. Both types are available in polyester housings.

Ordering Key

EC 3025 TBA S L-6

- **Capacitive proximity switch**
- **Housing diameter (mm)**
- **Rated operating dist. (mm)**
- **Output type**
- **Housing material**
- **Housing type**
- **Connection type**

Type Selection

Housing diameter	Rated operating dist. (S_n) [1]	Mounting	Ordering no. SCR, cable Make & break switching	Ordering no. SCR, plug Make & break switching
M30	16 mm	Flush (built-in)	**EC 3016 TBASL**	**EC 3016 TBASL-6**
M30	25 mm	Non-flush	**EC 3025 TBASL**	**EC 3025 TBASL-6**

[1] Object: Grounded steel plate

Specifications

Rated operating dist. (S_n)	
3016:	2 to 16 mm factory set at 16 mm
3025:	4 to 25 mm factory set at 25 mm
Sensitivity	Adj. multiturn pot.meter
Effective operating dist. (S_r)	$0.9 \times S_n \le S_r \le 1.1 \times S$
Usable operating dist. (S_u)	$0.8 \times S_r \le S_n > 1.2 \times S_r$
Repeat accuracy (R)	≤ 5%
Hysteresis (H)	4 to 20% of sensing distance
Rated operational volt. (U_B)	20 to 250 VAC (ripple included)
Ripple	≤ 10%
Rated operational current (I_e)	
Continuous	≤ 500 mA
Short-time	< 2.5 A (max. 20 ms)
Min. load current	10 mA
OFF-state current (I_r)	< 2.5 mA (@ 240 VAC) 1.7 mA (@ 120 VAC)
Voltage drop (U_d)	≤ 10 VAC (at loads ≥ 20 mA)
Protection	Transients


Power ON delay	≤ 100 ms
Frequency of operating cycles (f)	10 Hz
Indication for output ON	LED, yellow
Environment	
Degree of protection	IP 67 (Nema 1, 3, 4, 6, 13)
Temperature	
Operating temperature	-25° to +80°C (-13° to +176°F)
Storage temperature	-40° to +85°C (-40° to +185°F)
Housing material	
Body	Stainless steel (St 304)
Front	Grey, polyester
Cable end	Polyester
Nuts	Nickel plated brass
Connection	
Cable	Grey, 2 m, 2 x 0.5 mm^2 Oil proof, PVC
Plug (-6)	M12 x 1 double keyed
Cable for plug (-6)	CON.6A-.. series
Weight (incl. nuts)	**3016:** 140 g **3025:** 150 g
Approvals	UL
CE-marking	Yes

ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru


Sensoren

CARLO GAVAZZI

Dimensions

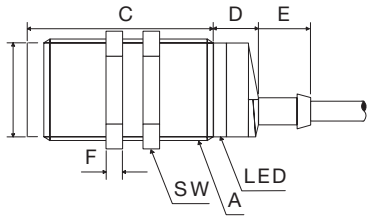

Cable

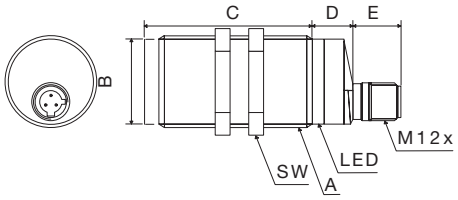


Plug

Type	A	B Ø mm	C mm	D mm	E mm	F mm	SW mm
EC 3016TBASL(-6) 36	M30 x 1.5 x 50	28	50	13.6	15.4	5	
EC 3025TBASL(-6)	M30 x 1.5 x 50	28	62	13.6	15.4	5	36

Adjustment Guide

The environments in which capacitive sensors are installed can often be unstable regarding temperature, humidity, object distance and industrial (noise) interference. Because of this, Carlo Gavazzi offers as standard features in all *TRIPLESHIELD*™ capacitive sensors a user-friendly sensitivity adjustment instead of having a fixed sensing range, extended sensing range to accommodate mechanically demanding areas, temperature stability to ensure minimum need for adjusting sensitivity if temperature varies and high immunity to electromagnetic interference (EMI).

Note:
Sensors are factory set (default) to maximum rated sensing range.

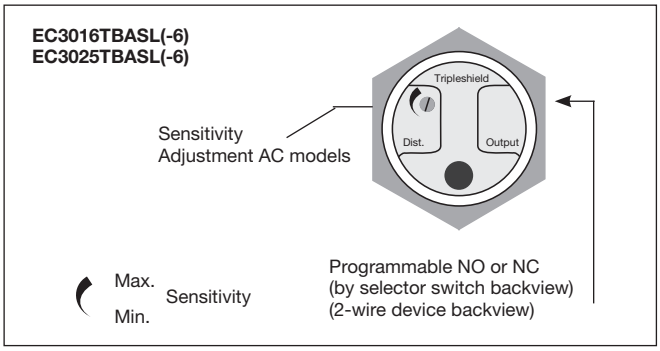


Installation Hints

Capacitive sensors have the unique ability to detect almost all materials, either in liquid or solid form. Capacitive sensors can detect metallic as well as non-metallic objects, however, their traditional use is for non-metallic materials such as:


- **Plastic Industry**
  Resins, regrinds or moulded products.
- **Chemical Industry**
  Cleansers, fertilisers, liquid soaps, corrosives and pe--trochemicals.
- **Wood Industry**
  Saw dust, paper products, door and window frames.
- **Ceramic & Glass Industry**
  Raw material, clay or finished products, bottles.
- **Packaging Industry**
  Package inspection for level or contents, dry goods, fruits and vegetables, dairy products.

Materials are detected due to their dielectric constant. The bigger the size of an object, the higher the density of material, the better or easier it is to detect the object. Nominal sensing distance for a capacitive sensor is referenced to a grounded metal plate (ST37). For additional information regarding dielectric ratings of materials please refer to Technical Information.

To avoid interference from inductive voltage/ current peaks, separate the prox. switch power cables from any other power cables, e.g. motor, contactor or solenoid cables




Relief of cable strain




The cable should not be pulled

Protection of the sensing face



A proximity switch should not serve as mechanical stop


Switch mounted on mobile carrier

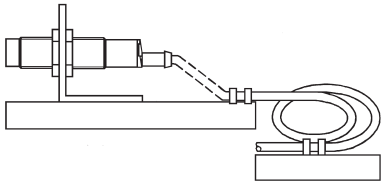

Any repetitive flexing of the cable should be avoided

ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru
Sensoren

Wiring Diagram

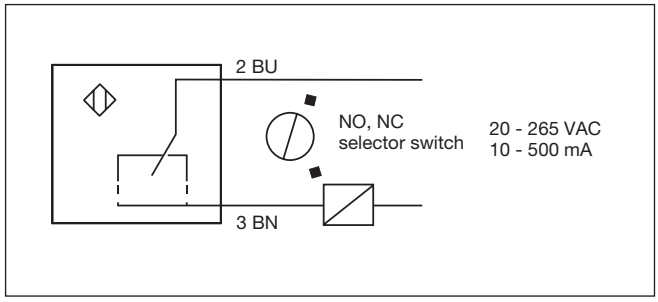

Delivery Contents

- Capacitive switch: EC 30.. TBASL(-6)
- Screw driver
- 2 nuts
- **Packaging:** Cardboard box
- Installation & Adjustment Guide (MAN CAP ENG/GER)

Accessories

- Plugs CON.6A-.. serie

ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru
Sensoren