# Photoelectrics
# Retro-reflective, Polarized, Relay Output
# Type PMP




- **Range: 6 m**
- **Modulated, visible light, polarized**
- **Make or break switching function (switch selectable)**
- **LED-indication for target detected**
- **Multi supply voltage:**
  **12 to 240 VDC and**
  **24 to 240 VAC, 50/60 Hz**
- **25 x 65 x 81 mm reinforced PC/ABS- housing, IP 67**
- **Timer options (adjustable)**
- **NO and NC output**

## Product Description

Retro-reflective photoelectric switch with polarized light. Range up to 6 m. Fixed sensitivity. Immune to ambient light. Output function switch selectable. Protection degree IP 67. Screw terminal connection. 25 x 65 x 81 mm plastic housing. PG 13.5 or 1/2" NPT cable gland. Timer options: Delay on operate, delay on release, one shot (triggered on leading or trailing edge).

## Ordering Key

**PMP 6 R G T**

- **Type**
- **Range**
- **Output**
- **Cable gland type**
- **Timer function**

## Type Selection

| Housing<br>W x H x D | Range<br>($S_n$) | Ordering no.<br>with timer |
|---|---|---|
| 25 x 65 x 81 | | |
| PG 13.5 cable gland | 6 m | **PMP 6R GT** |
| 1/2" NPT cable gland | 6 m | **PMP 6R IT** |

## Specifications

| | |
|---|---|
| **Rated operating dist.** ($S_n$)<br>(0 to 5,000 lux) | PMP6.. 6 m<br>with reflector type ER 4, ref. target |
| **Blind zone** | ≤ 0.15 m |
| **Rated operational volt.** ($U_B$)<br>AC: 45 to 65 Hz | 10.8 to 264 VDC<br>21.6 to 264 VAC |
| **Rated operational power**<br>(relay ON) | ≤ 2 W (2.5 VA) |
| **Output** | |
| Contact ratings (AgCdO) | µ (micro gap) |
| Resistive loads AC 1 | 3 A/250 VAC |
| DC 1 | 3 A/30 VDC |
| Small inductive loads AC 15 | 2 A/250 VAC |
| DC 13 | 3 A/30 VDC |
| Mechanical life (typical) | ≥ 40 x $10^6$ operations |
| Electrical life (typical) | ≥ 5 x $10^5$ operations at 220 VAC - 3 A resistive load: 360 impulses/h |
| **Dielectric voltage** | 2,000 VAC (rms) (cont./supply) |
| **Sensitivity** | Fixed |
| **Light source** | GaAlAs, LED, 660 nm |
| **Light type** | Visible, modulated |
| **Optical angle** | ±2° |
| **Light spot size** | 280 mm at 4 m |

| | |
|---|---|
| **Operating frequency** | 20 Hz |
| **Response time** | |
| OFF-ON ($t_{ON}$) | ≤ 20 ms |
| ON-OFF ($t_{OFF}$) | ≤ 30 ms |
| **Power ON delay** ($t_v$) | ≤ 300 ms (typ. 100 ms) |
| **Output function** | Switch selectable, make or break switching |
| **Indication** | |
| Target detected | LED, yellow |
| **Optional timer** | |
| Delay on operate | 0.1 to 7 s ± 2 s |
| Delay on release | 0.1 to 7 s ± 2 s |
| One shot | 0.1 to 7 s ± 2 s |
| **Environment** | |
| Overvoltage category | III (IEC 60664/60664A; 60947-1) |
| Pollution degree | 3 (IEC 60664/60664A; 60947-1) |
| Degree of protection | IP 67 (IEC 60529; 60947-1) |
| **Temperature** | |
| Operating | -25° to +55°C (-13° to +131°F) |
| Storage | -30° to +80°C (-22° to +176°F) |



ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru
Sensoren

CARLO GAVAZZI


## Specifications (cont.)

| | |
|---|---|
| **Vibration** | 10 to 150 Hz, 0.5 mm/7.5 g (IEC 60068-2-6) |
| **Shock** | 2 x 1 m & 100 x 0.5 m (IEC 60068-2-32) |
| **Rated insulation voltage** | 250 VAC (rms) |
| **Housing material** | |
| Body | PC/ABS, grey |
| Front | PMMA, red |
| Cover | PC, black |
| Cable gland | PA, black, reinforced |
| Mounting bracket | Steel, black |
| **Connection** | |
| Screw terminal | 5 x 2 x 1 $mm^2$ |
| Cable gland | PG 13.5 or 1/2" NPT for cable 6 to 10 mm |
| **Weight** | 110 g |
| **Approvals** | UL, CSA |
| **CE-marking** | Yes |

## Truth Table

| | Make switching | | Break switching | |
|---|---|---|---|---|
| Object present | Yes | No | Yes | No |
| LED | OFF | ON | OFF | ON |
| Load | Non-active | Active | Active | Non-active |

## Connection Diagram

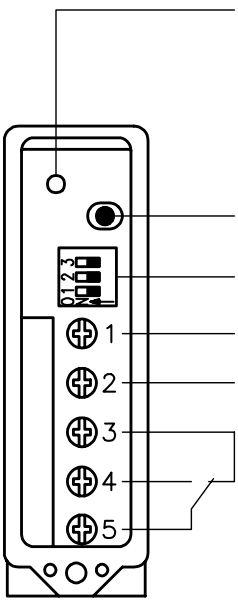


## Selection of Function




1 Delay on operate - Break switching

2 Delay on operate - Make switching

3 Delay on release - Break switching

4 Delay on release - Make switching

5 One shot, trailing edge - Break switching

6 One shot, trailing edge - Make switching


7 One shot, leading edge - Break switching

8 One shot, leading edge - Make switching


Upper postion ON (Mode 1)
Lower position OFF (Mode 0)

## Installation Hints

*To avoid interference from inductive voltage/ current peaks, separate the prox. switch power cables from any other power cables, e.g. motor, contactor or solenoid cables*





*Relief of cable strain*





The cable should not be pulled

*Protection of the sensing face*



A proximity switch should not serve as mechanical stop

*Switch mounted on mobile carrier*

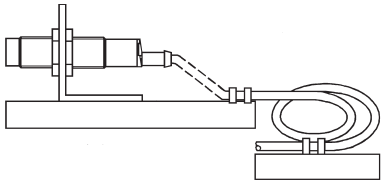

Any repetitive flexing of the cable should be avoided




ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru

Sensoren


CARLO GAVAZZI

## Operation Diagram

t = Time delay
tv = Power ON delay

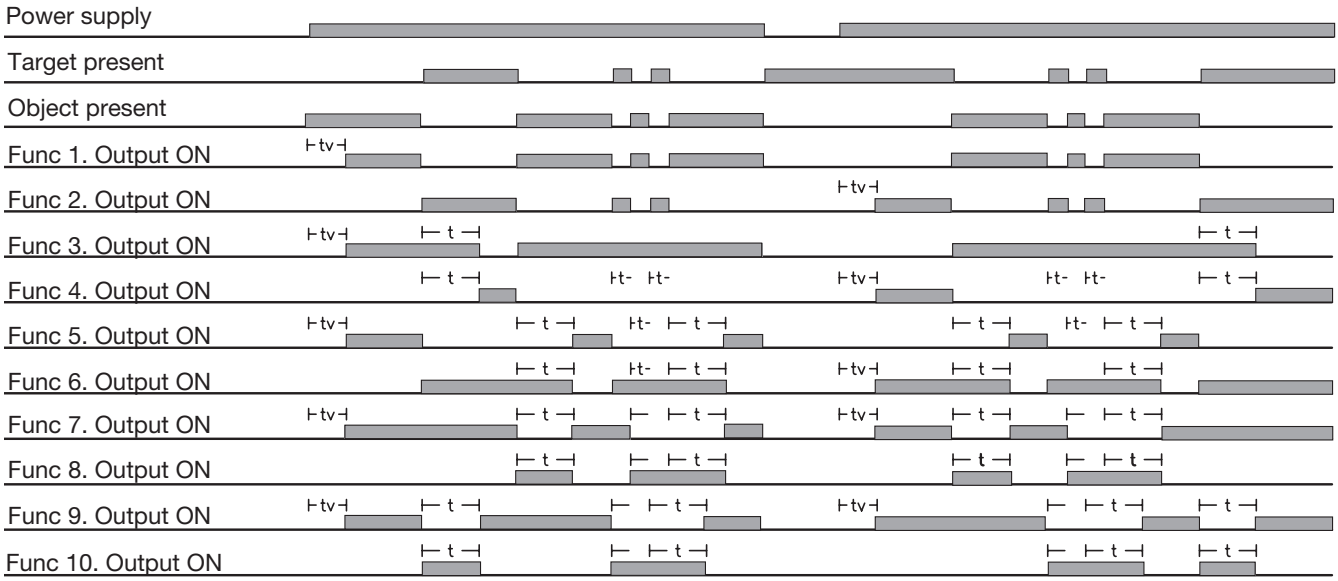


## Dimensions

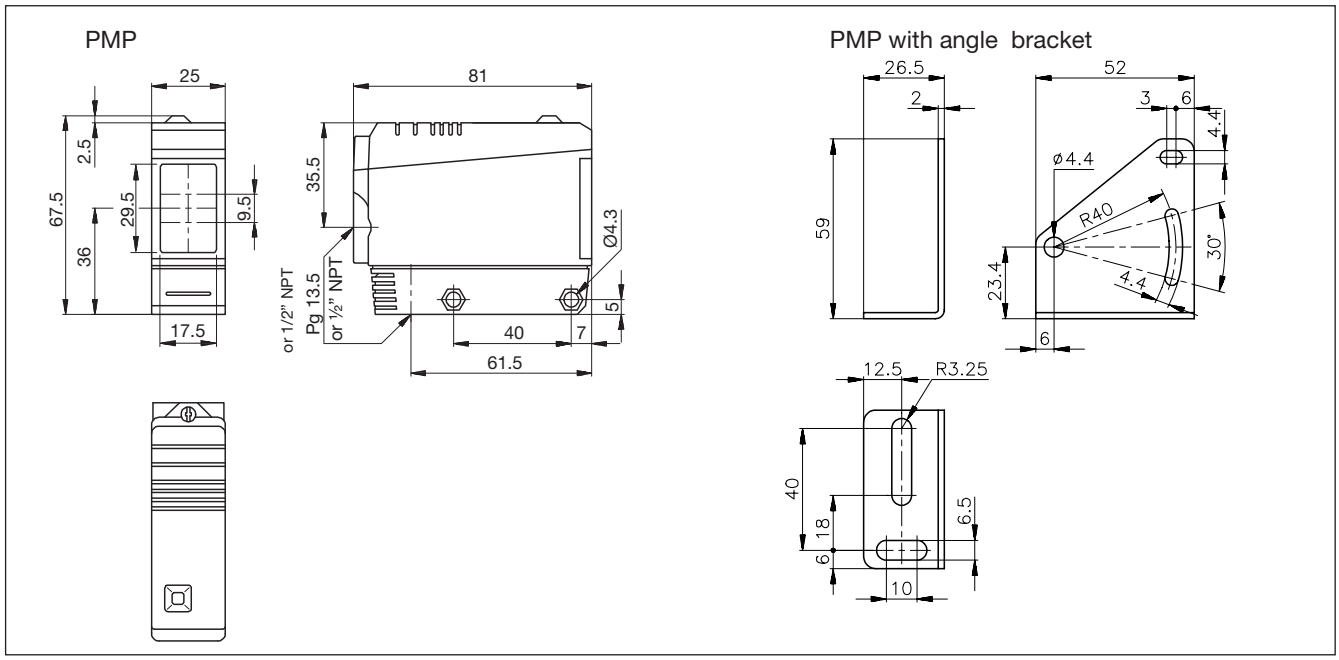


## Accessories

- Reflectors: ER series
- MB02 (longer mounting bracket)

## Delivery Contents

- Photoelectric switch: PMP
- Cable gland
- Installation instruction
- Mounting bracket
- **Packaging:** Corrugated cardboard (environmentally friendly recycling material)



ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru
Sensoren