

EV-118USO(2066)

EV-118U Specially Ordered

CE

*Please note that accessories depicted in the image are for illustrative purposes only and may not be included with the product.

Specifications


Model		EV-118USO(2066)*1
Type		Non-shielded
Shape		M18
Detecting distance		15 mm 0.59" ±10%
Detectable object		Ferrous metals (see Characteristics for nonferrous metals)
Standard target (iron, t=1 mm 0.04")		50 x 50 mm 1.97"
Hysteresis		20% max. of detecting distance, within -10 to +70°C 14 to 158°F
Response frequency		350 Hz
Operation mode		N.O.
Temperature characteristics		±10% max. of detecting distance, within -10 to +70°C 14 to 158°F
Control output (switching capacity)		5 to 200 mA
Protection circuit		Reversed polarity, short-circuit, surge voltage
Cable length		500 mm19.685"
Rating	Power voltage	12 to 24 VDC
	Current consumption (leakage current)	Current consumption (leakage current): 1.0 mA max., Residual voltage: 3.6 V max. (with 2-m 6.6' cable)
	Residual voltage	Residual voltage: 3.6 V max. (with 2-m 6.6' cable)
Environmental resistance	Enclosure rating	IP67
	Ambient temperature	-25 to +80 °C -13 to 176 °F (No freezing)
	Relative humidity	35 to 95 % RH (No condensation)
Case material		Nickel-plated brass
Weight		Approx. 140 g

*1 This product does not comply with EMC directive.


I/O Circuit Connection diagram

* Download CAD file or product manual for larger image/text and more detail.


Connection to built-in DC power supply type PLC (externally connected power supply

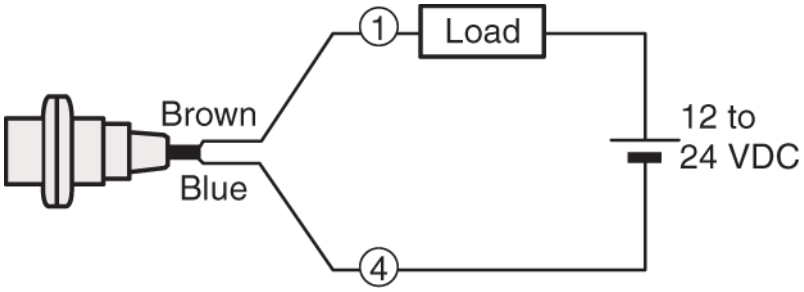


Connection to built-in DC power supply type PLC (internally connected power supply

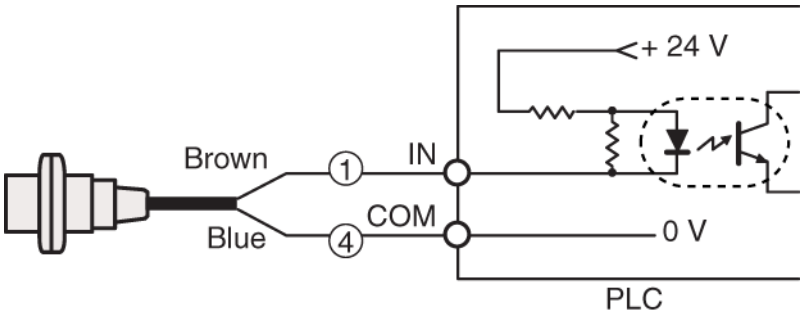


Connection to PLC having no internal DC power supply

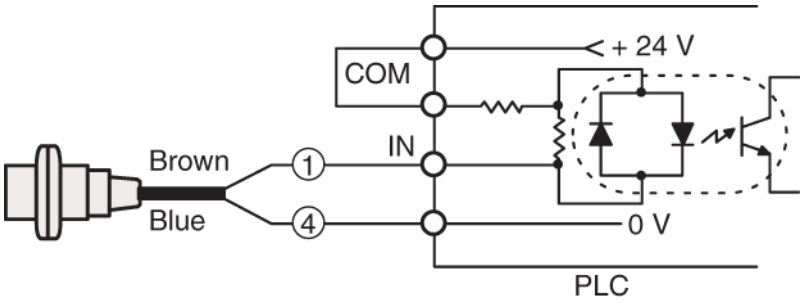

For connections indicated by the dotted lines,
reverse brown and blue sensor wires

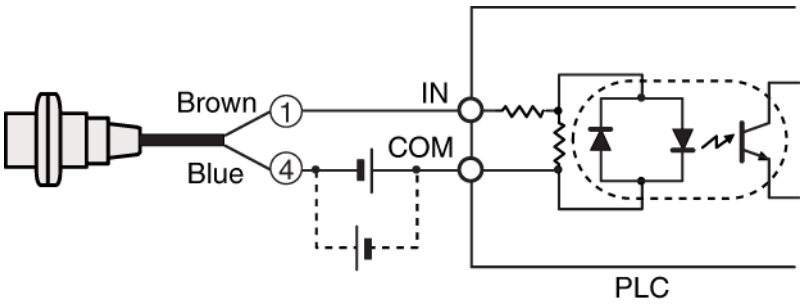


Series connection

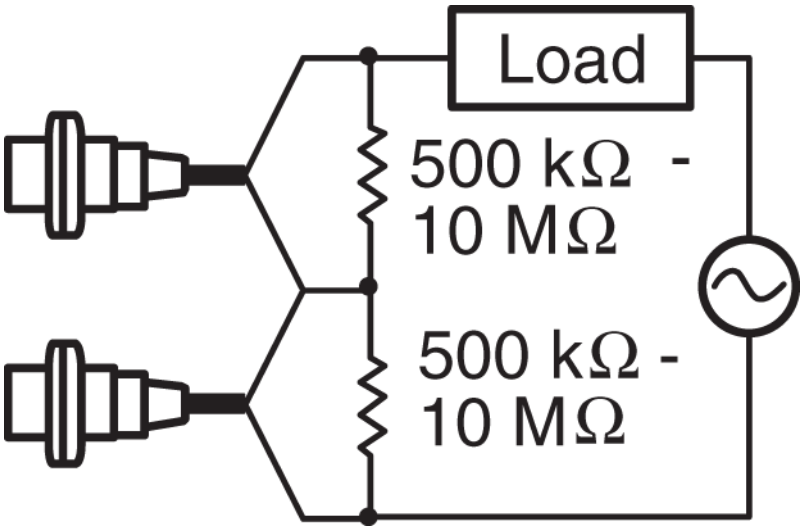

Up to 3 proximity sensors can beconnected in Series. For this, thesupply voltage must be within therange of 85 to 240 VAC. If sensoroperation is unstable, connectresistors with a resistance of 500 kWto 10 MW parallel to the sensor inorder to balance the supply voltage.

EV Series
DC 2-wire type

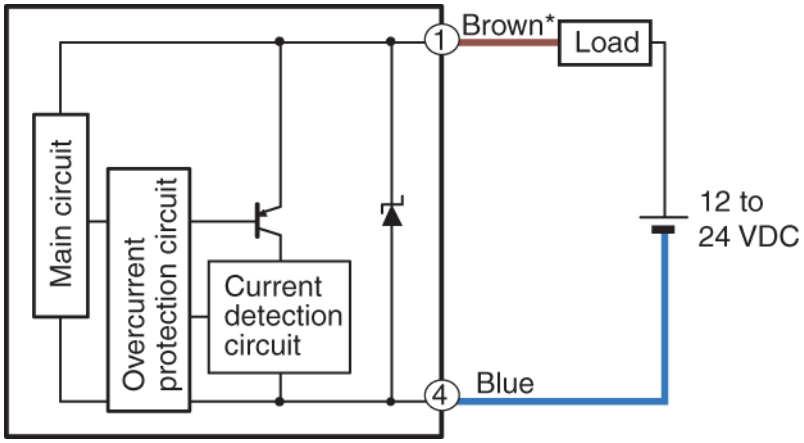

* Load can also be connected between blue wire and negative terminal of power supply.
The M8 sensor does not contain short-circuit protection or a current detection circuit.
1 and 4 in the circuit diagram shows the pin number of the connector type.

Characteristic

* Download CAD file or product manual for larger image/text and more detail.

Leakage current (Typical)

