# SMPF 7500-IO TP T4

## Fibre Sensor

Photoelectric Sensors



| Product Data | |
|---|---|
| Function | Both |
| Operation Mode | Fibre Sensor |
| Supply Voltage | 10 - 30 V dc |
| Control Feature | Sensitivity pot. and light/dark switch |
| Connection | 4 pin, M8 plug |
| Sensing Range | Dependent of fibre optic |
| Output | PNP (IO-Link) |
| Output Status | N.C./N.O. |
| Light Source | Infrared (880 nm) |
| Housing Material | Plastic |
| Housing | M18 x 1 |
| Features | IO-Link communication port |

| Technical Data | |
|---|---|
| Supply Voltage | 10 - 30 V dc |
| Voltage Ripple | 15 % |
| Reverse Polarity Protected | Yes |
| Short Circuit Protected | Yes |
| Current Consumption | 30 mA |
| Max. Output Load | 200 mA / 30 V dc |
| Max. Residual Voltage | 2 V |
| Max. Operation Frequency | 250 Hz |
| Response Time ton / toff | 2 ms / 2 ms |
| Power On Indicator | Green LED |
| Output Indicator | Yellow LED |
| Hysteresis | Approx. 3 - 10 % |
| Light Source | Infrared (880 nm) |
| Opening Angle | +/- 4° |

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.


| | |
|---|---|
| Housing Material, Front Lens | Polycarbonate |
| Housing Material, Sensor Housing | Polycarbonate |

| **Environmental Data** | |
|---|---|
| Vibration | 10 - 55 Hz, 0,5 mm |
| Shock | 30 g |
| Operation Temperature | -20 to +60 °C |
| Storage Temperature | -40 to +80 °C |
| Sealing Class | IP 67 |
| Light Immunity 15˚ | 40 000 lux |

## Approvals


CE UKCA cULus IO-Link

## Wiring Diagram

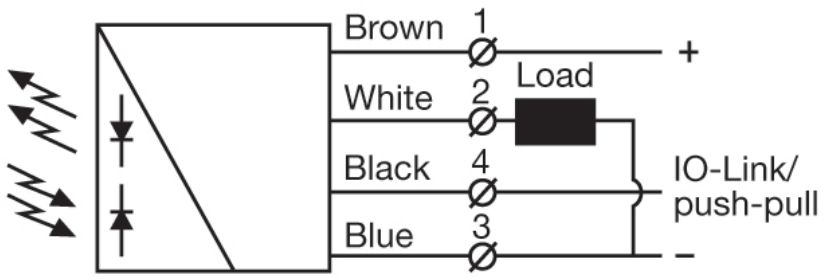



## Connections

**4 pin, M8**

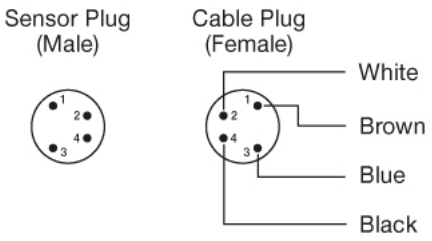


COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

## Dimensions

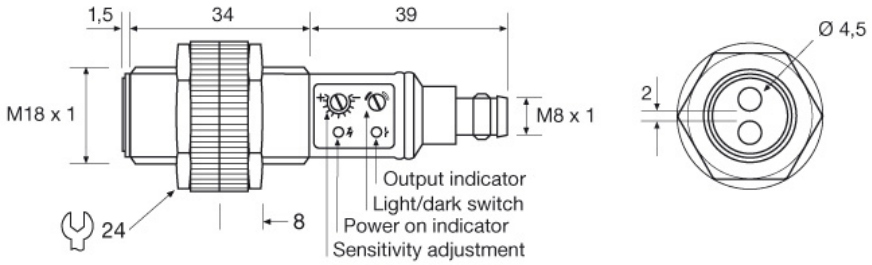


COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.