LVFSN1W15

FLOAT SWITCH FOR GREY WATER, NEOPRENE CABLE, 15MT LONG




Product designation				Float switches for grey water
Product type designation				LVFSN1
Function				Emptying or filling
Counterweights				
Counterweight				External (provided with the float switch)
Activation angle				45°
Relay outputs				
Number of relays			Nr.	1
Contact arrangement				1 changeover contact C/O-SPDT
Rated operational voltage AC (IEC)			VAC	250
Contact ratings				AC1 10A 250VAC AC15 8A 250VAC
Connections				
Maximum cable lenght			m / ft	15
Ambient conditions				
Temperature				
	Operating temperature	max	°C	+50
	Storage temperature	max	°C	80
Maximum operating pressure			bar	3
Maximum installation depth			m	30
Housing				
Cable material				Neoprene H07 RN-F3X1
Float casing material				Polypropylene
IEC degree of protection				IP68
Weight			g	2080
Dimensions				

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

LVFSN1W15

FLOAT SWITCH FOR GREY WATER, NEOPRENE CABLE, 15MT LONG

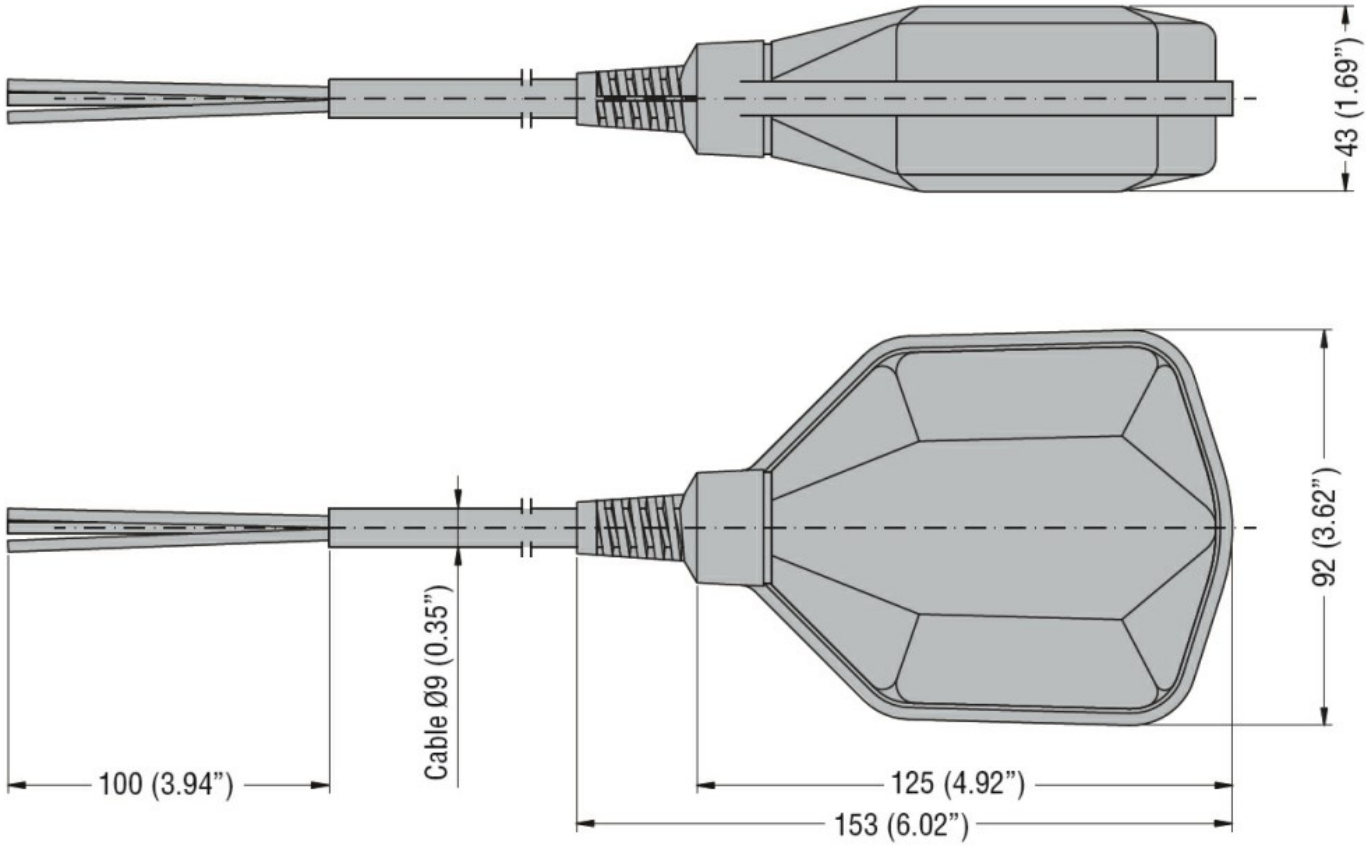

Certifications and compliance

Compliance	
	IEC/EN 60730-1
	IEC/EN 60730-2-15
Certificates	
	TÜV-SUD

ETIM classification

ETIM 8.0	EC001447 - (Fill) level monitoring relay

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding