

Model Number


V1-W-E2-BK*M-PUR-U

Cable socket, M12, LED, 3-pin, PUR cable

Features

- Suitable for drag chains
- Suitable for robotic applications / torsion resistant
- Degree of protection IP67 / IP68 / IP69K
- Free from substances that impair paint wetting
- Built-in LED, as operating and function indicator
- Resistant to microbes and hydrolysis
- UL Recognized Component
- Halogen-free
- Gold plated contacts
- Flame resistant cable
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Cable length according to specification


Dimensions

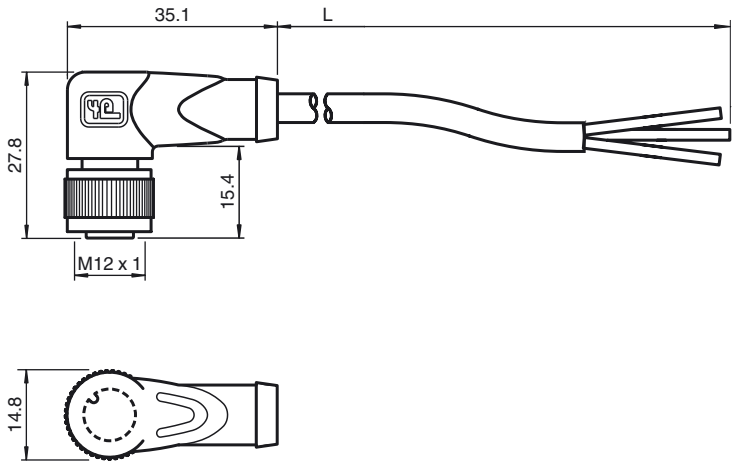

Technical data

General specifications		
Number of pins		3
Connection 1		socket
Construction type 1		right angle
Threading 1		M12
Connection 2		cable end
UL File Number		E231213
Indicators/operating means		
LED green		Operating display
LED yellow		Functional display NO contact
Electrical specifications		
Operating voltage	U_B	max. 24 V DC -20 % / +25 %
Operating current	I_B	max. 4 A
Ambient conditions		
Ambient temperature		cable, fixed: -40 ... 80 °C (-40 ... 176 °F) cable, flexing: -25 ... 80 °C (-13 ... 176 °F)
Pollution degree		3
Mechanical specifications		
Contact elements		spring-loaded contact socket
Degree of protection		IP67 / IP68 / IP69k
Cable code		Li 9Y 11Y 3 x 0.34
Material		
Contacts		CuSn / Au
Contact surface		Au
Body		TPU, transparent
Cable		PUR
Slotted nut		Diecast zinc
Core insulation		PP
Cable		according to IEC/EN 60228 (DIN VDE 0295) class 6
Sheath diameter		Ø 4.3 mm
Bending radius		> 10 x cable diameter, moving > 5 x cable diameter, fixed
Color		black
Number of cores		3
Core cross-section		0.34 mm^2
Cores color		Core 1: brown Core 3: blue Core 4: black
Conductor construction		42 x 0.1 mm Ø
Length	L	as per specification
Drag chain suitability		
Drag chain cycles		≥ 5000000
Motion velocity		≤ 3.3 m/s
Traverse distance		5 m horizontal

Electrical connection

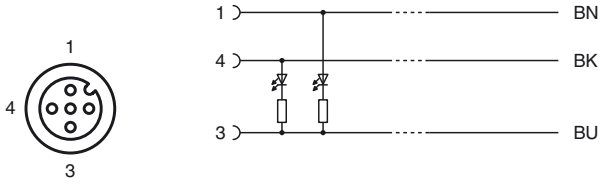

Release date: 2019-08-20 14:08 Date of issue: 2019-08-20 t191328_eng.xml

Acceleration	≤ 5 m/s²
Torsion cycles	≥ 1000000
Torsional stress	± 180 °/m
Flammability	
Contact carrier	HB
Housing	V-2
Cable	FT2
Compliance with standards and directives	
Standard conformity	
Degree of protection	EN 60529
Flammability	IEC 60332-1-2
Halogen-free	IEC 60754-1
Specification	connector M12 x 1 : IEC 61076-2-101
Approvals and certificates	
UL approval	AWM STYLE 20549 80 °C 300V AWM I A/B 80 °C 300V FT2 (cable)

Accessories

MH V1-SCREWDRIVER
torque screwdriver (0.6 Nm)

MH V1-BIT M12
plug-in cap M12

V1/V3-LABELHOLDER
Label holder

V1/V3-LABEL
Label plate

MH V1-Holder
Modular universal holder for M12 connectors

V1-MARKING-RING-BLUE
Marking ring for M12 plug

V1-MARKING-RING-GREEN
Marking ring for M12 plug

V1-MARKING-RING-ORANGE
Marking ring for M12 plug

V1-MARKING-RING-RED
Marking ring for M12 plug

V1-MARKING-RING-WHITE
Marking ring for M12 plug

V1-MARKING-RING-YELLOW
Marking ring for M12 plug

Release date: 2019-08-20 14:08 Date of issue: 2019-08-20 t191328_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".
Pepperl+Fuchs Group www.pepperl-fuchs.com
USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com
Germany: +49 621 776 1111 fa-info@de.pepperl-fuchs.com
Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com
PEPPERL+FUCHS