Proximity Sensors Capacitive Thermoplastic Polyester Types VC11RT, VC12RT, VC12RN



- **Capacitive level sensor for solid, fluid or granulated substances**
- **Adjustable sensing distance: 4-12 mm**
- **VC11/12RT: With adjustable time delay**
- **VC12RN: Without time delay**

Product Description

Capacitive sensor in thermoplastic polyester for mounting in PG 36 screw gland. Available with adjustable sensing distance and with/-without built-in time delay (ON or OFF delay). The relay output ensures that the load can be driven directly. Excellent for use in the agriculture area (detection of grains, fluids etc.).

Ordering Key

VC11RT12010M

Type
Time delay
Voltage
Time


Type Selection

Supply voltage	Ordering no. With ON delay	Ordering no. With OFF delay	Ordering no. Without time delay
120 VAC	**VC 11RT12010M**	**VC 12RT12010M**	**VC 12RN120**
230 VAC	**VC 11RT23010M**	**VC 12RT23010M**	**VC 12RN230**
24 VAC/DC	**VC 11RT92410M**	**VC 12RT92410M**	**VC 12RN924**


Specifications

Rated operational voltage	
120	120 VAC, 47-63 Hz
230	230 VAC, 47-63 Hz
924	24 VAC/DC, 47-63 Hz (VAC)
Consumption	Max. 1,5 W
Sensing distance	4-12 mm, adjustable
Hysteresis	1,5 mm at 7 mm sensing dist.
Operating frequency	1 Hz
Output	Relay SPDT, 2 A/240 VAC
Indication for output ON	LED, yellow
Time delay	
VC11/12RT	1 s - 10 m
Environment	
Degree of protection	IP 67
Operating temperature	-20° to +70°C (-4° to +158°F)
Storage temperature	-40° to +85°C (-40° to +185°F)
Housing material	Thermoplastic polyester
Cable	PVC, 2 m, 5 x 0.75 mm²
Approvals	CSA (only VC12RT)
CE-marking	Yes

Dimensions




VC11RT/VC12RT



VC12RN

Wiring Diagram



ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru
Sensoren

Mode of Operation

VC12RN (See operation diagram). Power supply is applied to the sensor (brown and blue cables). The relay operates (connection between black and yellow cables) and remains ON until the sensor is activated. After activation of the sensor the relay releases (connection between black and grey cables.)

VC12RT (See operation diagram). Power supply is applied to the sensor (brown and blue cables) and time measurement starts. When the set time has expired (0-10 min.) the relay operates (connection between black and yellow cable) and remains connected until the sensor is activated. After activation of the sensor the relay releases (connection between black and grey cable). As soon as the sensor is unactivated again the time measurements of the set time starts.


VC11RT (See operation diagram). Power supply is applied to the sensor (brown and blue cables). When sensor is not activated, the relay operates (connection between black and yellow cables) and LED lights. When sensor is activated the time measurement starts and LED flashes. After expiration of the set time (0-10 min.), the relay releases (connection between black and grey cables) and LED turns off. The relay remains released until sensor is activated again.

Adjustment




VC12RN **VC1.RT**

Operation Diagrams

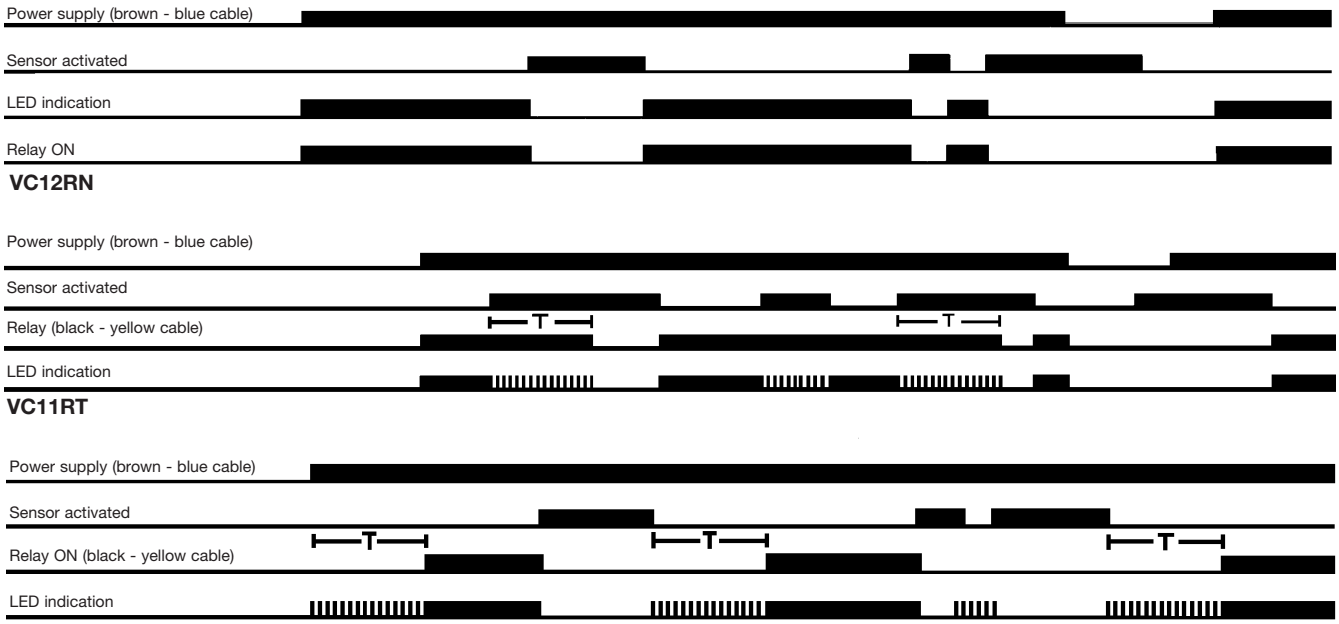

Installation Hint



For mounting VC 11/12 through wall of tank

Delivery Contents

- Capacitive switch: VC11/12
- Screwdriver
- **Packaging:** Plastic bag
- User manual

ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru
Sensoren