LVFSN1B20

FLOAT SWITCH FOR DIRTY WATER, NEOPRENE CABLE, 20MT LONG




Product designation			Float switches for dirty water
Product type designation			LVFSN1
Function			Emptying or filling
Counterweights			
Counterweight			Internal
Activation angle			15°
Relay outputs			
Number of relays		Nr.	1
Contact arrangement			1 changeover contact C/O-SPDT
Rated operational voltage AC (IEC)		VAC	250
Contact ratings			AC1 10A 250VAC AC15 4A 250VAC
Connections			
Maximum cable lenght		m / ft	20
Ambient conditions			
Temperature			
	Operating temperature		
	min	°C	0
	max	°C	+50
	Storage temperature		
	min	°C	-20
	max	°C	+80
Maximum operating pressure		bar	5
Maximum installation depth		m	50
Housing			
Cable material			Neoprene H07 RN-F3X1
Float casing material			Polypropylene
IEC degree of protection			IP68
Weight		g	3060
Dimensions			

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

LVFSN1B20

FLOAT SWITCH FOR DIRTY WATER, NEOPRENE CABLE, 20MT LONG

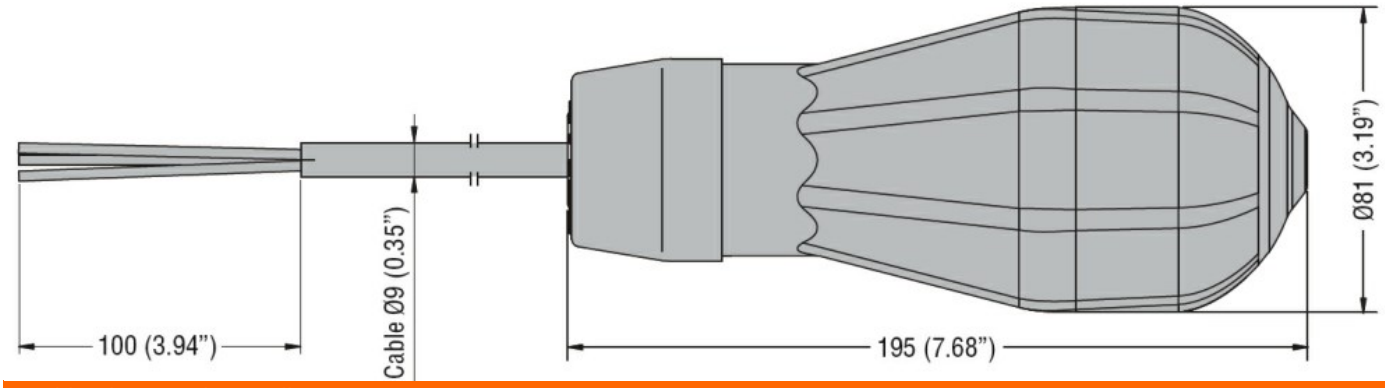

Certifications and compliance

Compliance	
	IEC/EN 60730-1
	IEC/EN 60730-2-15
Certificates	
	TÜV-SUD

ETIM classification

ETIM 8.0	EC001447 - (Fill) level monitoring relay

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding