
CONTRINEX

INDUCTIVE SENSOR
WELD-IMMUNE
DW-Ax-70x-R81-6xx

HOUSING	OPERATING DISTANCE	MOUNTING
17 x 8 (R81)	2 mm	Embeddable

- ✓ Anti-spatter coating
- ✓ Magnetic-field immunity: medium frequency ≤ 15 kA 50 Hz fields ≤ 40 mT
- ✓ Robust full-metal sensor, impact resistant
- ✓ Long operating distance
- ✓ Factor 1 on Fe and Al



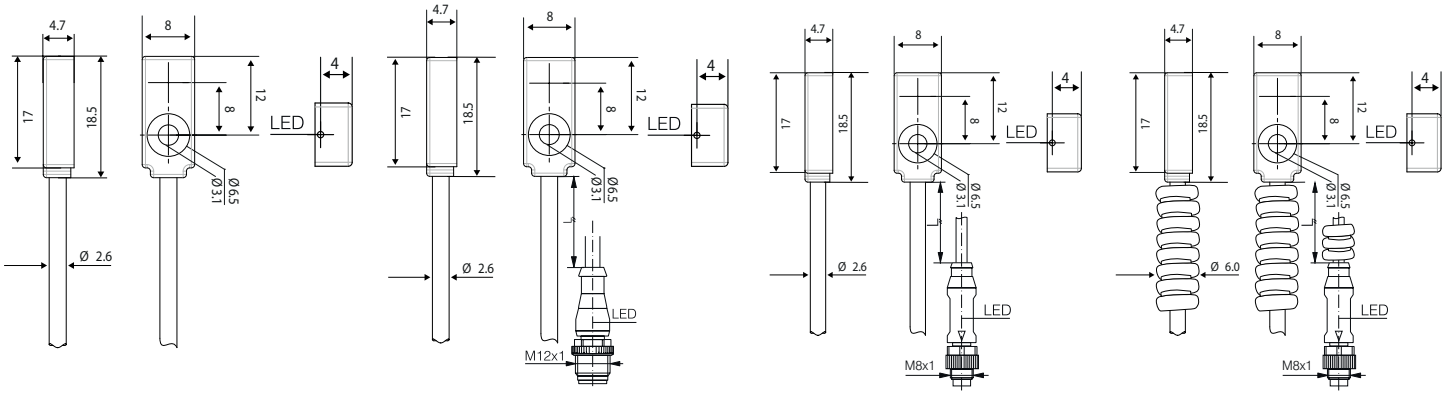

Cable
DW-AD-70x-R81-693

M12 Pigtail
DW-AV-70x-R81-693

M8 Pigtail
DW-AV-70x-R81-697

M8 Pigtail
DW-AP-70x-R81-69X

DETECTION DATA		INTERFACE	
Rated operating distance (S_n)	2 mm	Indicator LED, yellow	Sensing state ($0 \le s \le S_r$)
Assured operating distance (S_a)	≤ (0.81 x S_n) mm	IO-Link	✓
Repeat accuracy	0.1 mm	MTTF (@40°C)	1017 years
Hysteresis	3% S_r ≤ Hyst ≤ 15% S_r		
Temperature drift	≤ 10% S_r		
Standard target	8 x 8 x 1 mm³, FE360		

Note: $0.9S_n \le S_r \le 1.1S_n$.

ELECTRICAL DATA		MECHANICAL DATA	
Supply voltage range (U_B)	10...30 VDC	Mounting	Embeddable
Residual ripple	≤ 20% U_B	Housing material	V4A / 1.4435 / AISI 316 (+ coating)
Output current	≤ 100 mA	Sensing face material	V4A / 1.4435 / AISI 316 (+ coating)
Output voltage drop	≤ 2.0 VDC	Max tightening torque	0.8 Nm with M3 screws
Power consumption (no-load)	≤ 10 mA	Ambient operating temperature	-25...+85°C[1]
Residual current	≤ 0.1 mA	Enclosure rating	IP67
Switching frequency	≤ 15 Hz	Weight (cable/connector)	see page 2
Short-circuit protection	✓	Shock and vibration	IEC 60947-5-2
Voltage reversal protection	✓		
Cable length max.	≤ 300 m		

Note: all data measured according to IEC 60947-5-2 standard with U_B=20…30VDC, T_A=23°C ± 5°C.

CONTRINEX AG Industrial Electronics

Route du Pâquis 3 – P.O. Box – CH 1720 Corminboeuf – Switzerland – **Tel:** +41 26 460 46 46
Fax: +41 26 460 46 40 – **Internet:** www.contrinex.com – **E-mail:** info@contrinex.com

CORRECTION FACTORS FOR TARGET OF


Steel FE 360	**1**	Copper	**1**	Aluminum	**1**	Brass	**1.35**	Stainless Steel V2A 1/2 mm	**0.4/0.75**

CORRECTION FACTORS FOR EMBEDDABLE MOUNTING IN SUPPORT OF

Steel FE 360	**0.9**	Aluminum	**0.8**	Brass	**0.8**	Stainless Steel V2A	**0.9**

Note: the operating distance of the sensor must be multiplied by the correction factor of the material. For example, the operating distance on Aluminum is $S_{n,Al} = S_n \times CF_{Al}$. In case of embeddable mounting, the distance is multiplied by the additional correction factor of the support, thus $S_{n,Al} = S_n \times CF_{Al} \times CF_{emb,Al}$.

INSTALLATION CONDITIONS

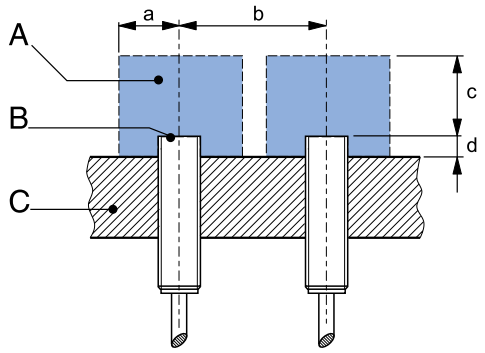

A : metal free zone
B : sensing face
C : support

a : 4 mm
b : 35 mm
c : 6 mm
d : steel 0 mm

Note: additional installation information can be found in the glossary of the Contrinex General Catalog.

IO-LINK FUNCTIONALITIES

IO-Link version	1.1
SIO mode	Supported
Process data	7-bit input
Baudrate	COM2 (38.4 kBaud)
Minimum cycle time	10.4 ms
ISDU	Not supported


IODD files may be downloaded from

www.contrinex.com/product-range/inductive-sensors/.


Select the product name to display the product page with corresponding downloads.

Alternatively, just click/scan the QR code on the left.

WIRING DIAGRAM



PIN ASSIGNMENT



AVAILABLE TYPES

COATED

Part number	Part reference	Polarity	Connection	Output on pin 2	Output on pin 4 / bk	Weight
330-320-245	DW-AV-703-R81-693	PNP	PUR, 0.5 m + M12 3-pin	-	Normally open (NO) / IO-Link	20 g
330-320-246	DW-AV-703-R81-697	PNP	PUR, 0.5 m + M8 3-pin	-	Normally open (NO) / IO-Link	20 g
330-320-247	DW-AD-703-R81-693	PNP	PUR, 2 m, 3 wire	-	Normally open (NO) / IO-Link	20 g
320-420-851	DW-AV-701-R81-693	NPN	PUR, 0.5 m + M12 3-pin	-	Normally open (NO)	20 g
330-420-852	DW-AV-701-R81-697	NPN	PUR, 0.5 m + M8 3-pin	-	Normally open (NO)	20 g
330-420-853	DW-AD-701-R81-693	NPN	PUR, 2 m, 3 wire	-	Normally open (NO)	20 g
330-320-253	DW-AP-703-R81-693	PNP	PUR+PTFE, 0.5 m + M12 3-pin	-	Normally open (NO) / IO-Link	30 g
330-320-254	DW-AP-703-R81-697	PNP	PUR+PTFE, 0.5 m + M8 3-pin	-	Normally open (NO) / IO-Link	30 g
330-420-859	DW-AP-701-R81-693	NPN	PUR+PTFE, 0.5 m + M12 3-pin	-	Normally open (NO)	30 g
330-420-860	DW-AP-701-R81-697	NPN	PUR+PTFE, 0.5 m + M8 3-pin	-	Normally open (NO)	30 g

Note 1: AV and AP versions with bright Green LED integrated in connector

Note: part reference may include additional suffix to indicate a revision version or special version. Further information is available on request.

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines. Terms of delivery and rights to change design reserved.

CONTRINEX AG Industrial Electronics

Route du Pâqui 3 – P.O. Box – CH 1720 Corminboeuf – Switzerland – **Tel:** +41 26 460 46 46
Fax: +41 26 460 46 40 – **Internet:** www.contrinex.com – **E-mail:** info@contrinex.com