# LVFSN1B15

FLOAT SWITCH FOR DIRTY WATER, NEOPRENE CABLE, 15MT LONG




| | | | |
|---|---|---|---|
| Product designation | | | Float switches for dirty water |
| Product type designation | | | LVFSN1 |
| Function | | | Emptying or filling |
| **Counterweights** | | | |
| Counterweight | | | Internal |
| Activation angle | | | 15° |
| **Relay outputs** | | | |
| Number of relays | | Nr. | 1 |
| Contact arrangement | | | 1 changeover contact C/O-SPDT |
| Rated operational voltage AC (IEC) | | VAC | 250 |
| Contact ratings | | | AC1 10A 250VAC AC15 4A 250VAC |
| **Connections** | | | |
| Maximum cable lenght | | m / ft | 15 |
| **Ambient conditions** | | | |
| Temperature | | | |
| | Operating temperature | | |
| | min | °C | 0 |
| | max | °C | +50 |
| | Storage temperature | | |
| | min | °C | -20 |
| | max | °C | +80 |
| Maximum operating pressure | | bar | 5 |
| Maximum installation depth | | m | 50 |
| **Housing** | | | |
| Cable material | | | Neoprene H07 RN-F3X1 |
| Float casing material | | | Polypropylene |
| IEC degree of protection | | | IP68 |
| Weight | | g | 2460 |
| **Dimensions** | | | |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

# LVFSN1B15

FLOAT SWITCH FOR DIRTY WATER, NEOPRENE CABLE, 15MT LONG

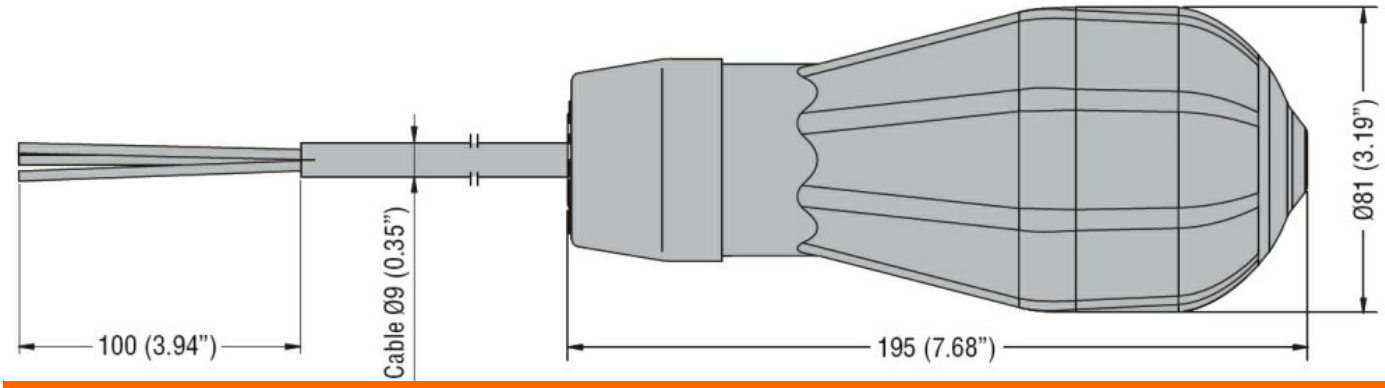


## Certifications and compliance

| | |
|---|---|
| Compliance | |
| | IEC/EN 60730-1 |
| | IEC/EN 60730-2-15 |
| Certificates | |
| | TÜV-SUD |

## ETIM classification

| | |
|---|---|
| ETIM 8.0 | EC001447 - (Fill) level monitoring relay |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding