
IKT 8

Inductive sensor 8 x 8 / cubic housing

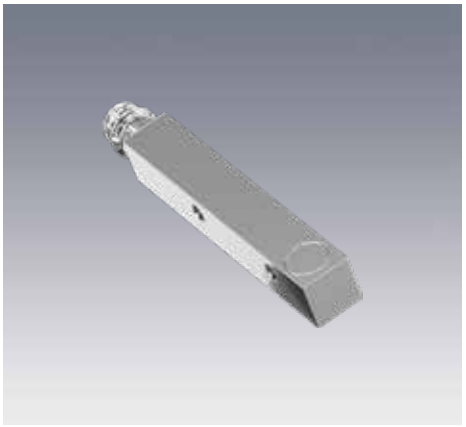

PRODUCT-HIGHLIGHTS

- Various parameterization options
- IO-Link 1.1
- Increased switching distance*

Sensor data	
Rated operating distance S_n	3 mm[1] / 2 mm[2]
Ensured operating distance S_a	≤ 2.43 mm[1] / ≤ 1.62 mm[2]
Hysteresis	3 % Sr ≤ Hyst ≤ 15 % Sr[3/1] / ≤ 20 % S_r typ.[3/2]
Repeatability	≤ 0.15 mm[1] / ≤ 0.04 mm[2]
Temperature drift	≤ 10 % S_r
Correction factor steel FE 360	1
Correction factor V2A 1 / 2 mm	0.84[1] / 0.8[2]
Correction factor CuZn	0.54[1] / 0.6[2]
Correction factor Al	0.44[1] / 0.5[2]
Correction factor Cu	0.39[1] / 0.45[2]

Functions	
Indicator LED yellow	Switching output indicator
Adjustment possibilities	N.O. / N.C. Wide variety of adjustment possibilities via IO-Link
Default settings	N.O.

Electrical data	
Operating voltage, $+U_B$	10 … 30 V DC
Residual ripple	≤ 20 % U_B
No-load current, I_0	≤ 10 mA
Output current, Ie	≤ 200 mA
Protective circuits	Induction protection / reverse-polarity protection, U_B / short-circuit protection (Q)
Residual current	≤ 0.1 mA
Voltage drop, U_D	≤ 2.0 V DC at 100 mA
Switching output, Q	PNP
Output function	N.O./N.C.[4]
Power-on delay	≤ 50 ms[1] / ≤ 60 ms[2]
Switching frequency f (ti/tp 1:1)	≤ 1 kHz[1] / ≤ 5 kHz[2]

Mechanical data	
Dimensions	8 mm x 8 mm x 59 mm
Mounting	Quasi-flush / flush (see selection table)
Enclosure rating	IP 67[5]
Material housing	Brass, chrome-plated[1] / Zamac[2]
Material active surface	PBTP[1] / PBTP Crastin[2]
Type of connection	Metal plug, M8x1, 3-pin
Ambient temperature: operation	-25 … +70 °C
Ambient temperature: storage	-25 … +70 °C
Weight	14 g[1] / 12 g[2]
Vibration and impact resistance	EN IEC 60947-5-2
Tightening torque	-
Standard target FE 360	9 mm x 9 mm x 1 mm[1] / 8 mm x 8 mm x 1 mm[2]

IO-Link	
Communication mode	COM 2
Min. cycletime	10.4 ms
SIO mode	Compatible
Length process data	7 Bit[1] / 2 Bit[2]
Specification	1.1
ISDU	Not compatible


[1] Quasi-flush devices [2] Flush devices [3] S_r (Effective switching distance) = ± 10 % of S_n [4] Adjustable / parameterisable via IO-Link [5] With connected IP 67 plug

All data measured according to standard EN IEC 60947-5-2 with U_B = 20 ... 30 V DC, T_A = 23 °C ± 5 °C
The switching distance of the sensor must be multiplied by the correction factor of the material. The switching distance on aluminium is thus $S_{n\,AL} = S_n \times CF_{AL}$.
For flush mounting the distance is multiplied by the additional correction factor of the backing material, S_n Al= $S_n \times CF_{AL} \times CF_{\text{mounting material}}$

Switching distance	Mounting	Switching output	Type of connection	Part number	Article number
3 mm*	Quasi-flush	PNP	Metal plug, M8x1, 3-pin, IO-Link	IKT 8-S-QB3-PSL-M3M	996-01040
2 mm	Flush	PNP	Metal plug, M8x1, 3-pin, IO-Link	IKT 8-S-B2-PSL-M3M	996-01041


Plug connection[1]

153-13627

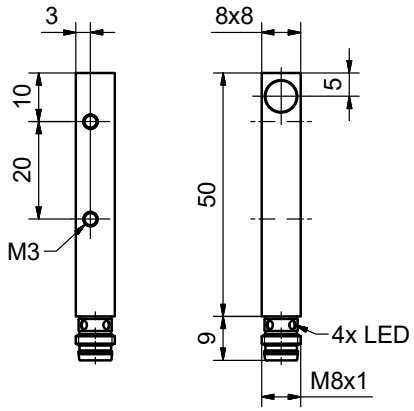


Plug connection[2]

153-13628

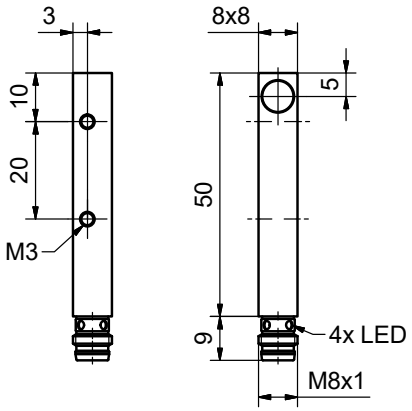


Connection, 3-pin, IO-Link

154-00583



Mounting

155-03390

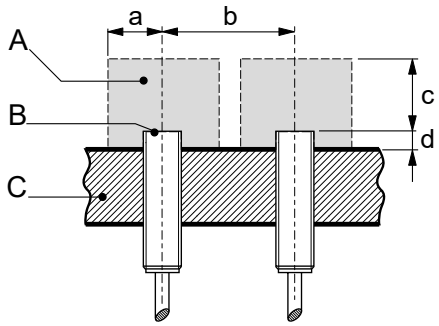

A: Metal-free zone	a: 6 mm[1] / 8 mm[2]
B: Active surface	b: 16 mm[1] / 16 mm[2]
C: Backing material	c: 9 mm[1] / 6 mm[2]
	d: 1 mm[1] / -[2]

11