P2L131311

ROPE-PULL LEVER LIMIT SWITCH FOR EMERGENCY STOPPING, ISO 13850 COMPLIANT, WITH RESET BUTTON. CONTACTS 1NO+1NC. 40N OPERATING FORCE



Product designation			Rope-pull lever with reset buttom
Product type designation			P2L131311
General characteristics			
Material			
	Housing		Aluminium-zinc alloy
Contact characteristics			
Type of contact			1NO+1NC
Thermal current Ith		A	6
Rated insulation voltage Ui		V	250
Short-circuit protection with fuse		Class/A	10 gG/SC QUICK FUSE
IEC Conventional free air thermal current Ith		A	6
Resistance per pole (average value)		mΩ	<10
Mechanical features			
Operating head fixing			Fixed
Operating torque			
		N	40
		lb	9
Tightening torque (Max)			
	Switch fixing		
		Nm	2.5
		lbin	22.1
	Contact terminals		
		Nm	0.8
		lbin	7
	Body lid screw fixing		
		Nm	0.8
		lbin	7
Conductor section			
	AWG/Kcmil		
	max		14
	IEC		
	min	mm²	1 or 2
	max	mm²	2.5
Cable connection			Self-releasing screw terminal
Cable entry			PG11 with cable gland
Weight		g	459
Operations			
Mechanical life		cycles	100000
Mechanical operation		cycles/h	1800
Ambient conditions			
Temperature			

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

P2L131311


ROPE-PULL LEVER LIMIT SWITCH FOR EMERGENCY STOPPING, ISO 13850 COMPLIANT, WITH RESET BUTTON. CONTACTS 1NO+1NC. 40N OPERATING FORCE

Operating temperature			
	min	°C	-25
	max	°C	+70
Storage temperature			
	min	°C	-40
	max	°C	+70

Resistance & Protection

IP degree		
	Body housing	IP65
Pollution degree		3

Dimensions

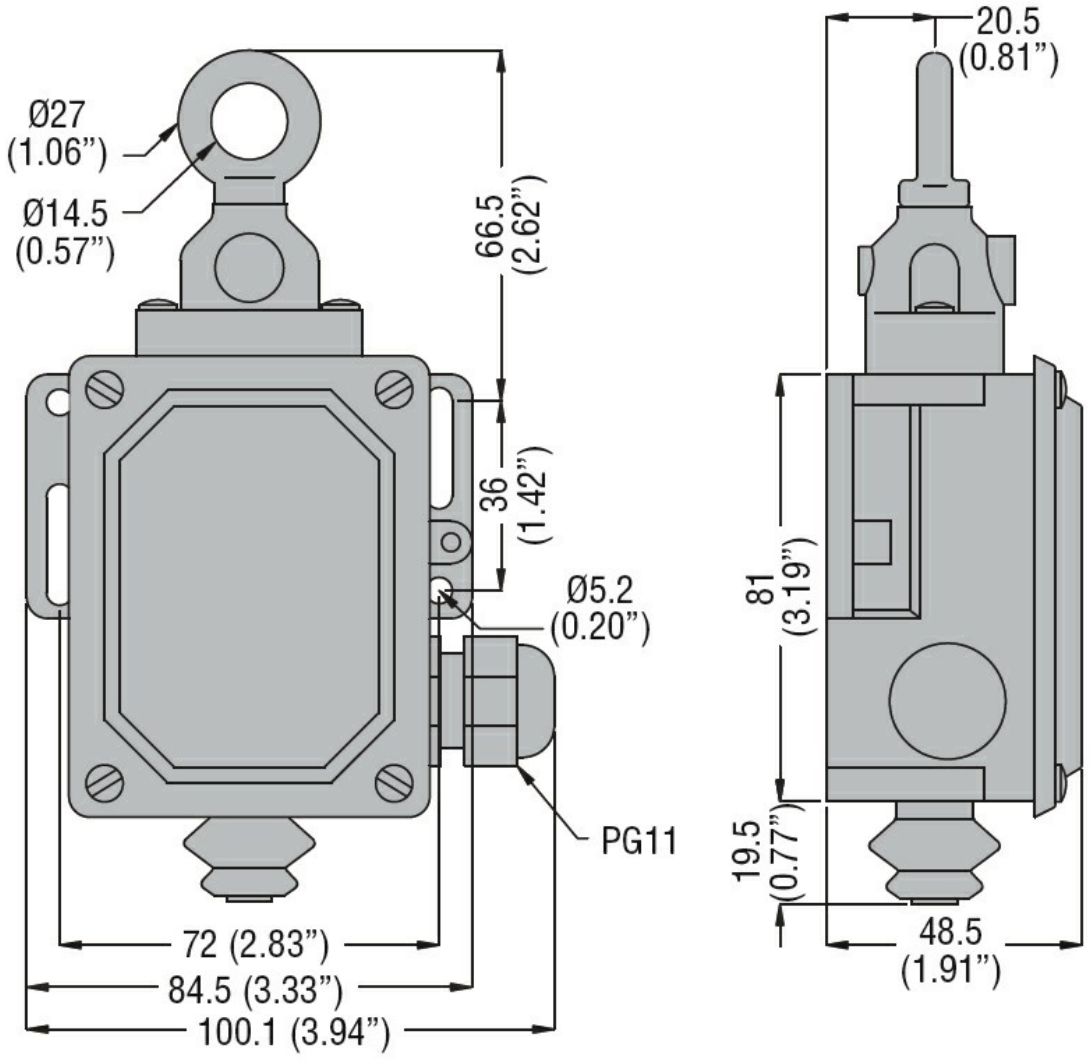


Wiring diagrams

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

P2L131311

ROPE-PULL LEVER LIMIT SWITCH FOR EMERGENCY STOPPING, ISO 13850 COMPLIANT, WITH RESET BUTTON. CONTACTS 1NO+1NC. 40N OPERATING FORCE

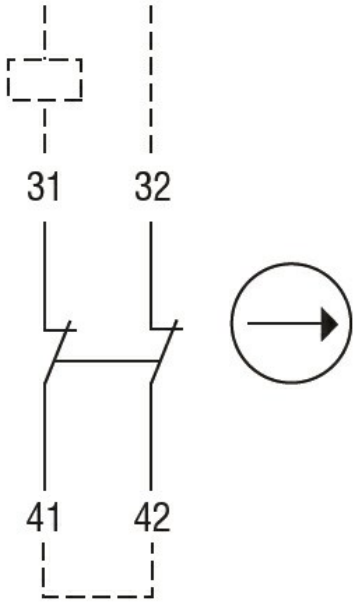

Certifications and compliance

Compliance

/

Certificates

EAC

ETIM classification

ETIM 8.0

EC000030 - End switch

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding