# ADXNF006

SOFT STARTER, ADXNF... TYPE, NFC VERSION, WITH INTEGRATED BYPASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 6A



| | | | | |
|---|---|---|---|---|
| Product designation | | | | Soft starter NFC |
| Product type designation | | | | ADXNF |
| Motor type | | | | Asynchronous three phase |
| **Electrical features** | | | | |
| Supplies voltage | | | | |
| | | Type of system | | Three phase |
| | | Rated supply voltage | V | 208…600VAC |
| | | auxiliary supply voltage (Us) | | 100…240VAC |
| | | Rated frequency | Hz | 50/60 |
| Rated starter current Ie | | | A | 6 |
| Rated motor power | | | | |
| | IEC ratings (T≤40°C) | | | |
| | | 230VAC | kW | 1.1 |
| | | 400VAC | kW | 2.2 |
| | | 500VAC | KW | 3 |
| | UL ratings (T≤40°C) | | | |
| | | 220-240VAC | HP | 1.5 |
| | | 380-415VAC | HP | 2 |
| | | 440-480VAC | HP | 3 |
| | | 550-600VAC | HP | 5 |
| Number of controlled phases | | | Nr. | 2 |
| Built-in bypass | | | | Yes |
| Cooling System | | | | Natural or forced (optional) |
| Rated insulation voltage Ui | | | V | 600 |
| **Programming interface** | | | | |
| Display | | | | No |
| Programming with NFC technology | | | | Yes |
| Optical port | | | | No |
| **Startup and stop settings** | | | | |
| Startup method | | | | Voltage ramp |
| Stop method | | | | Voltage ramp or free-wheel stop |
| Acceleration ramp | | | s | 1-20 |
| Deceleration ramp | | | s | 0-20 |
| Startup voltage | | | % | 30-80 |
| **Protections** | | | | |
| Power supply Protection | | | | No power line, phase loss, frequency out of limits, minimum and maximum voltage and phase sequence |
| Starter protection | | | | Overtemperature |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

# ADXNF006

SOFT STARTER, ADXNF... TYPE, NFC VERSION, WITH INTEGRATED BYPASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 6A

| Functions | |
|---|---|
| Built-in bypass | Yes |
| Built-in display and keypad | Yes |
| Languages | No |
| View measurements | No |
| Torque control | No |
| Adjustable current limit | No |
| Dynamic braking | No |
| Kick Start function | No |
| Motor overload electronic protection | No |
| Motor protection PTC input | No |
| Protection against phase loss | No |
| Protection against phase inversion | Yes |
| Protection against locked rotor | Yes |
| Protection against thyristor overtemperature | No |
| Protection against low load | Yes |
| Programmable alarm | No |
| Digital inputs | 1 |
| Analog inputs | 0 |
| Digital outputs | 2 |
| Analog output | 0 |
| Monitoring communication | No |
| Optical port for programming | No |
| Event log | No |
| Motor hour counter | No |
| Startup counter | No |
| Clock calendar | No |
| Remote external keypad | No |

## Input and Output

Digital inputs

| | | |
|---|---|---|
| Number of digital input | Nr. | 1 |
| Digital input type | | Volt-free contact |
| Digital input functions | | Motor start |

Digital outputs

| | | |
|---|---|---|
| Number of digital output | Nr. | 2 |
| Digital output arrangement | | 2 NO contacts with the same common, 5A 250VAC AC1 - 5A 30 VDC |
| Digital output functions | | Programmable: line contactor (Run), TOR (Top Of Ramp), alarm |

## Communication interfaces

| | |
|---|---|
| Communication interface | NFC |

## Ambient conditions

Temperature

Operating temperature

| | | |
|---|---|---|
| min | °C | -20 |
| max | °C | +60°C (with current derating >40°C) |

Storage temperature


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

# ADXNF006


SOFT STARTER, ADXNF... TYPE, NFC VERSION, WITH INTEGRATED BYPASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 6A

| | | | |
|---|---|---|---|
| | min | °C | -30 |
| | max | °C | +80 |
| Max altitude | | m | 1000 without derating of the starter current |
| Relative humidity | | % | <80% |
| Pollution degree | | | 2 |
| Installation category | | | III |

## Housing

| | | | |
|---|---|---|---|
| Mounting | | | Screw-fixing or 35mm DIN rail (IEC/EN/BS 60715) |
| IP degree of protection | | | IP20 |
| Dimensions (W x H x D) | | mm | 45 x 139 x 113.4 |
| Weight | | Kg | 0.45 |

## Dimensions

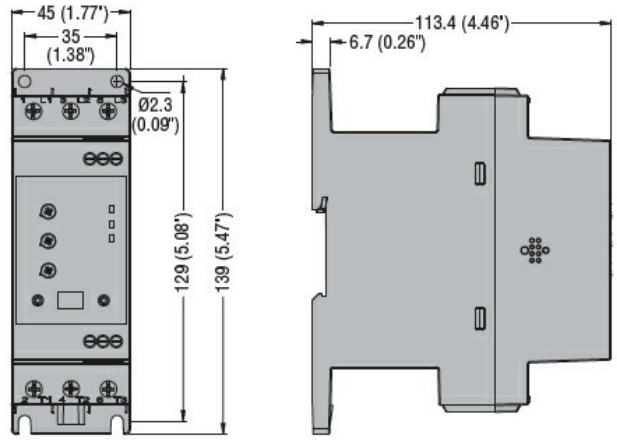


## Certifications and compliance

Compliance

| |
|---|
| CSA C22.2 n° 60947-4-2 |
| IEC/EN/BS 60947-1 |
| IEC/EN/BS 60947-4-2 |
| UL 60947-4-2 |

Certificates

| |
|---|
| cULus |
| EAC |
| RCM (pending) |

## ETIM classification

| | |
|---|---|
| ETIM 8.0 | EC000640 - Soft starter |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding