SMR 9520-IO TS 0.1-J5

Thru Beam

Photoelectric Sensors

Compatible Transmitter:
SMT 9020C-IO TS 0.1-J5



Product Data	
Function	Receiver
Operation Mode	Thru Beam
Supply Voltage	10 - 30 V dc
Connection	0.1 m cable with 5 pin, M12
Sensing Range	20 m
Output	PNP (IO-Link)
Output Status	N.C./N.O.
Housing Material	Stainless Steel
Housing	M18 x 1
Features	IO-Link communication port

Technical Data	
Supply Voltage	10 - 30 V dc
Voltage Ripple	15 %
Reverse Polarity Protected	Yes
Short Circuit Protected	Yes
Current Consumption	40 mA
Max. Output Load	100 mA
Max. Residual Voltage	2,5 V
Max. Operation Frequency	20 Hz
Response Time ton / toff	25 ms / 25 ms
Output Indicator	Yellow LED
Hysteresis	Approx. 20 %
Opening Angle	+/- 7°
Housing Material, Front Lens	Polycarbonate
Housing Material, Sensor Housing	Stainless Steel (AISI 316 / 1.4401)
Cable	5 x 0,14 mm²
Cable Sleeve	PVC Ø 4,9 mm


COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

Channel Nº	Selectable 4 channels selectable via IO-Link

Environmental Data	
Vibration	10 - 55 Hz, 0,5 mm
Shock	30 g
Operation Temperature	-20 to +60 °C
Storage Temperature	-40 to +80 °C
Sealing Class	IP 69K
Light Immunity 5˚	> 10 000 lux
Light Immunity 20˚	> 100 000 lux

Approvals


Wiring Diagram

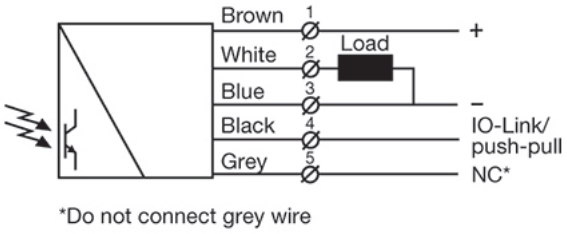

*Do not connect grey wire


Connections

5 pin, M12

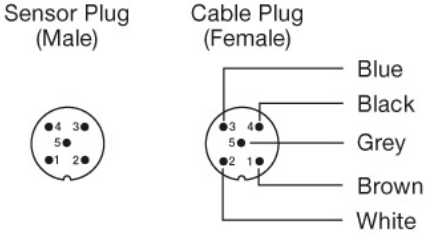


COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

Parallel Displacement

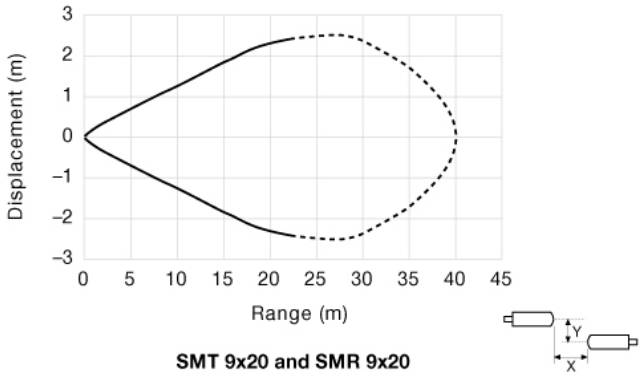


SMT 9x20 and SMR 9x20

Angular Displacement

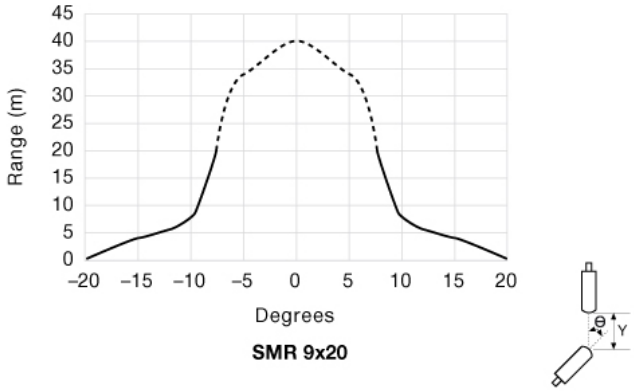


SMR 9x20

Dimensions

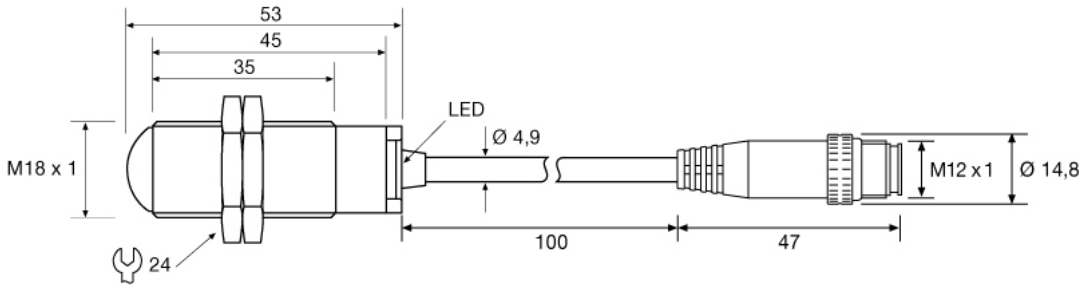

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

Excess Gain

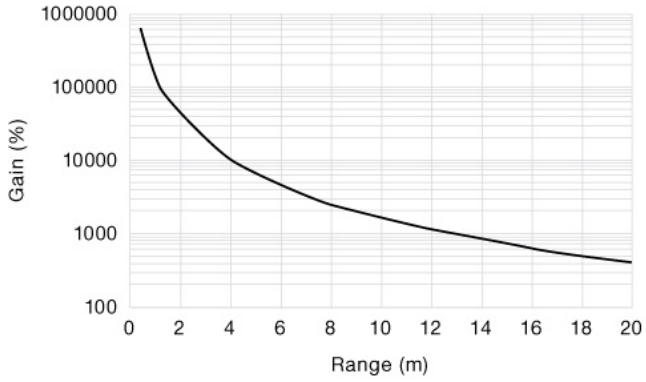

SMT 9020 and SMR 9x2x

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.