SMT 6000 AS T4

Thru Beam

Photoelectric Sensors



Compatible Receivers:

SMR 6406 AS T4
SMR 6506 AS T4
SMR 6402 AS T4
SMR 6502 AS T4

Product Data	
Function	Transmitter
Operation Mode	Thru Beam
Supply Voltage	10 - 32 V dc
Control Feature	Adjustable range and test input
Connection	4 pin, M8 plug
Sensing Range	6 m
Light Source	Infrared (880 nm)
Housing Material	Stainless Steel
Housing	Ø10

Technical Data	
Supply Voltage	10 - 32 V dc
Voltage Ripple	15 %
Reverse Polarity Protected	Yes
Current Consumption	Max. 320 mW
Test Input	Yes
Control Input	Adjustable range
Power On Indicator	Green LED
Light Source	Infrared (880 nm)
Emission Angle	+/- 10°
Housing Material, Front Lens	Polycarbonate
Housing Material, Sensor Housing	Stainless Steel (AISI 316 / 1.4401)
Cable	3 x 0,14 mm²
Cable Sleeve	PVC Ø 4,0 mm


Environmental Data	
Vibration	10 - 55 Hz, 0.5 mm
Shock	30 g

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

Operation Temperature	-20 to +60 °C
Storage Temperature	-40 to +80 °C
Sealing Class	IP 67


Approvals

Wiring Diagram

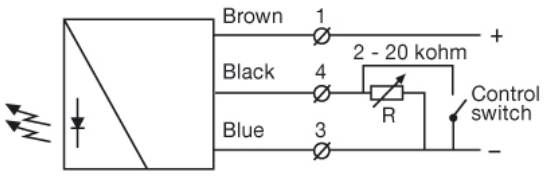


Connections

4 pin, M8

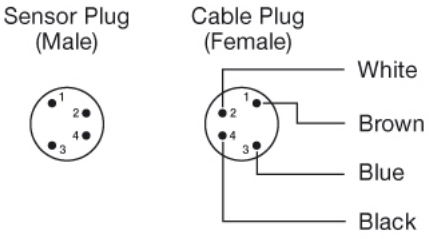


COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

Parallel Displacement

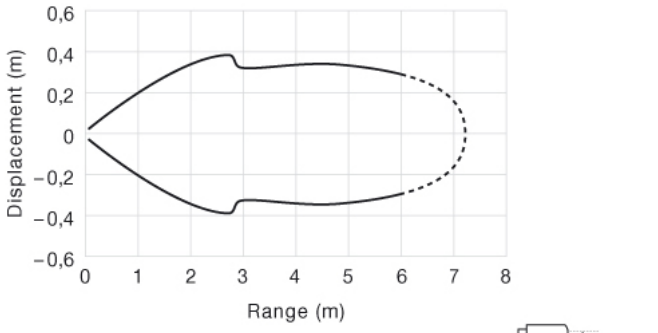


SMT 6000 and SMR 6x06

Angular Displacement

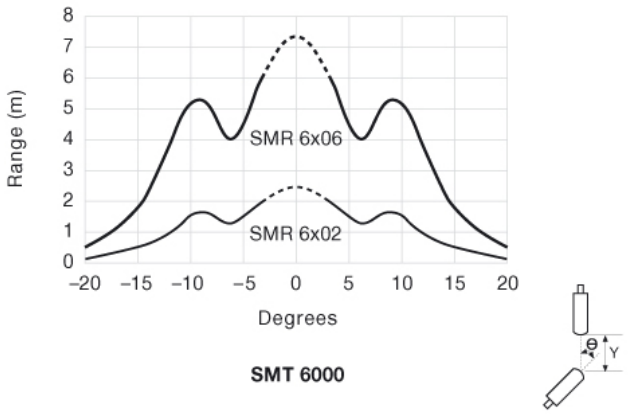

SMT 6000

Dimensions

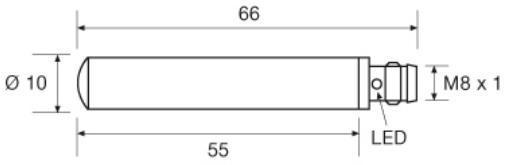

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.