SGT 14-200-040-A1-A-01-5

Self-Contained Light Curtains

Light Curtains



Compatible Receivers:

SGR 14-200-040-A1-A-08-5
SGR 14-200-040-A1-A-09-5

Product Data	
Function	Transmitter
Operation Mode	Thru Beam
Supply Voltage	12 - 36 V dc
Connection	5 m cable
Sensing Range	10 m
Number of Channels	40
Length	2000 mm
Active Height	1800 mm
Housing	10 x 28 mm


Technical Data	
Supply Voltage	12 – 36 V dc
Reverse Polarity Protected	Yes
Current Consumption	70 mA
Spacing between bottom & Ch1	25 mm
Channel Spacing	46 mm
Test Input	Yes
Power On Indicator	Green LED
Min. / Max. Sequencial Blanking Speed	1,6 m/s / 0,05 m/s
Light Source	Infrared (880 nm)
Profile Dimensions (w x d)	Slim Line (A), 10 x 28 mm
Housing Material, Front Lens	Polycarbonate
Housing Material, Profile	Aluminium (black anodised)
Cable	3 x 0,20 mm²
Cable Sleeve	PVC Ø 4,9 mm

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.


Environmental Data	
Operation Temperature	–20 to +65 °C
Storage Temperature	–40 to +80 °C
Sealing Class	IP 54
Light Immunity 5˚	> 100 000 lux

Approvals

Wiring Diagram

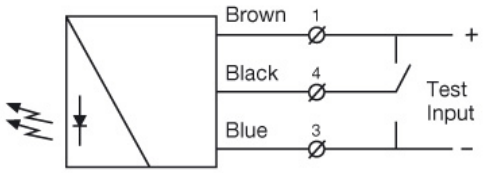


Parallel Displacement

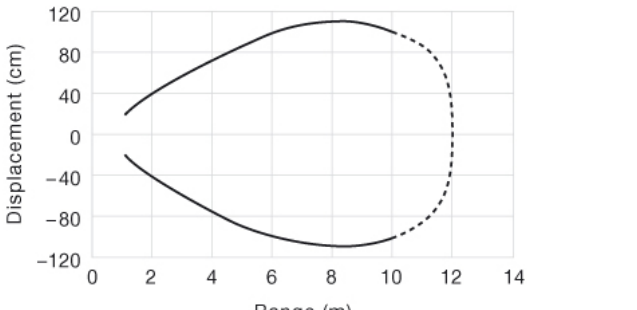

Slim Line A and Water-Resistant Slim Line C

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

Beam Patterns

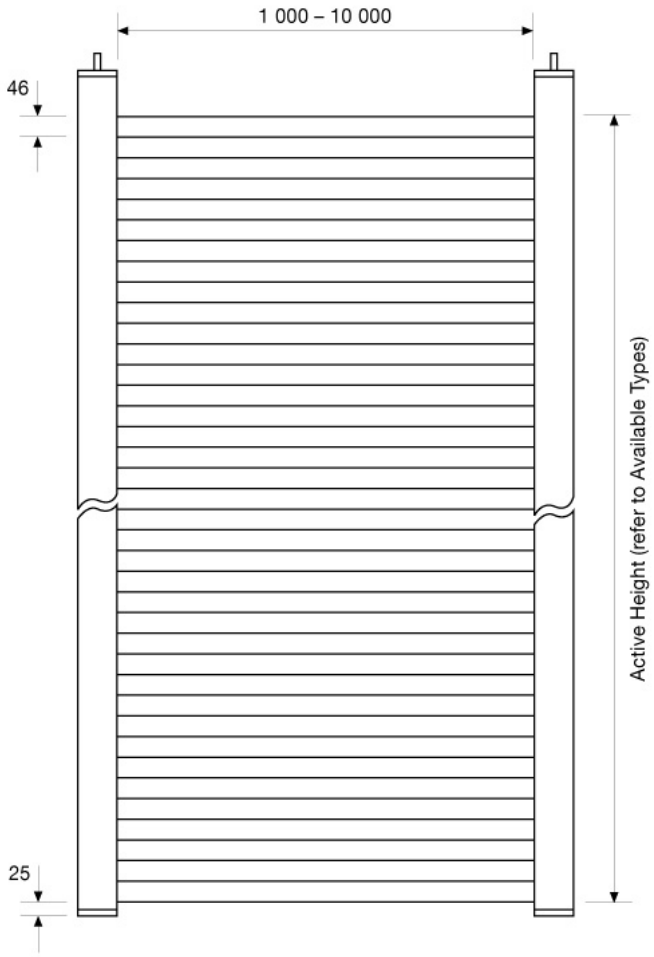


46 mm channel spacing

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

Dimensions

Details

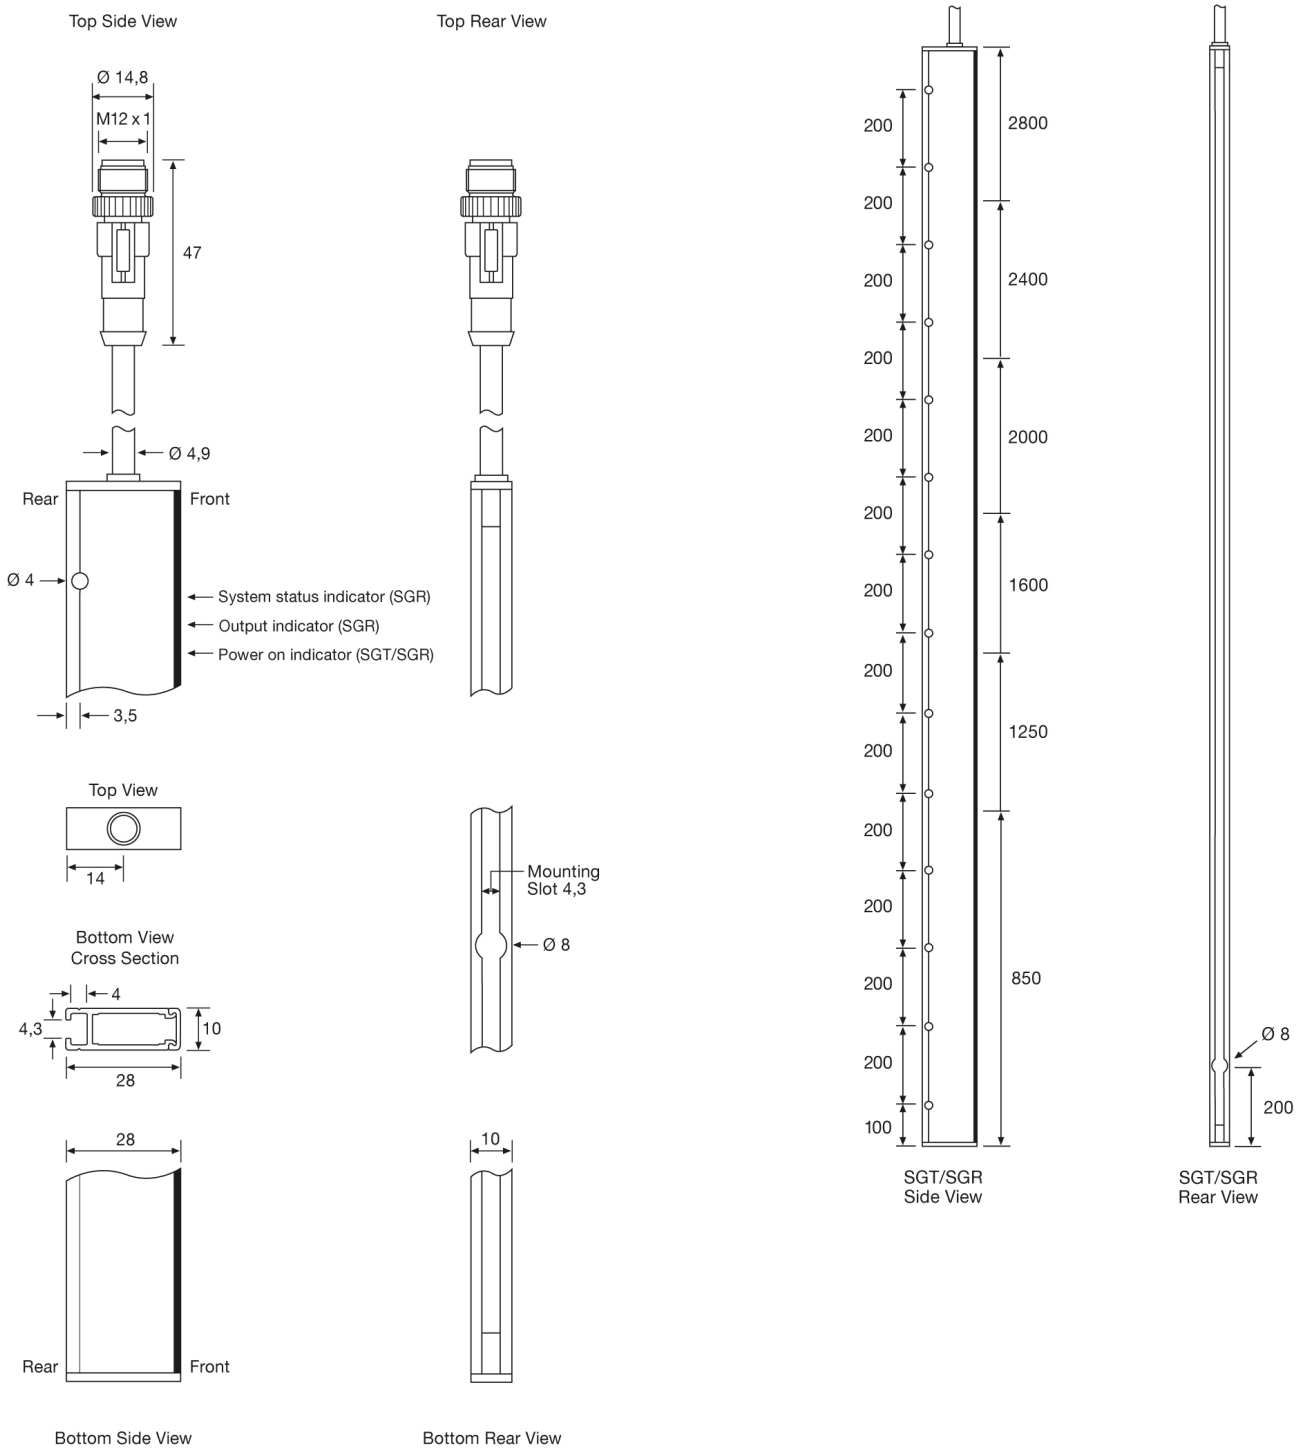

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.