KBF4L20

LIMIT SWITCH, K SERIES, ADJUSTABLE ROLLER LEVER, 1 BOTTOM CABLE ENTRY. DIMENSIONS TO EN 50047, PLASTIC BODY, CONTACTS 2NO SLOW ACTION. RUBBER ROLLER WITH OFFSET ALIGNMENT




Product designation			Adjustable roller lever
Product type designation			KBF
General characteristics			
Material			
	Housing		Polymer thermoplastic
	Roller		Rubber
Contact characteristics			
Type of contact			2NO Slow action
Thermal current Ith		A	10
IEC/EN 60947-5-1 designation			A600 Q600
Rated insulation voltage Ui		V	690
Rated impulse withstand voltage Uimp		kV	6
Insulation class			II
Short-circuit protection with fuse		Class/A	10 gG/SC QUICK FUSE
Switching speed			
	min	m/s	0.5
	max	m/s	1.5
IEC Conventional free air thermal current Ith		A	10
Resistance per pole (average value)		mΩ	<10
Mechanical features			
Operating head fixing			Locking bayonet insert
Operating torque			
		Ncm	3
		ozin	4.25
Tightening torque (Max)			
Switch fixing			
		Nm	2.5
		lbin	22.1
Contact terminals			
		Nm	0.8
		lbin	7
Body lid screw fixing			
		Nm	0.8
		lbin	7
Conductor section			
AWG/Kcmil			
	min		16
	max		14
IEC			
	min	mm²	1or 2
	max	mm²	2.5

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

KBF4L20


LIMIT SWITCH, K SERIES, ADJUSTABLE ROLLER LEVER, 1 BOTTOM CABLE ENTRY. DIMENSIONS TO EN 50047, PLASTIC BODY, CONTACTS 2NO SLOW ACTION. RUBBER ROLLER WITH OFFSET ALIGNMENT

Cable connection				Self-releasing screw terminal
Cable entry				M20 on the bottom
Operations				
Mechanical life			cycles	<10000000
Mechanical operation			cycles/h	3600
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+70
	Storage temperature			
		min	°C	-40
		max	°C	+70
Resistance & Protection				
IP degree				
		Terminals		IP20
		Body housing		IP65
Pollution degree				3
Dimensions				

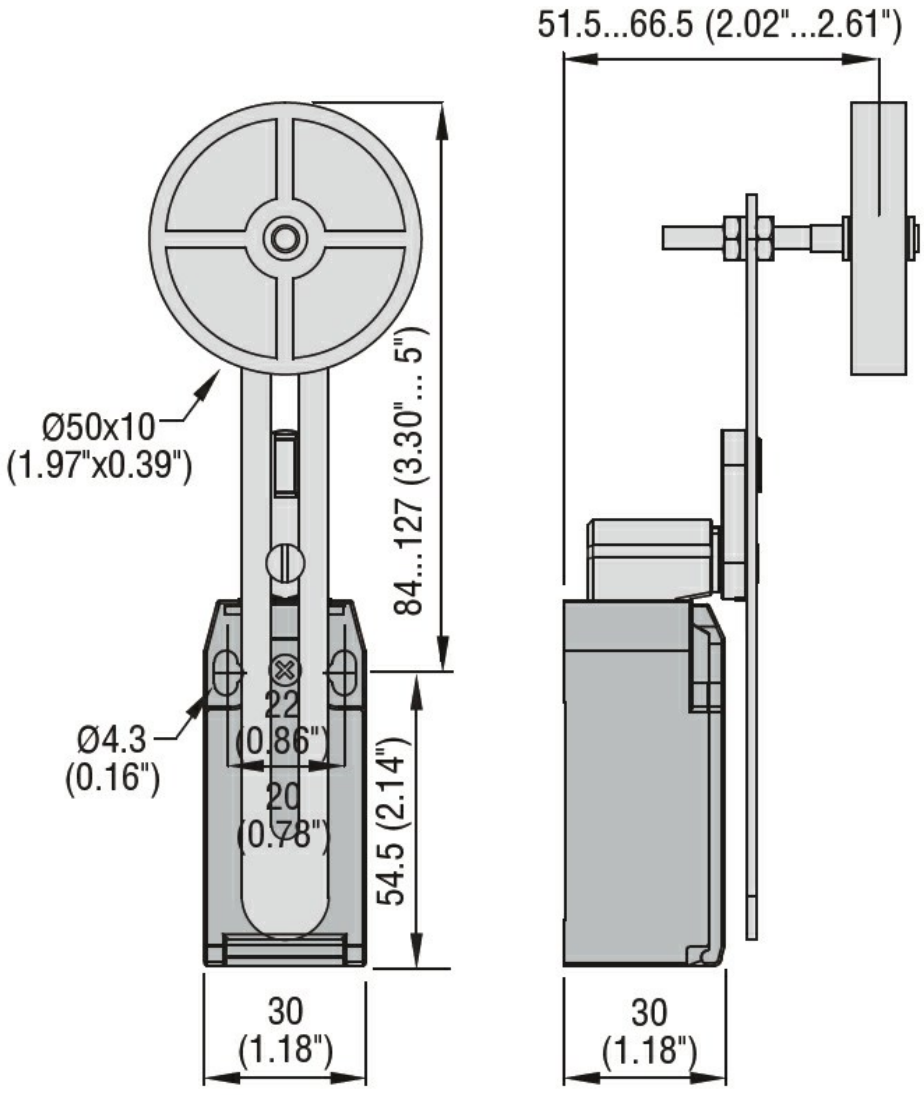

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

Wiring diagrams

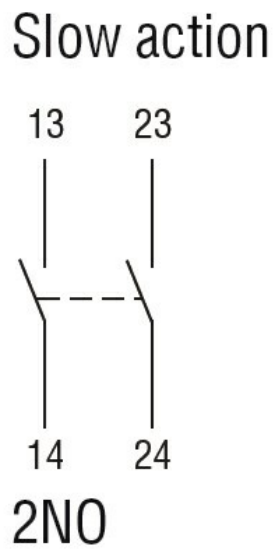

Certifications and compliance

Compliance

CSA C22.2 n° 14
EN 50047
IEC/EN 60204-1
IEC/EN 60947-1
IEC/EN 60947-5-1
UL508

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC000030 - End switch

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding