# KPF1L11

PREWIRED WITH 2M LONG CABLE METAL LIMIT SWITCH, K SERIES, ADJUSTABLE ROLLER LEVER. CONTACTS 1NO+1NC SLOW ACTION

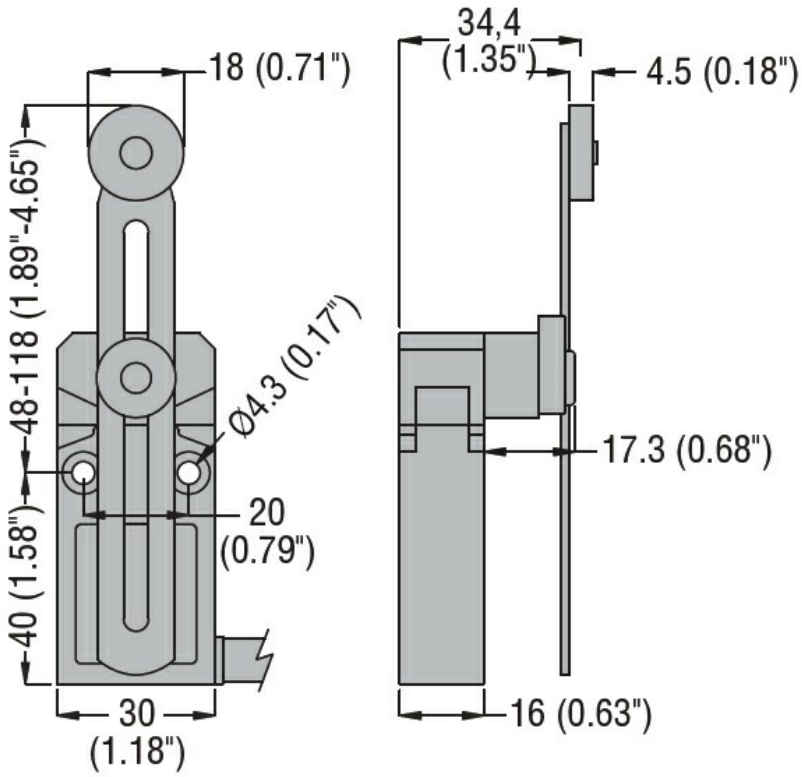


| | | | |
|---|---|---|---|
| Product designation | | | Adjustable roller lever |
| Product type designation | | | KPF1 |
| **General characteristics** | | | |
| Material | | | |
| | Housing | | Aluminium-zinc alloy |
| | Roller | | Plastic |
| **Contact characteristics** | | | |
| Type of contact | | | 1NO+1NC Slow action |
| Thermal current Ith | | A | 10 |
| IEC/EN 60947-5-1 designation | | | B300 R300 |
| Rated insulation voltage Ui | | V | 400 |
| Rated impulse withstand voltage Uimp | | kV | 4 |
| Insulation class | | | I |
| IEC Conventional free air thermal current Ith | | A | 10 |
| Resistance per pole (average value) | | mΩ | <25 |
| Conductivity | | | 10mA 5V |
| **Mechanical features** | | | |
| Operating head fixing | | | Fixed |
| Operating torque | | | |
| | | N | 80 |
| | | Ib | 0.7 |
| Tightening torque (Max) | | | |
| | Switch fixing | | |
| | | Nm | 2.5 |
| | | lbin | 22.1 |
| Cable connection | | | 2m / 5xAWG18-0.75mm2 PVC Style 2517 |
| Weight | | g | 344 |
| **Operations** | | | |
| Mechanical life | | cycles | >10000000 |
| Mechanical operation | | cycles/h | 3600 |
| **Ambient conditions** | | | |
| Temperature | | | |
| | Operating temperature | | |
| | min | °C | -25 |
| | max | °C | +70 |
| | Storage temperature | | |
| | min | °C | -40 |
| | max | °C | +70 |
| **Resistance & Protection** | | | |
| IP degree | | | |
| | Body housing | | IP67 |

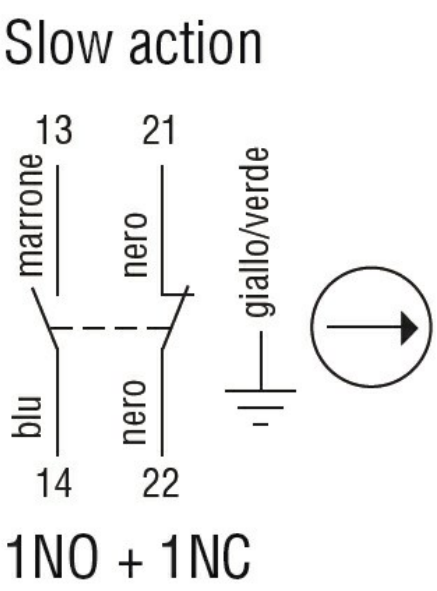

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

| | |
|---|---|
| Pollution degree | 3 |

## Dimensions




## Wiring diagrams




## Certifications and compliance

| | |
|---|---|
| Compliance | |
| | CSA C22.2 n° 14. |
| | IEC/EN 60947-1 |
| | IEC/EN 60947-5-1 |
| | UL508 |
| Certificates | |
| | cULus |
| | EAC |

## ETIM classification


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

ETIM 8.0

EC000030 - End switch


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding