
BX80S/30-1H


BX80

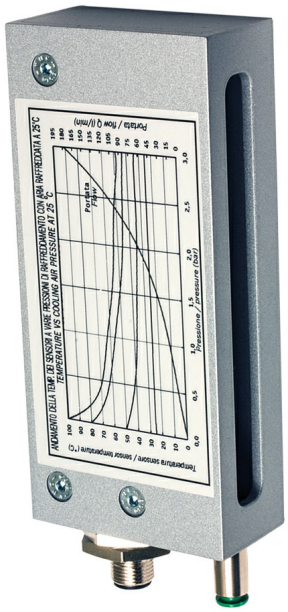

Indicative image

HIGH RESOLUTION CUBIC HOUSING AREA SENSOR

- Controlled heightt 70 mm
- Operating distance up to 2 m
- Microprocessor based circuit
- Sensitivity adjustment
- Strong cubic housing
- Special version with metallic enclosure for high-duty use
- Protection degree IP67
- Complete protection against electrical damages

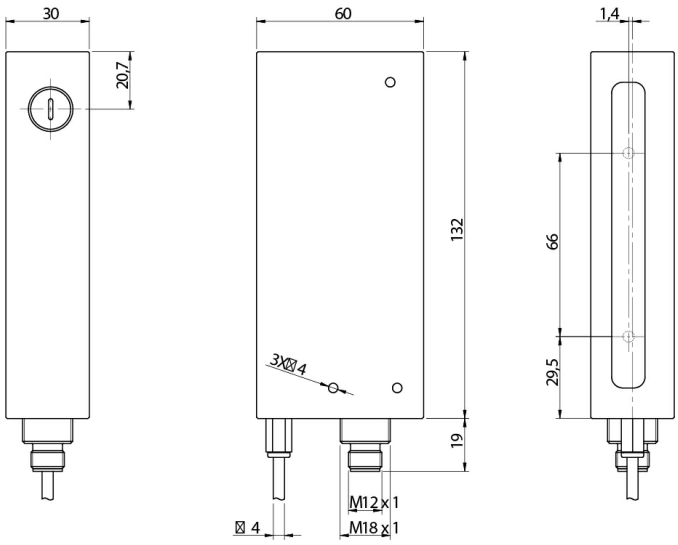

Detection properties

Nominal sensing distance	depending on the receiver
Thermal drift of Sr	≤10%
Beams space	6mm
controlled height	70mm
minimum detectable object	Dipende dal ricevitore
number of rays	12
Sensitivity adjustment	Yes

Application

Function Principle	Emitter

Outputs

Output type	Emitter
Output Function	Emitter
Switching frequency	3ms

Electrical data

Operating Voltage	12 - 24Vdc
No-Load supply current	100mA
Load current	≤100mA
Leakage current	10µA
Output voltage drop	≤1.2V IL =100 mA
Max ripple content	≤ 10%
LED indicators	green (supply), red (alarm sync.), yellow (area state)
Time delay before availability	500ms
Short-circuit protection	Yes (auto reset)
Reverse Polarity Protection	Yes
Emission	Infrared (880 nm)
Interference to external light	1.500 lux max. (incandescent lamp), 4.500 lux max. (sunlight)
Impulsive Overvoltage Protection	Yes

Mechanical data

Dimensions	60mm x 132mm x 30mm
Weight	260 ... 300g
Housing Material	PBT
Connections	M12 plug
Active Head Material	PC
Tightening torque	25Nm
Operating temperature	-25°C...+50°C (without freeze)
Storage temperature	-40°C...+80°C


Test/Approvals

Approvals	CE
EMC compatibility	IEC 60947-5-2
Shocks and vibrations	IEC EN 60947-5-2
Degree of protection	IP67


Generical Data

Dimensions	60mm x 132mm x 30mm
Operating Temperature	-25°C...+50°C (without freeze)
Mechanical Protection	IP67

ELECTRICAL DIAGRAMS OF THE CONNECTIONS

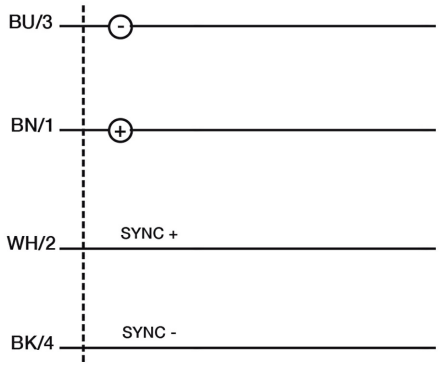

CONNECTOR

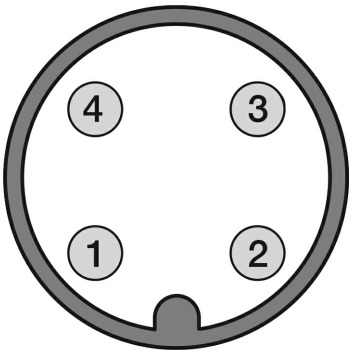

Datasensing S.r.l.
Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@datasensing.com

date of printing
29/04/2022 00:07:37