SMT 3000HC SG T3

Thru Beam

Photoelectric Sensors



Compatible Receivers:

SMR 3315 SG T3
SMR 3015 SG T3
SMR 3115 SG T3
SMR 3215 SG T3

Product Data	
Function	Transmitter
Operation Mode	Thru Beam
Supply Voltage	10 - 30 V dc
Control Feature	Adjustable range and test input
Connection	3 pin, M8 plug
Sensing Range	15 m
Light Source	Infrared (880 nm)
Housing Material	Plastic
Housing	9,5 x 11,5

Technical Data	
Supply Voltage	10 - 30 V dc
Voltage Ripple	15 %
Reverse Polarity Protected	Yes
Current Consumption	Max. 30 mA
Test Input	Yes
Control Input	Adjustable range
Power On Indicator	Green LED
Light Source	Infrared (880 nm)
Emission Angle	+/- 12°
Housing Material, Front Lens	Polycarbonate
Housing Material, Sensor Housing	Polyester
Cable	3 x 0,14 mm²
Cable Sleeve	PVC Ø 3,4 mm


Environmental Data	
Vibration	10 - 55 Hz, 0,5 mm
Shock	30 g

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.


Operation Temperature	-20 to +50 °C
Storage Temperature	-40 to +80 °C
Sealing Class	IP 67

Approvals

Wiring Diagram

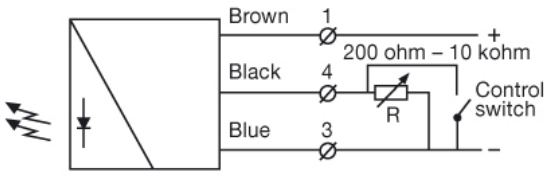


Connections

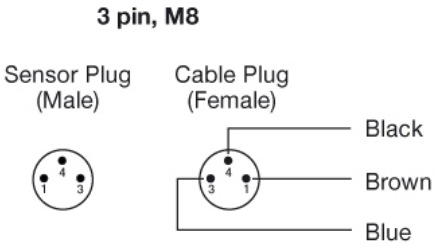


COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

Parallel Displacement

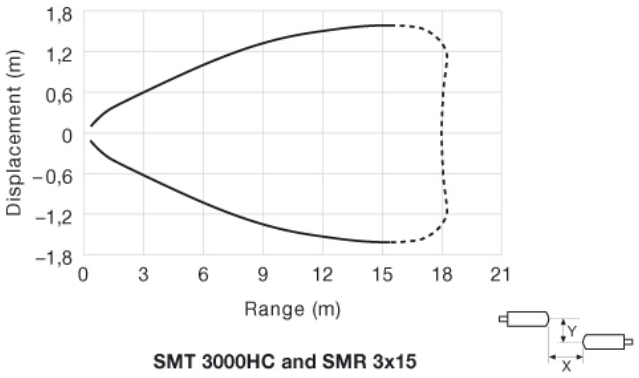

SMT 3000HC and SMR 3x15


Angular Displacement

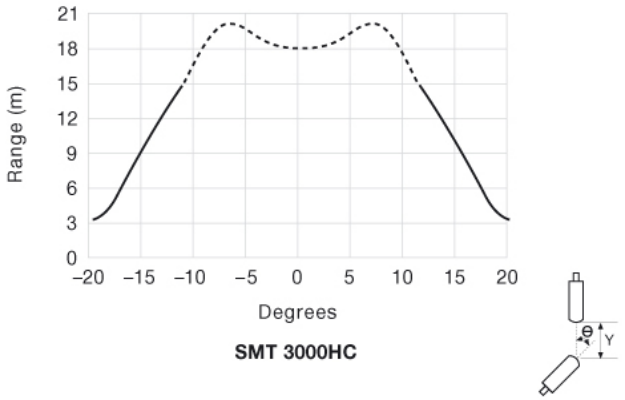

SMT 3000HC

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

Dimensions

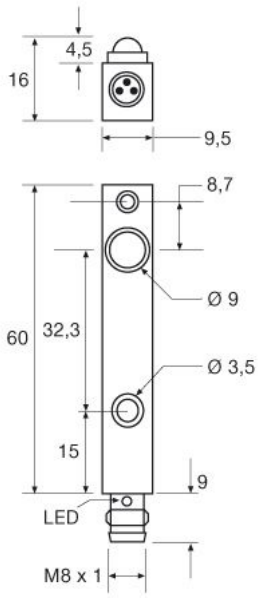

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.