
SIEMENS

Data sheet 6XV1830-0EH10

product type designation	**PROFIBUS FC Standard Cable GP**
product description	Standard bus cable (2-core), sold by the meter, unassembled
	PROFIBUS FC Standard Cable GP, bus cable 2-wire, shielded, special configuration for quick assembly, Delivery unit: max. 1000 m, minimum order quantity 20 m sold by the meter

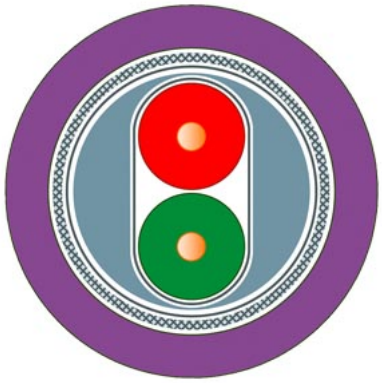

suitability for use	Standard cable specially designed for fast, permanent installation
cable designation	02YSY (ST) CY 1x2x0,64/2,55-150 VI KF 40 FR
electrical data	
attenuation factor per length	
● at 9.6 kHz / maximum	0.0025 dB/m
● at 38.4 kHz / maximum	0.004 dB/m
● at 4 MHz / maximum	0.022 dB/m
● at 16 MHz / maximum	0.042 dB/m
impedance	
● rated value	150 Ω
● at 9.6 kHz	270 Ω
● at 38.4 kHz	185 Ω
● at 3 MHz … 20 MHz	150 Ω
relative symmetrical tolerance	
● of the characteristic impedance at 9.6 kHz	10 %
● of the characteristic impedance at 38.4 kHz	10 %
● of the characteristic impedance at 3 MHz … 20 MHz	10 %
loop resistance per length / maximum	110 mΩ/m
shield resistance per length / maximum	9.5 Ω/km
capacity per length / at 1 kHz	28.5 pF/m
operating voltage	
● RMS value	80 V
mechanical data	
number of electrical cores	2
design of the shield	Overlapped aluminum-clad foil, sheathed in a braided screen of tin-plated copper wires
type of electrical connection / FastConnect	Yes
outer diameter	
● of inner conductor	0.65 mm
● of the wire insulation	2.55 mm
● of the inner sheath of the cable	5.4 mm
● of cable sheath	8 mm
symmetrical tolerance of the outer diameter / of cable sheath	0.4 mm
material	
● of the wire insulation	polyethylene (PE)
● of the inner sheath of the cable	PVC
● of cable sheath	PVC
color	

● of the insulation of data wires	red/green
● of cable sheath	Violet
bending radius	
● with single bend / minimum permissible	37.5 mm
● with multiple bends / minimum permissible	75 mm
tensile load / maximum	100 N
weight per length	78 kg/km
ambient conditions	
ambient temperature	
● during operation	-40 ... +75 °C
● during storage	-40 ... +75 °C
● during transport	-40 ... +75 °C
● during installation	-40 ... +75 °C
● note	Electrical properties measured at 20 °C, tests according to DIN 47250 part 4 respectively DIN VDE 0472
fire behavior	flame resistant according to IEC 60332-3-24 (Category C) and UL 1685 (CSA FT 4)
class of burning behaviour / according to EN 13501-6	Eca
chemical resistance	
● to mineral oil	oil resistant according to IEC 60811-2-1 (4 h / 70°C)
● to grease	Conditional resistance
● to water	conditional resistance
radiological resistance / to UV radiation	resistant
product features, product functions, product components / general	
product feature	
● halogen-free	No
● silicon-free	Yes
standards, specifications, approvals	
UL/ETL listing / 300 V Rating	Yes; c(ETL)us, CMG / (ETL)us CL3 / Sun Res
UL/ETL style / 600 V Rating	Yes; cRUus AWM 21694 AWM I A/B 60°C 600V FT2
certificate of suitability	
● EAC approval	Yes
● CE marking	Yes
● UL approval	Yes
● RoHS conformity	Yes
Marine classification association	
● American Bureau of Shipping Europe Ltd. (ABS)	No
● French marine classification society (BV)	No
● Det Norske Veritas (DNV)	No
● Germanische Lloyd (GL)	No
● Lloyds Register of Shipping (LRS)	No
● Nippon Kaiji Kyokai (NK)	No
● Polski Rejestr Statkow (PRS)	No
reference code	
● according to IEC 81346-2	WG
● according to IEC 81346-2:2019	WGB