Baumer
Passion for Sensors

Diffuse sensors with intensity difference

O200.ZR-NV1T.72CV/E026_H006

Article number: 11231267

overview

- Reliable intensity-based object detection
- qTeach - tamper-proof, simple teach-in with ferromagnetic tool
- Quick mounting by means of M3 threaded bushes made of stainless steel



Technical data

general data	
type	intensity difference
light source	pulsed red LED
sensing distance Tw	20 … 200 mm
smallest object recognizable typ.	2 mm at 100 mm
alignment / soiled lens indicator	flashing output indicator
power on indication	LED green
output indicator	LED yellow
sensing distance adjustment	qTeach
wave length	644 nm
suppression of reciprocal influence	yes
beam type	point
alignment optical axis	< 1,5°
electrical data	
response time / release time	< 0,25 ms
jitter	< 0,06 ms
voltage supply range +Vs	10 … 30 VDC
current consumption max. (no load)	40 mA (@ 10 VDC)

electrical data	
current consumption typ.	16 mA (@ 24 VDC)
voltage drop Vd	< 2 VDC
output function	light / dark operate
output circuit	NPN complementary
output current	< 50 mA
short circuit protection	yes
reverse polarity protection	yes
mechanical data	
width / diameter	8 mm
height / length	25,1 mm
depth	15,8 mm
type	rectangular
mechanical mounting	threaded sleeves M3 (stainless steel)
housing material	plastic (ASA, PMMA)
front (optics)	PMMA
connection types	cable 4 pin, 2 m
cable characteristics	PVC / PVC 4 x 0,08 mm²
ambient conditions	
operating temperature	-25 … +50 °C
protection class	IP 67


The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.
2020-06-03

Diffuse sensors with intensity difference


O200.ZR-NV1T.72CV/E026_H006

Article number: 11231267


dimension drawing

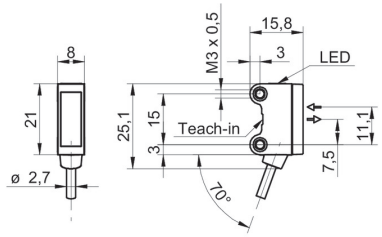


connection diagram

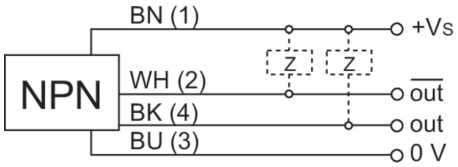

beam characteristic (typically)

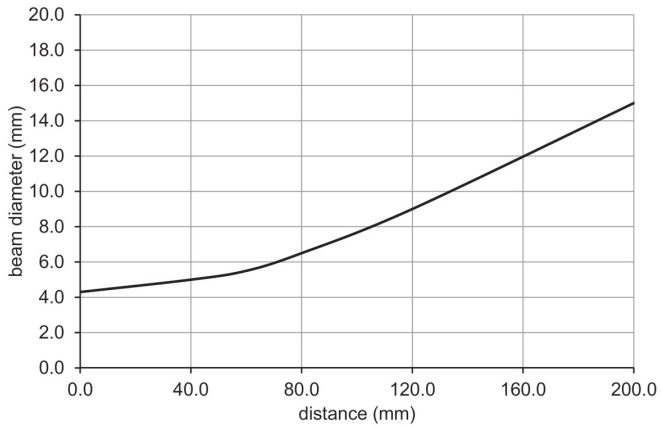

relative receiving signal

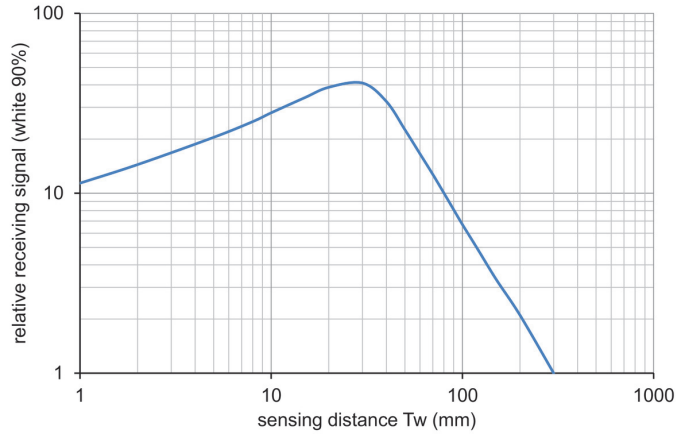

2020-06-03 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.