Amplifier

AC-Voltage supply
DC-Voltage supply


LED indication

Cable break and
short circuit monitoring




Design	*OKZ 550 GWR*

Dimensions



ID-No.		**P50030**
Type		OKZ 550 GWR
Supply voltage	[V]	24 DC / 230 AC
Current consumption	[mA]	60 / 10
Sensing range		adjustable
Hysteresis		max. 10%
Light on / dark on		switchable
Output		relay with change-over conact
Switching current		max. 4 A / 250 V AC
Switching power		1000 VA / cos φ > 0.7 / L/R < 200 ms
Switching frequency	[Hz]	5
Ambient temperature	[°C]	−20...+60
EMC-class		A
Protection	[EN60529]	screw terminals IP 20, housing IP 40
Function indicator		LED yellow
Housing material		Polycarbonate

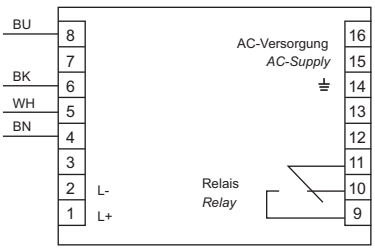

Connection	screw terminals