LVMP10A415

START-UP PRIORITY CHANGE RELAY, MODULAR VERSION, 2 OUTPUTS. AC SUPPLY VOLTAGE, 380...415VAC




Product designation			Start-up priority change relay. Possible starting of stand-by motor. Modular version
Product type designation			LVMP10
Function			Start-up priority change relay. Possible starting of stand-by motor
Auxiliary supply			
Supply voltage Type			Single voltage
Rated auxiliary supply voltage Us AC			
	min	VAC	380
	Max	VAC	415
Operating voltage range			0.85...1.1 Us
Rated frequency		Hz	50/60
Power consumption Max		VA	4.8
Power dissipation Max		W	3
Relay outputs			
Number of relays		Nr.	2
Relay state			Normally de-energised, energises at tripping
Contact arrangement			2 x 1NO-SPST contact
Rated operational voltage AC (IEC)		VAC	250
Maximum switching voltage		VAC	400
IEC Conventional free air thermal current Ith		A	8
UL/CSA and IEC/EN 60947-5-1 designation			B300
Electrical life (with rated load)		cycles	10^5
Mechanical life		cycles	$30x10^6$
Indications			
Indication			1 green LED for power on 1 red LED for relay state
Functions			
3 detecting electrodes (MIN, MAX and COM)			No
5 detecting electrodes (MIN1, MAX1, MIN2, MAX2 and COM			No
Sensitivity adjustment 2.5...50k Ω			No
Sensitivity adjustment 2.5...100k Ω			No
Sensitivity adjustment 2.5...200k Ω			No

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding


Adjustable sensitivity full-scale value 25-50-100-200 k Ω			No
Separate sensitivity adjustment for MAX probe (foam detection)			No
Emptying function			No
Filling function			No
Emptying function with MIN and/or MAX alarm			No
Filling function with MIN and/or MAX alarm			No
Emptying function with pump priority change			No
Filling function with pump priority change			No
Tank filling, well drawing and alarm			No
Filling-emptying adjustment selector			No
Programming selector for 5 different			No
Motor start-up priority change			No
Connections			
Terminals type			Screw
Tightening torque for terminals			
	max	Nm	0.8
	max	Ibin	7
Conductor cross section			
AWG/Kcmil			
	min	AWG	24
	Max	AWG	12
IEC			
	min	mm²	0.2
	Max	mm²	4
Insulations			
Rated insulation voltage Ui		V	415
Rated impulse withstand voltage Uimp		kV	4
Operating frequency withstand voltage		kV	2.5
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-20
	max	°C	+60
Storage temperature			
	min	°C	-30
	max	°C	+80
Housing			
Execution			Modular DIN rail mounting
N° of modules			3
Material			Self-extinguishing polyamide
Mounting			35mm DIN rail (IEC/EN 60715) or by screws using extractable clips
IEC degree of protection			IP40 on front / IP20 on terminals
Dimensions (W x H x D)		mm	53.5 x 104.7 x 64.9
Weight		g	250
Dimensions			

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

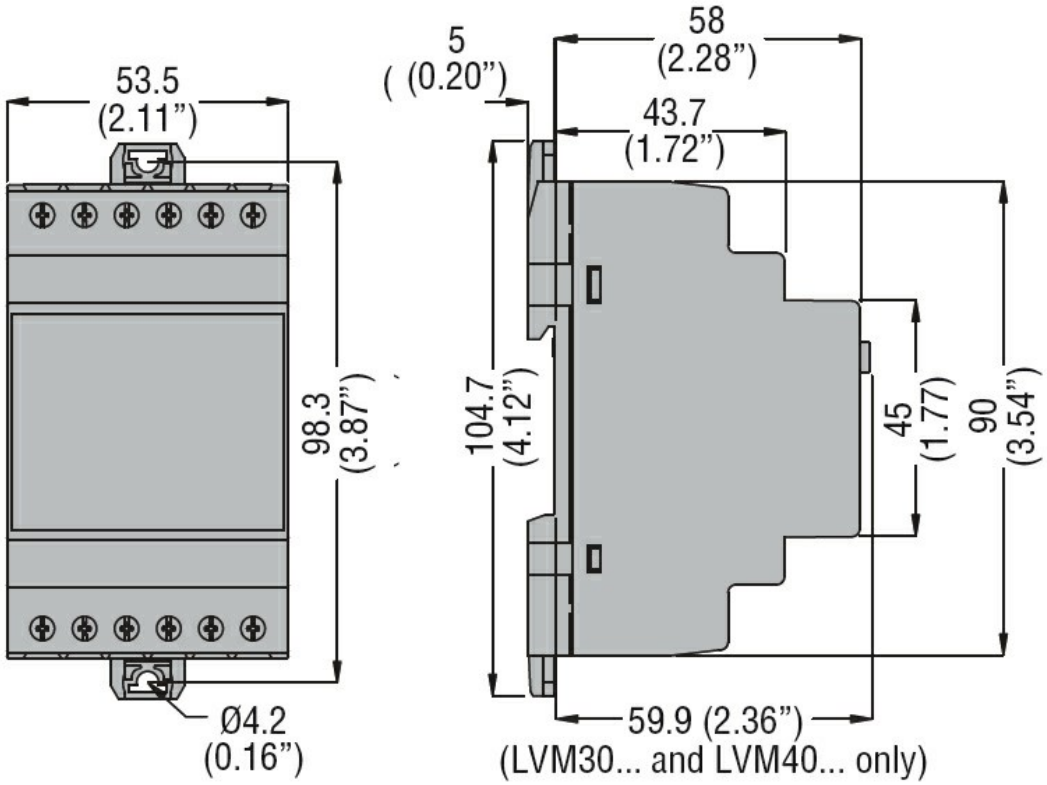


Wiring diagrams

2-wire connection

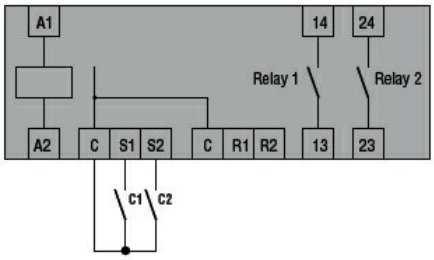

C1 = Primary
C2 = Secondary / Standby

3-wire connection

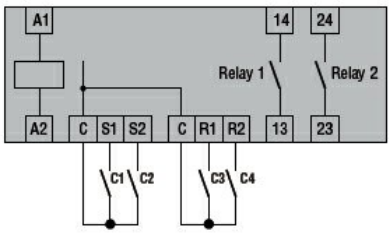

C1 = Start Primary
C2 = Start Standby
C3 = Stop Primary
C4 = Stop Standby

Certifications and compliance

Compliance

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

	CSA C22.2 n° 14
	IEC/EN 60255-5
	IEC/EN 61000-6-2
	IEC/EN 61000-6-3
	UL508
Certificates	
	cULus
	EAC

ETIM classification

ETIM 8.0	EC001447 - (Fill) level monitoring relay

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding