

# LV-NH300

Sensor head, Area Thrubeam, High performance

CE

*Please note that accessories depicted in the image are for illustrative purposes only and may not be included with the product.

## Specifications


| | | |
|---|---|---|
| Model | | LV-NH300 |
| Type | | Area thrubeam, High performance |
| FDA (CDRH) Part 1040.10 | | Class 1 Laser Product |
| IEC 60825-1 | | |
| Light source | | Visible red semiconductor laser, Wavelength: 660 nm |
| Detecting distance | MEGA | 2000 mm 78.74"<br>(Detecting area: 30 mm 1.18") |
| | ULTRA | |
| | SUPER | |
| | TURBO | |
| | FINE | |
| | HSP | |
| Environmental resistance | Ambient temperature | -10 to +55 °C 14 to 131 °F (No freezing) |
| | Relative humidity | 35 to 85 % RH (No condensation) |
| Material | Case | Glass reinforced plastic |
| | Lens cover | Transmitter: Glass, Receiver: Polyarylate |
| Weight | | Approx. 95 g |

# Dimensions

* Download CAD file or product manual for larger image/text and more detail.

LV-NH300

LV-NH300T

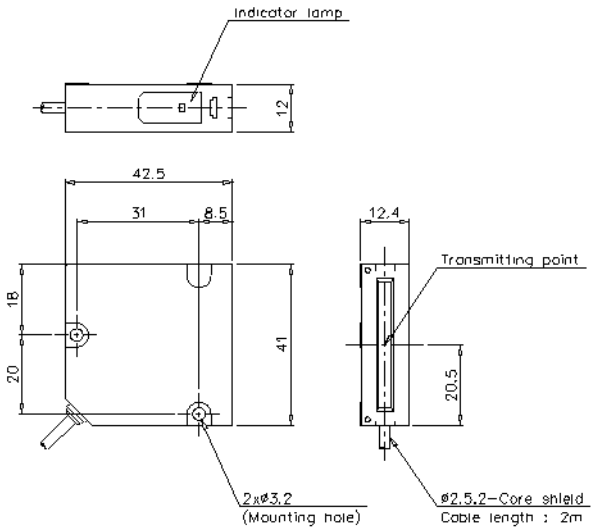


LV-NH300R

