Baumer
Passion for Sensors

Profile sensors

OXE7.E25T-LB3C.SIMD.7AI

Edge Tools

Article number: 11174280

Overview

- measuring mode: edges, center, width, gap
- 150 … 250 mm
- pulsed red laser diode
- analog and RS 485
- Touch Display, RS485
- connector M12 8 pin
- -20 … 50 °C
- IP 67



Picture similar

Technical data

General data	
Type	Measuring mode: edges, center, width, gap
Version	PosCon OXE7 - for very dark objects
Measuring range (width)	75 … 125 mm
Measuring range (distance)	150 … 250 mm
Measuring frequency	90 … 250 Hz
Resolution	30 … 50 µm
Repeat accuracy	± 10 µm
Smallest detectable object width	1,5 mm
Smallest detectable gap	2,5 mm
Smallest detectable step	2 mm
Linearity error	± 80 … 120 µm
Temperature drift	< 0,05 % measured value/K
Power on indication	LED green
Output indicator	LED yellow / LED red
Light source	Pulsed red laser diode
Wave length	656 nm
Laser class	1
Optical peak power max.	15 mW
Adjustment	Touch Display, RS485
Electrical data	
Response time / release time	8 … 22 ms
Voltage supply range +Vs	15 … 28 VDC

Electrical data	
Current consumption max. (no load)	150 mA
Output circuit	Analog and RS 485
Output signal	4 ... 20 mA / 0 ... 10 VDC
Switching output	Push-pull
Output function	Out 1 / Alarm
Output current	< 100 mA
Baud rate	115200, adjustable
Reverse polarity protection	Yes, Vs to GND
Short circuit protection	Yes
Mechanical data	
Width / diameter	26 mm
Height / length	74 mm
Depth	55 mm
Type	Rectangular, front view
Housing material	Aluminum
Front (optics)	Glass
Connection types	Connector M12 8 pin
Weight	130 g
Ambient conditions	
Ambient light immunity	< 35 kLux
Operating temperature	-20 … +50 °C
Protection class	IP 67
Storage temperature	-25 … +75 °C

2021-01-05 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

OXE7.E25T-LB3C.SIMD.7AI

Edge Tools

Article number: 11174280

Technical data

Ambient conditions

Vibration (sinusoidal)	IEC 60068-2-6:2008 1.5 mm p-p at f = 10 - 57 Hz, 10 cycles per axis 10 g at f = 58 - 2000 Hz, 10 cycles per axis

Ambient conditions

Shock (semi-sinusoidal)	IEC 60068-2-27:2009 50 g / 11 ms resp. 100 g / 6 ms, 10 jolts per axis and direction 100 g / 2 ms, 5000 jolts per axis and direction

Remarks


- Conditions for the following characteristics:
- Measuring frequency 1) 2)
- Resolution 1) 3)
- Repeat accuracy 1) 3)
- Linearity error 1) 4)
- Response time / release time 1) 2) 3)
- 1) Measurement with Baumer standardized measuring equipment and targets. Measuring on 90% reflectivity (white)
- 2) Depending on the size of the measuring field and OBJECT light/dark mode
- 3) Without filtering / no averaging
- 4) Measured symmetrically around the reference point with 50% of the measuring field

Laser warning


CLASS 1 LASER PRODUCT

IEC 60825-1/2014
Complies with 21 CFR 1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed. 3., as described in Laser Notice No. 56, dated May 8, 2019


Pin assignment




Dimension drawing

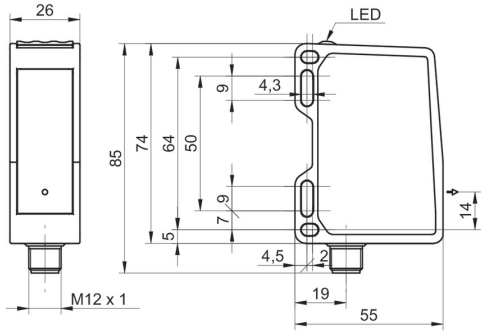

Connection diagram

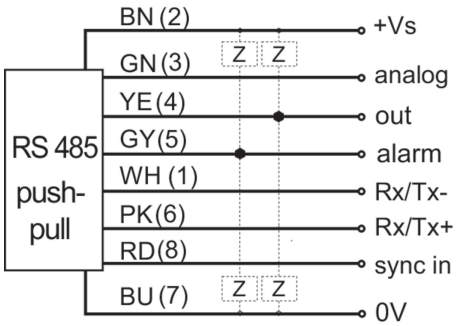

Alignment of the laserline

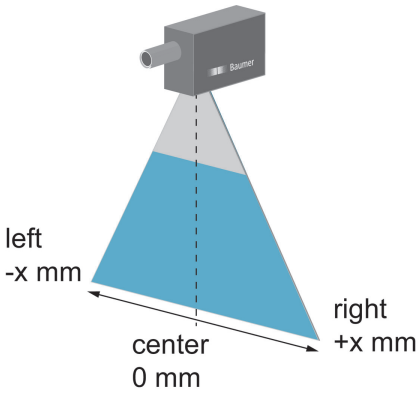

2021-01-05 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.