ADXNP00624

SOFT STARTER, ADXNP... TYPE, ADVANCED VERSION, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 24VAC/DC. RATED OPERATIONAL VOLTAGE 208...600VAC, 6A



Product designation				Soft starter advanced
Product type designation				ADXNP
Motor type				Asynchronous three phase
Electrical features				
Supplies voltage				
		Type of system		Three phase
		Rated supply voltage	V	208…600VAC
		auxiliary supply voltage (Us)		24VAC/DC
		Rated frequency	Hz	50/60
Rated starter current Ie			A	6
Rated motor power				
	IEC ratings (T≤40°C)			
		230VAC	kW	1.1
		400VAC	kW	2.2
		500VAC	KW	3
	UL ratings (T≤40°C)			
		220-240VAC	HP	1.5
		380-415VAC	HP	2
		440-480VAC	HP	3
		550-600VAC	HP	5
Number of controlled phases			Nr.	2
Built-in bypass				Yes
Cooling System				Natural or forced (optional)
Rated insulation voltage Ui			V	600
Programming interface				
Potentiometer				Settings: starting voltage, acceleration ramp, deceleration ramp. Note. Potentiometers can be disabled via NFC.
Display				No
Programming with NFC technology				Yes
Optical port				Yes
Startup and stop settings				
Startup method				Voltage ramp with current limit
Stop method				Voltage ramp or free-wheel stop
Acceleration ramp			s	1-20
Deceleration ramp			s	0-20

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

Startup voltage		%	30-80
Protections			
Power supply Protection			No power line, phase loss, frequency out of limits, minimum and maximum voltage and phase sequence
Motor protection			Electronic current thermal protection (overload), locked rotor, current asymmetry, load too low, starting too long
Starter protection			Overtemperature and overcurrent
Functions			
Built-in bypass			Yes
Built-in display and keypad			Yes
Languages			No
View measurements			No
Torque control			No
Adjustable current limit			No
Dynamic braking			Yes
Kick Start function			No
Motor overload electronic protection			Yes
Motor protection PTC input			Yes
Protection against phase loss			No
Protection against phase inversion			Yes
Protection against locked rotor			Yes
Protection against thyristor overtemperature			Yes
Protection against low load			Yes
Programmable alarm			Yes
Digital inputs			1
Analog inputs			0
Digital outputs			2
Analog output			0
Monitoring communication			No
Optical port for programming			Yes
Event log			Yes
Motor hour counter			No
Startup counter			Yes
Clock calendar			Yes
Remote external keypad			No
Input and Output			
Digital inputs			
	Number of digital input	Nr.	1
	Digital input type		Volt-free contact
	Digital input functions		Motor start
Digital outputs			

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

ADXNP00624


SOFT STARTER, ADXNP... TYPE, ADVANCED VERSION, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 24VAC/DC. RATED OPERATIONAL VOLTAGE 208...600VAC, 6A


		Number of digital output	Nr.	2
		Digital output arrangement		2 NO contacts with the same common, 5A 250VAC AC1 - 5A 30 VDC
		Digital output functions		Programmable: line contactor (Run), TOR (Top Of Ramp), alarm, max torque
Communication interfaces				
Communication interface				NFC, optical port for the connection of USB (CX01) and Wi-Fi (CX02) devices, optional RS485 module (CX04) Modbus RTU protocol
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-20
		max	°C	+60°C (with current derating >40°C)
	Storage temperature			
		min	°C	-30
		max	°C	+80
Max altitude			m	1000 without derating of the starter current
Relative humidity			%	<80%
Pollution degree				2
Installation category				III
Housing				
Mounting				Screw-fixing or 35mm DIN rail (IEC/EN/BS 60715)
IP degree of protection				IP20
Dimensions (W x H x D)			mm	45 x 139 x 113.4
Weight			Kg	0.47
Dimensions				

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

ADXNP00624

SOFT STARTER, ADXNP... TYPE, ADVANCED VERSION, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 24VAC/DC. RATED OPERATIONAL VOLTAGE 208...600VAC, 6A

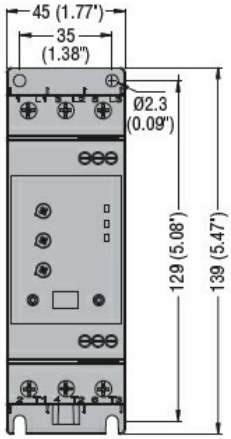

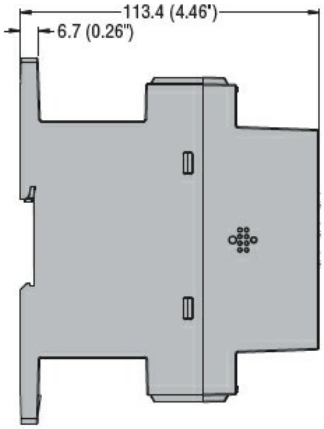

Certifications and compliance

Compliance

CSA C22.2 n° 60947-4-2
IEC/EN/BS 60947-1
IEC/EN/BS 60947-4-2
UL 60947-4-2

Certificates

cULus
EAC
RCM (pending)

ETIM classification

ETIM 8.0	EC000640 - Soft starter

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding