SGR 1-125-024-A1-C-04-3F

Self-Contained Light Curtains

Light Curtains

Compatible Transmitter:

SGT 1-125-024-A1-C-00-3F



Product Data	
Function	Receiver
Operation Mode	Thru Beam
Supply Voltage	12 - 36 V dc
Connection	3 m flexible cable
Sensing Range	4 m
Number of Channels	24
Output	Solid State Relay
Output Status	N.O.
Response	< 80 ms
Length	1250 mm
Active Height	1065 mm
Housing	12 x 30 mm
Features	Time-out Function

Technical Data	
Supply Voltage	12 – 36 V dc
Reverse Polarity Protected	Yes
Short Circuit Protected	Yes
Current Consumption	50 mA
Output Rating	200 mA
Spacing between bottom & Ch1	25 mm
Distance, Beams Pinch Point	23 mm
Channel Spacing	46 mm
Response Time	< 80 ms
Power On Indicator	Green LED
Output Indicator	Yellow LED
System Status Indicator	Red LED
Time-out Function	Up to 4 non-adjacent channels, selectable

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.


Profile Dimensions (w x d)	Slim Line (C), 12 x 30 mm
Housing Material, Front Lens	Polycarbonate
Housing Material, Profile	Aluminium (black anodised)
Cable	5 x 0,14 mm²
Cable Sleeve	PVC Ø 4,1 mm

Environmental Data	
Operation Temperature	–20 to +65 °C
Storage Temperature	–40 to +80 °C
Sealing Class	IP 67
Light Immunity 5˚	> 100 000 lux


Approvals

CE UK CA


Wiring Diagram

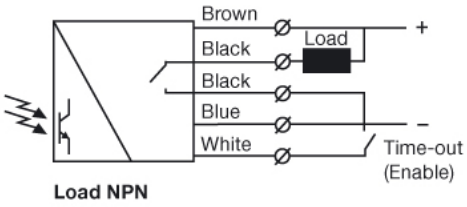

Load NPN

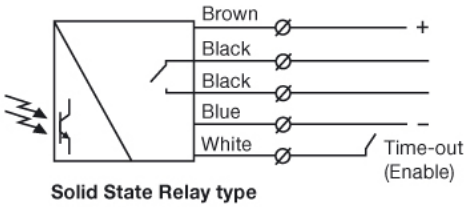


Solid State Relay type

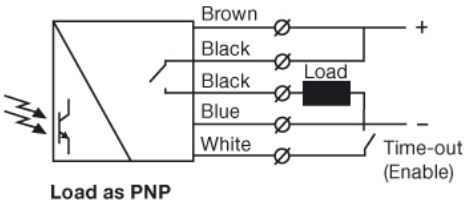

Load as PNP

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.


Parallel Displacement

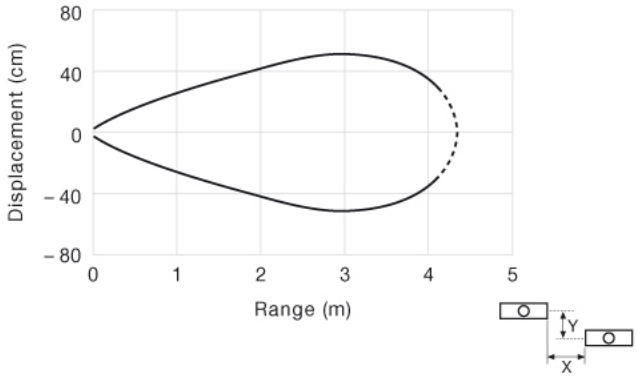

Slim Line A
and
Water-Resistant Slim Line C

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

Beam Patterns

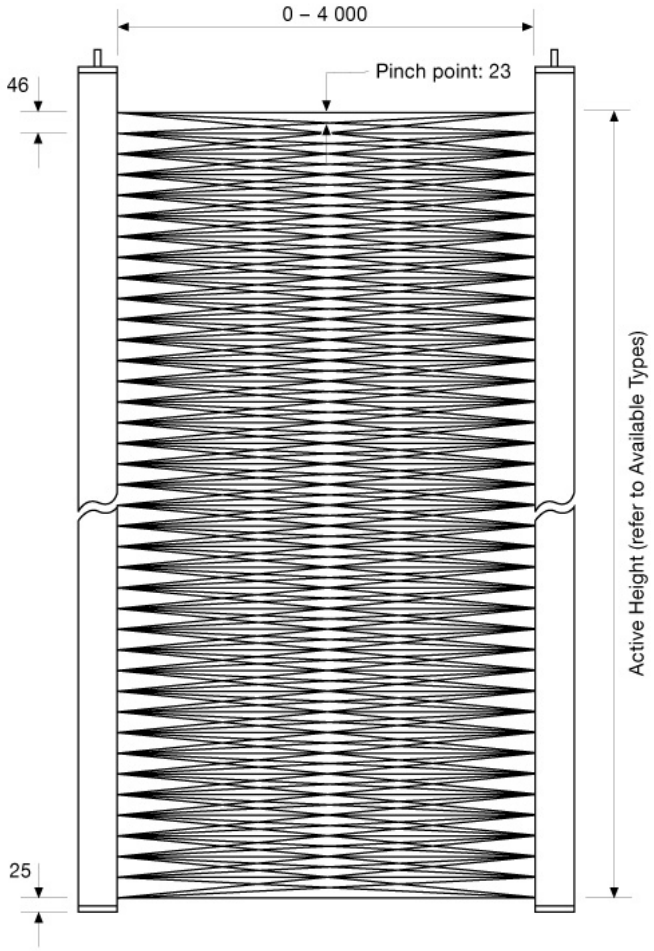


46 mm channel spacing

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

Dimensions

Details

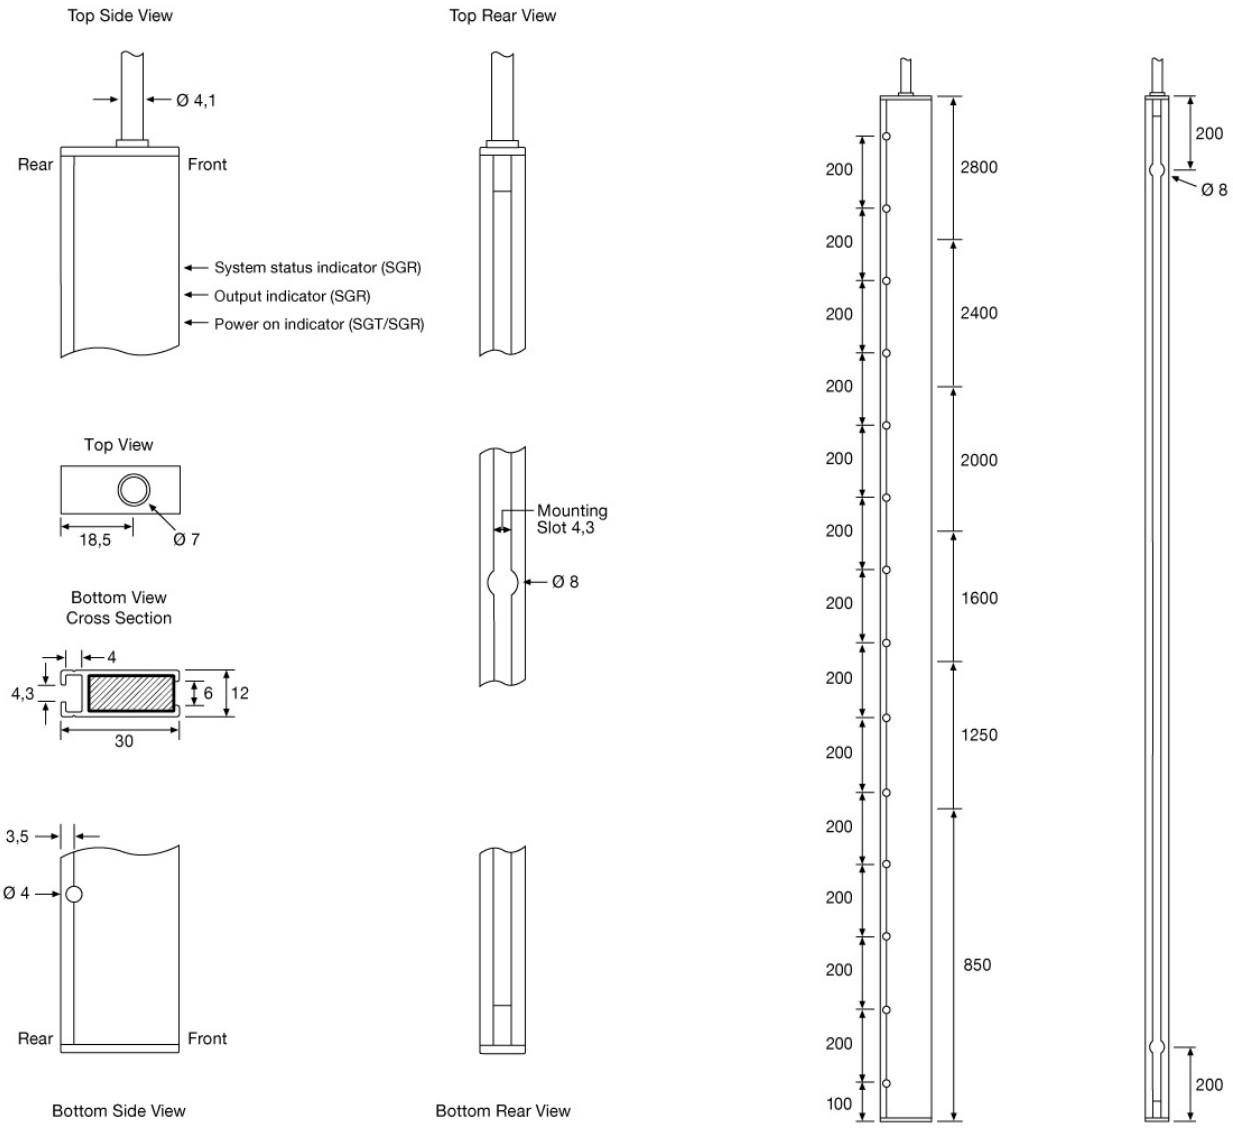

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.