SMT 9070C TS 5

Thru Beam

Photoelectric Sensors



Compatible Receivers:

SMR 9070 TS 5
SMR 9170 TS 5
SMR 9270 TS 5
SMR 9370 TS 5
SMR 9471 TS 5
SMR 9472 TS 5
SMR 9473 TS 5
SMR 9474 TS 5

Product Data	
Function	Transmitter
Operation Mode	Thru Beam
Supply Voltage	10 - 30 V dc
Control Feature	Adjustable range and test input
Connection	5 m cable
Sensing Range	70 m
Light Source	Infrared (880 nm)
Housing Material	Stainless Steel
Housing	M18 x 1


Technical Data	
Supply Voltage	10 - 30 V dc
Voltage Ripple	15 %
Reverse Polarity Protected	Yes
Current Consumption	40 mA
Test Input	Yes
Control Input	Adjustable range
Power On Indicator	Green LED
Light Source	Infrared (880 nm)
Emission Angle	+/- 4°
Housing Material, Front Lens	Polycarbonate
Housing Material, Sensor Housing	Stainless Steel (AISI 316 / 1.4401)
Cable	5 x 0,14 mm²
Cable Sleeve	PVC Ø 4,9 mm
Channel Nº	Selectable 4 channels

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.


Environmental Data	
Vibration	10 - 55 Hz, 0,5 mm
Shock	30 g
Operation Temperature	-20 to +60 °C
Storage Temperature	-40 to +80 °C
Sealing Class	IP 69K

Approvals

Wiring Diagram

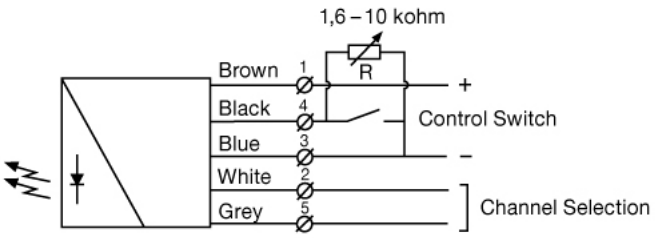


Parallel Displacement

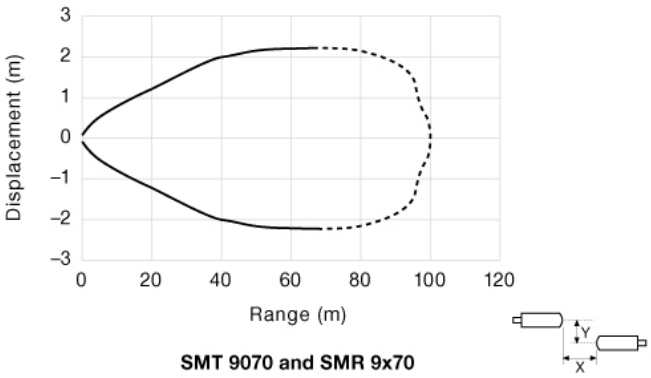


SMT 9070 and SMR 9x70

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

Angular Displacement

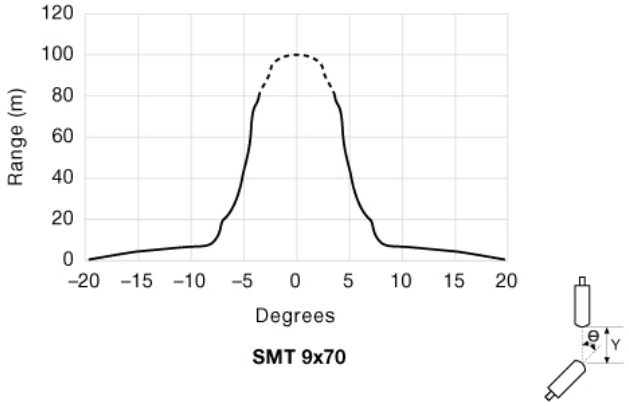


Dimensions

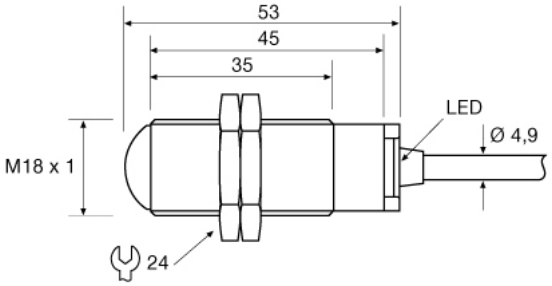

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

Excess Gain

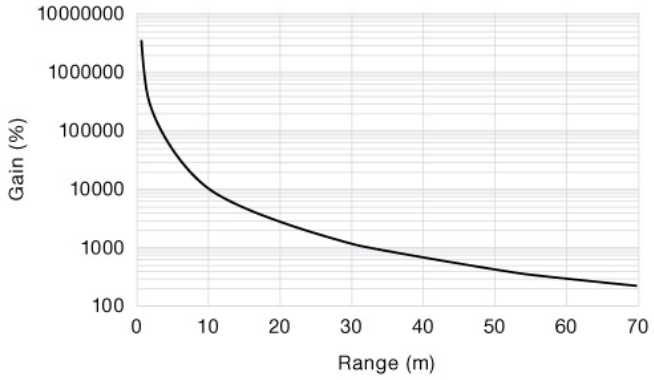

SMT 9070 and SMR 9x7x

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.