

# FU-93

Liquid-level-detection Fiber Unit

*Please note that accessories depicted in the image are for illustrative purposes only and may not be included with the product.

## Specifications


| | | |
|---|---|---|
| Model | | FU-93 |
| Type | | Reflective model fiber unit |
| Detecting method | | Wetted type |
| Fibre unit length | | 2 m78.74" free-cut |
| Fibre unit diameter | | ø1.3×2 |
| Minimum bend radius | | Fluorocarbon polymer part : R40 mm1.575"*1 fiber part : R25 |
| Environmental resistance | Ambient temperature | -40 to +70 °C -40 to 158 °F |
| Weight | | Approx. 78 g |

*1 The section 80 mm in length from the tip cannot be bent.

# Dimensions

* Download CAD file or product manual for larger image/text and more detail.

FU-93

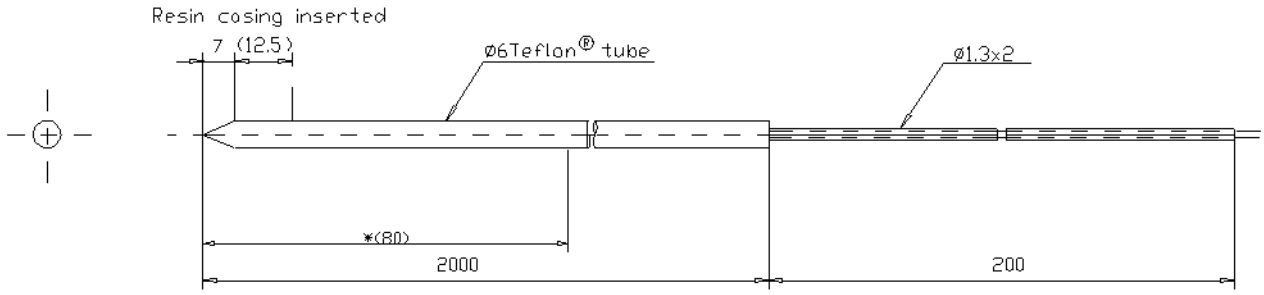


*Do not bend or cut this portion.