Photoelectrics
Diffuse-reflective
Type PD30CTD02..WE

CARLO GAVAZZI



- **Miniature sensor range**
- **Range: 200 mm - extremely wide angle**
- **Sensitivity adjustment by top potentiometer**
- **Modulated, infrared light 850 nm**
- **Supply voltage: 10 to 30 VDC**
- **Output: 100 mA, NPN or PNP preset**
- **Make and break switching function**
- **LED indication for output, stability and power ON**
- **Protection: reverse polarity, short circuit and transients**
- **Excellent EMC performance**

Product Description

The PD30CTD02..WE sensor family comes in a compact 10 x 30 x 20 mm reinforced PMMA/ABS housing.
These sensors are designed to detect PCBs despite large holes in the plates.
Compact housing and high power LED for excellent performance-size ratio.
The potentiometer function for adjustment of the sensitivity makes the sensors highly flexible. The output type is preset (NPN or PNP), and the output switching function is NO and NC output.

Ordering Key

PD30CTD02NAWE

- **Type**
- **Housing style**
- **Housing size**
- **Housing material**
- **Housing**
- **Detection principle**
- **Sensing distance**
- **Output type**
- **Output configuration**
- **Extremely Wide Angle**

Type Selection

Housing W x H x D	Range S_n	Connection	Ordering no. NPN Make and break switching	Ordering no. PNP Make and break switching
10 x 30 x 20 mm	200 mm	Cable	**PD 30 CTD 02 NAWE**	**PD 30 CTD 02 PAWE**

Specifications EN 60947-5-2

Rated operating distance (S_n)	Up to 200 mm, reference target Kodak test card R27, white, 90% reflective, 200 x 200 mm
Blind zone	0 mm @ maximum distance
Sensitivity	
Electrical adjustment	210°
Mechanical adjustment	240°
Temperature drift	≤ 0.2%/°C
Hysteresis (H)	5% to 20%
Rated operational volt. (U_B)	10 to 30 VDC (ripple included)
Ripple (U_{rpp})	≤ 10%
Output current	
Continuous (I_e)	≤ 100 mA
Short-time (I)	≤ 100 mA (max. load capacity 100 nF)
No load supply current (I_o)	≤ 25 mA @ U_B max
Minimum operational current (I_m)	≤ 0.5 mA
OFF-state current (I_r)	≤ 100 µA

Voltage drop (U_d)	≤ 2 VDC @ I_e max
Protection	Short-circuit, reverse polarity and transients
Light source	LED, 850 nm
Light type	Infrared, modulated
Emitter angle	± 15° @ half the sensing distance
Light spot	
0.5 times the sensing distance	54 x 54 mm
Ambient light	≤ 10,000 lux
Operating frequency (f)	≤ 1000 Hz
Response time	
OFF-ON (t_{ON})	≤ 0.5 ms
ON-OFF (t_{OFF})	≤ 0.5 ms
Power ON delay (t_v)	≤ 30 ms
Output function	
Open collector	NPN or PNP by sensor type
Output switching function	N.O. and N.C.

ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru
Sensoren

CARLO GAVAZZI


Specifications (cont.)

Indication	
Output ON	LED, yellow
Signal stability ON and Power ON	LED, green. See curve for condition of stability
Environment	
Installation category	III (IEC 60664/60664A; 60947-1)
Pollution degree	3 (IEC 60664/60664A; 60947-1)
Degree of protection	IP 67 (IEC 60529; 60947-1)
Ambient temperature	
Operating	-25° to +60°C (-13° to +140°F)
Storage	-40° to +70°C (-40° to +158°F)
Vibration	10 to 150 Hz, 1.0 mm/15 G (IEC 60068-2-6)
Shock	30 g / 11ms, 3 pos, 3 neg per axis (IEC 60068-2-6, 60068-2-32)


Rated insulation voltage	≤ 500 VAC (rms)
Housing material	
Body	ABS Light Grey
Frontglas	PMMA Red
Trimmer shaft	POM Dark Grey
Connection	PVC, black, 2 m 4 x 0.14 mm², Ø = 3.3 mm
Weight	≤ 50 g
CE-marking	Yes
Approvals	cULus (UL508, CSA C22.2)

Operation Diagram


Tv = Power ON delay

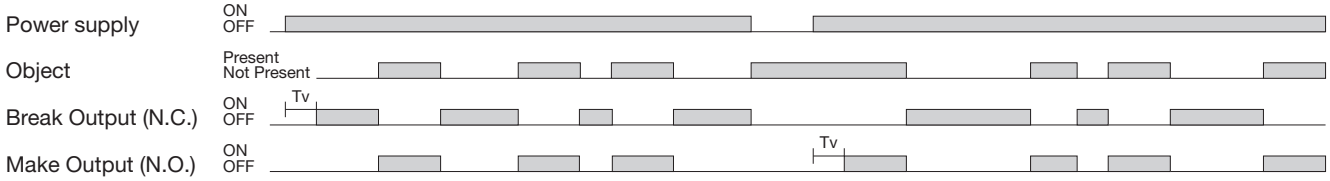

Signal Stability Indication

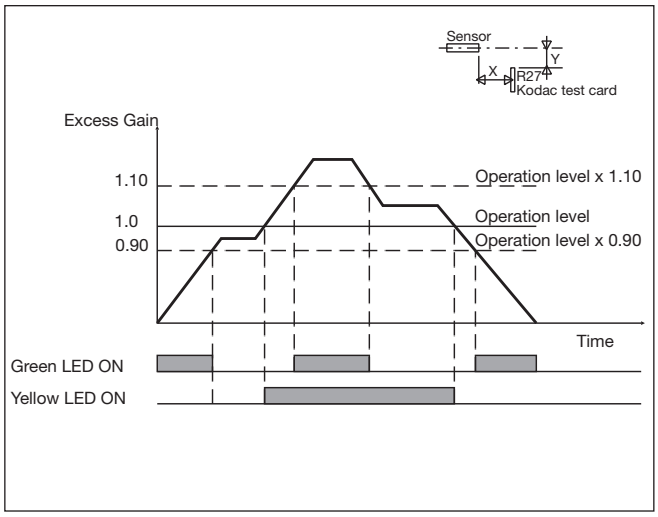


Wiring Diagrams

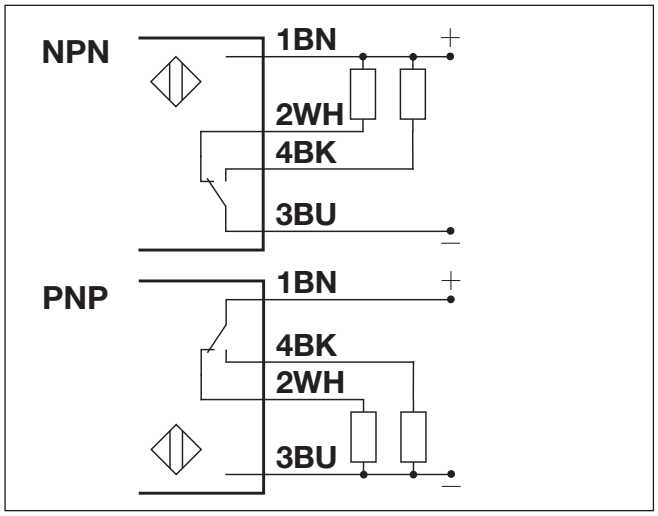


ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru
Sensoren


Detection Diagram

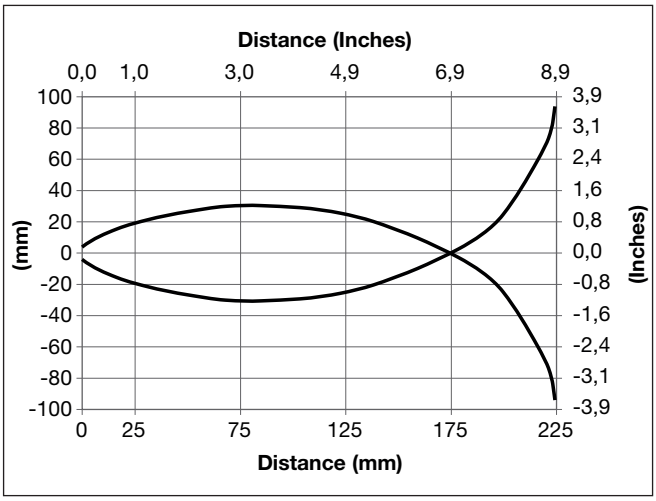


Excess Gain

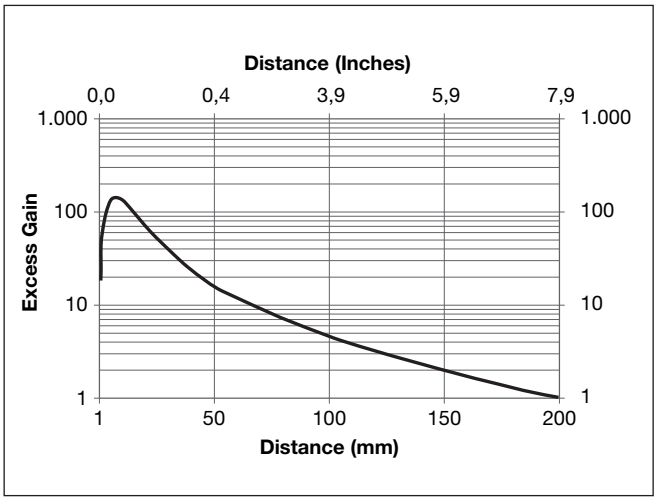

Dimensions

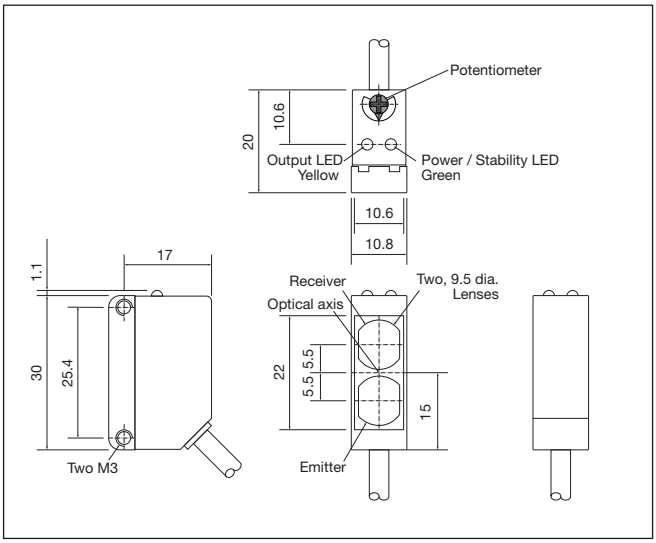

Installation Hints

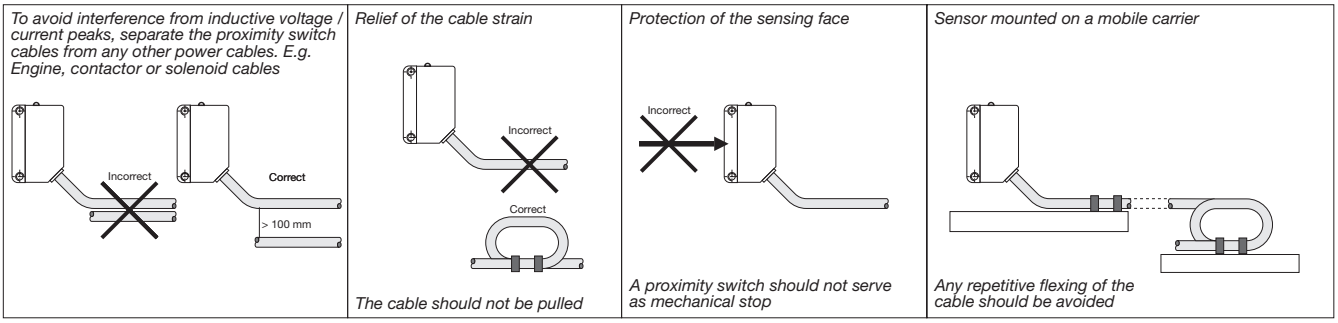

Accessories

- Mounting bracket APD30-MB1 or APD30-MB2 to be purchased separately.

Delivery Contents

- Photoelectric switch: PD30CTD02..WE
- Screwdriver
- **Packaging:** Plastic bag

ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru
Sensoren