P2L151312

ROPE-PULL LEVER LIMIT SWITCH FOR EMERGENCY STOPPING, ISO 13850 COMPLIANT, WITH RESET BUTTON. CONTACTS 2NO+2NC. 120N OPERATING FORCE



Product designation				Rope-pull lever with reset buttom
Product type designation				P2L151312
General characteristics				
Material				
	Housing			Aluminium-zinc alloy
Contact characteristics				
Type of contact				2NO+2NC
Thermal current Ith			A	6
Rated insulation voltage Ui			V	250
Short-circuit protection with fuse			Class/A	10 gG/SC QUICK FUSE
IEC Conventional free air thermal current Ith			A	6
Resistance per pole (average value)			mΩ	<10
Mechanical features				
Operating head fixing				Fixed
Operating torque				
			N	120
			lb	27
Tightening torque (Max)				
	Switch fixing			
			Nm	2.5
			lbin	22.1
	Contact terminals			
			Nm	0.8
			lbin	7
	Body lid screw fixing			
			Nm	0.8
			lbin	7
Conductor section				
	AWG/Kcmil			
		max		14
	IEC			
		min	mm²	1 or 2
		max	mm²	2.5
Cable connection				Self-releasing screw terminal
Cable entry				PG11 with cable gland
Weight			g	459
Operations				
Mechanical life			cycles	100000
Mechanical operation			cycles/h	1800
Ambient conditions				
Temperature				

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

P2L151312


ROPE-PULL LEVER LIMIT SWITCH FOR EMERGENCY STOPPING, ISO 13850 COMPLIANT, WITH RESET BUTTON. CONTACTS 2NO+2NC. 120N OPERATING FORCE

Operating temperature			
	min	°C	-25
	max	°C	+70
Storage temperature			
	min	°C	-40
	max	°C	+70

Resistance & Protection

IP degree		
	Body housing	IP65
Pollution degree		3

Dimensions

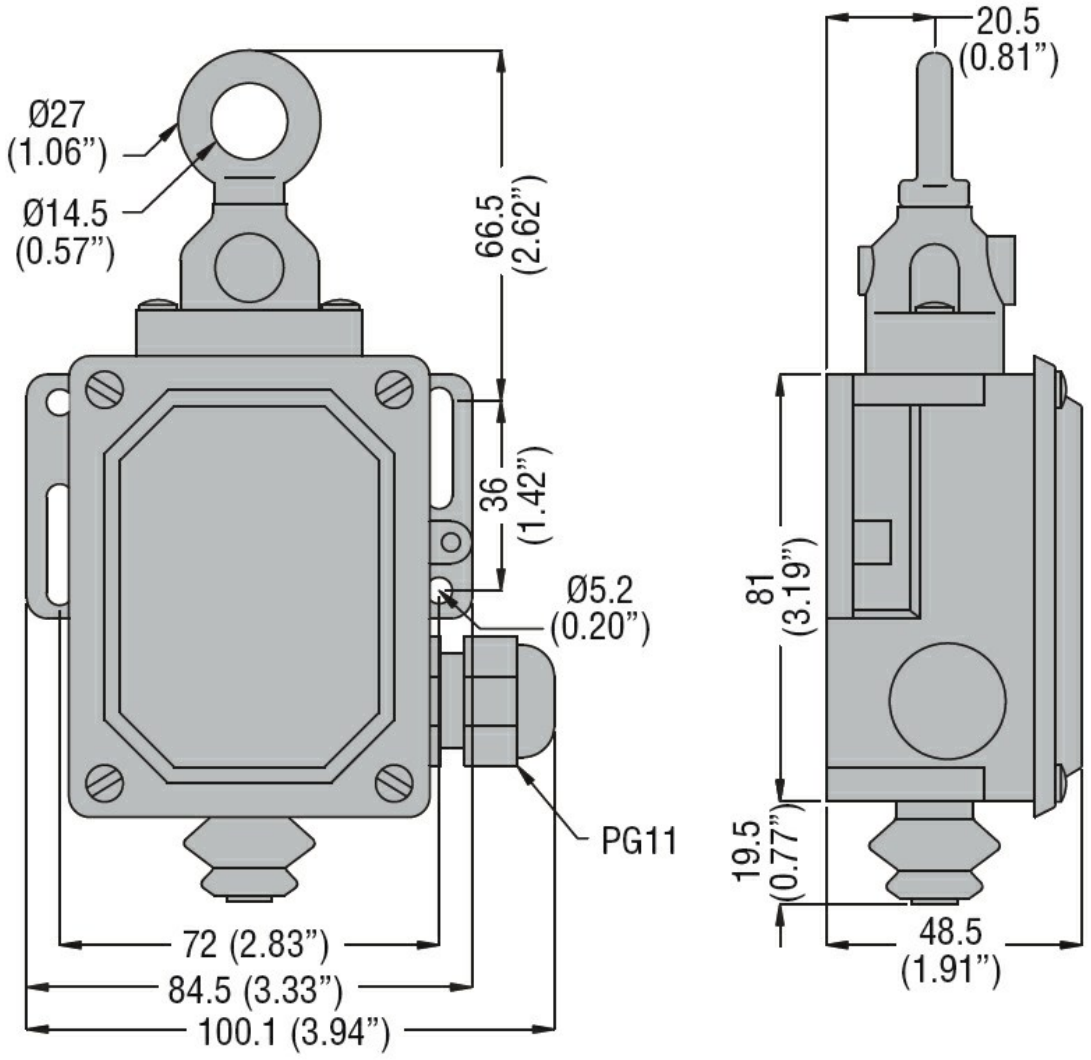


Wiring diagrams

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

P2L151312

ROPE-PULL LEVER LIMIT SWITCH FOR EMERGENCY STOPPING, ISO 13850 COMPLIANT, WITH RESET BUTTON. CONTACTS 2NO+2NC. 120N OPERATING FORCE

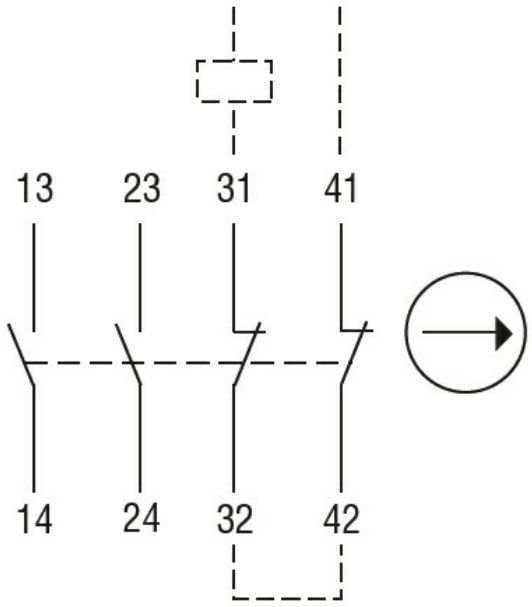

Certifications and compliance

Compliance

/

Certificates

EAC

ETIM classification

ETIM 8.0

EC000030 - End switch

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding