# SGR 14-280-056-A1-D-08-5

## Self-Contained Light Curtains

Light Curtains

**Compatible Transmitter:**

SGT 14-280-056-A1-D-01-5



| Product Data | |
|---|---|
| Function | Receiver |
| Operation Mode | Thru Beam |
| Supply Voltage | 12 - 36 V dc |
| Connection | 5 m cable |
| Sensing Range | 7,5 m |
| Number of Channels | 56 |
| Output | Solid State Relay |
| Output Status | N.O. |
| Response | 49 ms |
| Length | 2800 mm |
| Active Height | 2535 mm |
| Housing | 38,4 x 14 mm |
| Features | Dynamic Sequential Blanking Function |

| Technical Data | |
|---|---|
| Supply Voltage | 12 – 36 V dc |
| Reverse Polarity Protected | Yes |
| Short Circuit Protected | Yes |
| Current Consumption | 50 mA |
| Output Rating | 200 mA |
| Spacing between bottom & Ch1 | 25 mm |
| Channel Spacing | 46 mm |
| Power On Indicator | Green LED |
| Output Indicator | Yellow LED |
| System Status Indicator | Red LED |
| Min. / Max. Sequencial Blanking Speed | 1,6 m/s / 0,05 m/s |
| Profile Dimensions (w x d) | Leading Edge (D), 38,4 x 14 mm |
| Housing Material, Front Lens | Polycarbonate |

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.


| | |
|---|---|
| Housing Material, Profile | Aluminium (black anodised) |
| Cable | 5 x 0,20 mm² |
| Cable Sleeve | PVC Ø 4,9 mm |

| **Environmental Data** | |
|---|---|
| Operation Temperature | –20 to +65 °C |
| Storage Temperature | –40 to +80 °C |
| Sealing Class | IP 67 |
| Light Immunity 5˚ | > 100 000 lux |


**Approvals**

CE UK CA


**Wiring Diagram**

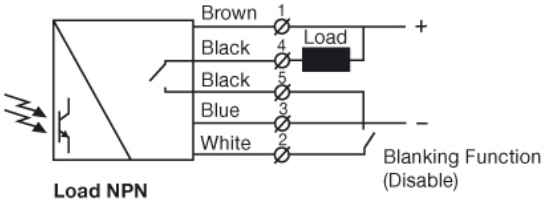


Load NPN

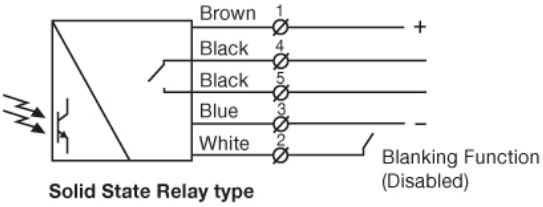



Solid State Relay type

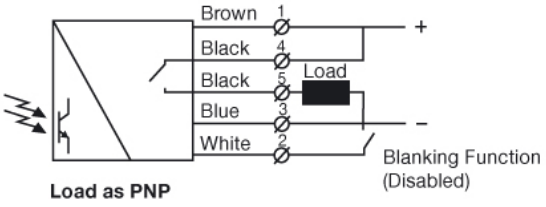


Load as PNP

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.


**Parallel Displacement**

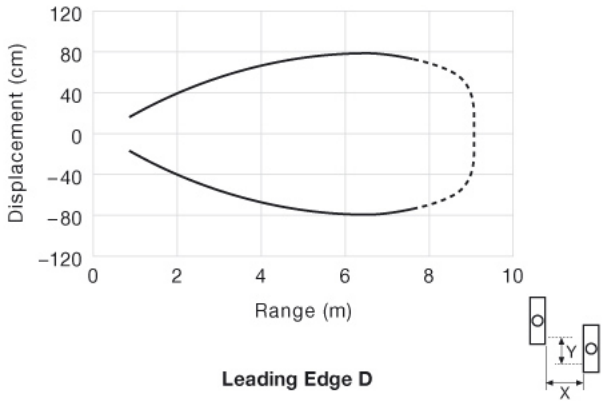


**Leading Edge D**

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.


## Beam Patterns

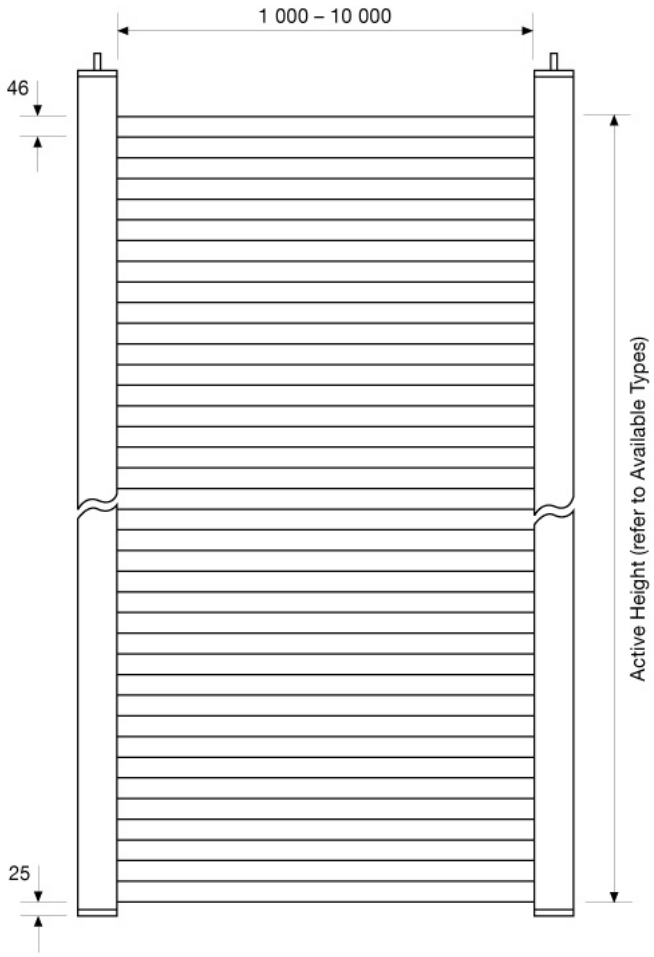


**46 mm channel spacing**

COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

## Dimensions

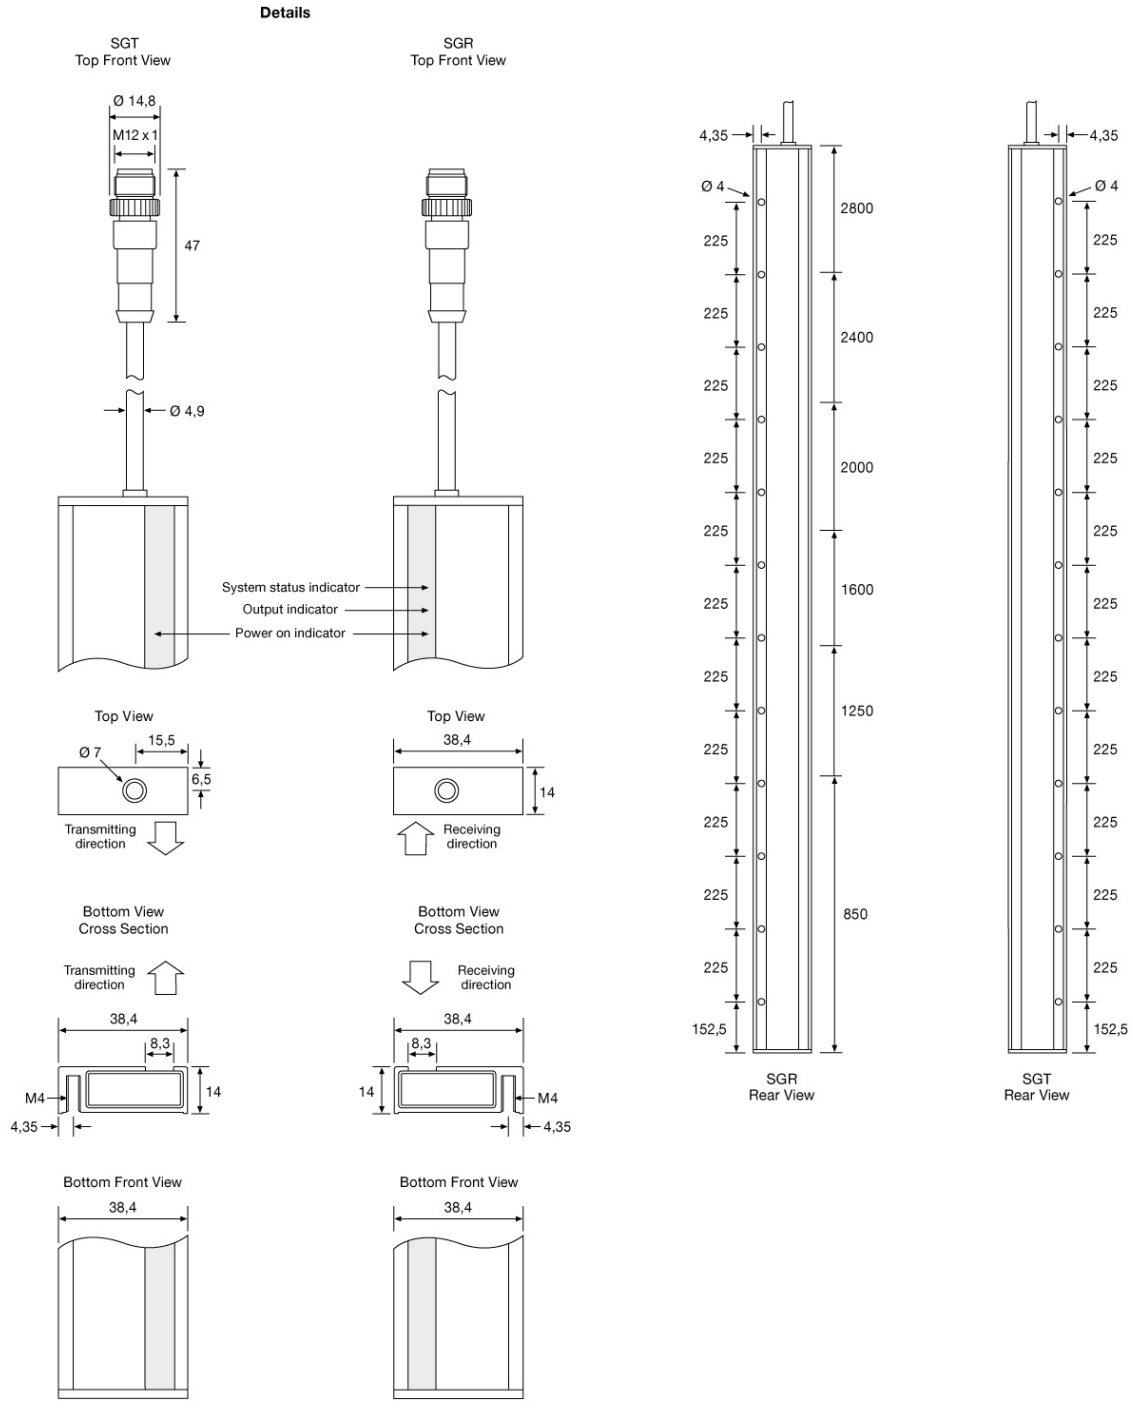



COPYRIGHT © TELCO SENSORS. ALL RIGHTS RESERVED. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.