
Remote I/O module conforming to the PROFINET protocol

8 Digital PNP inputs

8 Digital outputs， 0.5A per output


ELPN-IOM88-0003

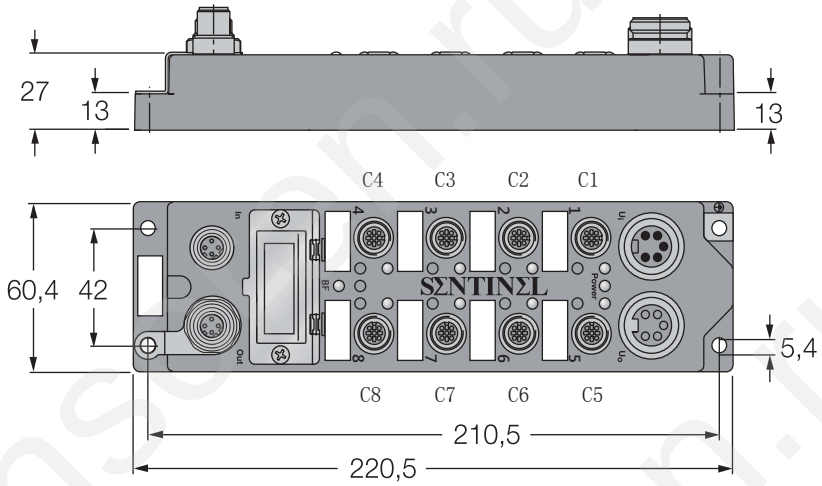


- Profinet remote I/O module
- Integrated Ethernet Switch
- Support 100Base-TX
- 2XM12,4-pin,D-code,Ethernet Fieldbus connection
- glass fiber housing
- Impact and vibration resistance
- Fully potted module electronics
- Copper-plated nickel connector
- Protection classes IP67

Modle	ELPN-IOM88-0003
Supply voltage	24VDC ± 10%
Operating current	< 200mA
Current for powering the load	>8A
Output	
Number of channels	8
Output type	The common terminal is 0V
Output current	0.5A
Output protection	Overload protection, overheating protection
Output protection reaction time	approximately 20ms
switching frequency	100HZ
Output voltage drop	0.6V
electrical Isolation mode	Optocoupler isolation
Input	
Number of channels	16
Input type	PNP
input impedance	3K
Input rated current	7mA
Input delay	3ms
Switch threshold	2mA/4mA
electrical Isolation mode	Optocoupler isolation
communication interface	
Number of communication interface	2
transmission mode	100Base-TX
Automatic consultation mechanism	YES
Automatic cross-flip	YES
Maximum transmission rate	100Mbit/s
Operating temperature	0-55℃


Bus connector M12




Input signal connector M12



Output signal connector M12





Power Supply Connector 7/8”



Sensoren

		Description	
I	module LEDS	LED name	Detailed introduction
		Power	Green LED lights: ON:The module power supply (Ub) is normal OFF:The module power supply is disconnected
		BF	Red LED lights: ON : BUS no connection. Flashing : The connection is normal,but no communication was established with Profinet I/O Connector. OFF : Communication has been established with Profinet I/O Connector.
		X0 to X15 OR Y0 to Y15	yellow LED lights: ON : Input or Output active OFF: Input or Output inactive (X : Input , Y : Output)
II	power suppy	Ui (left) : power suppy input , 7/8'', 5-pin , male Uo (right) : power suppy output , 7/8'', 5-pin , female	
III	Load connec-tion terminals	M12 A-code 5-pin , female C * indicates the * th port, X* represents the * bit in the input port, Y* indicates the * bit in the output port for example: $C1\frac{X0}{X1}$ means the C1 port is input, The fourth hole of the port is input X0, the second hole of the port is input X1. $C8\frac{Y6}{Y7}$ means the C8 port is output, The fourth hole of the port is output Y6, the second hole of the port is output Y7.	
IV	Bus	In (left) : Profinet Bus in , M12 , D-Code , 5-pin , female Out (right) : Profinet Bus out , M12 , D-Code , 5-pin , female	
V	PE	ground connection	
VI	Network status indicator	LINK1	Bus in , Green LED lights: ON : This port establishes a physical connection. OFF: No connection is established on this port
		ACT1	Bus in ,Yellow LED lights: ON : This port has data exchange; OFF: There is no data exchange for this port
		LINK2	Bus out , Green LED lights: ON : This port establishes a physical connection. OFF: No connection is established on this port
		ACT2	Bus out , Yellow LED lights: ON : This port has data exchange; OFF: There is no data exchange for this port

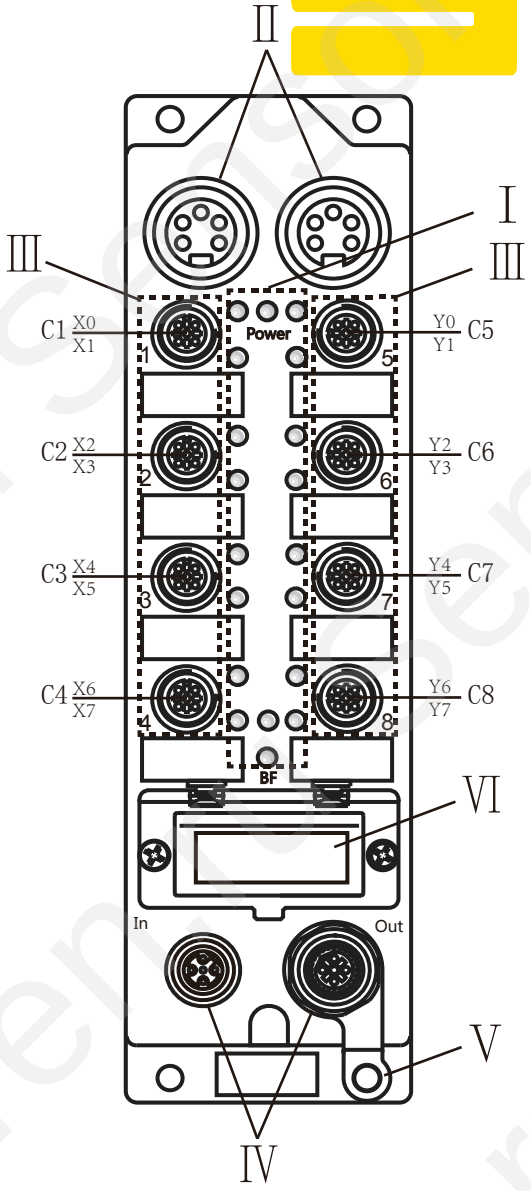

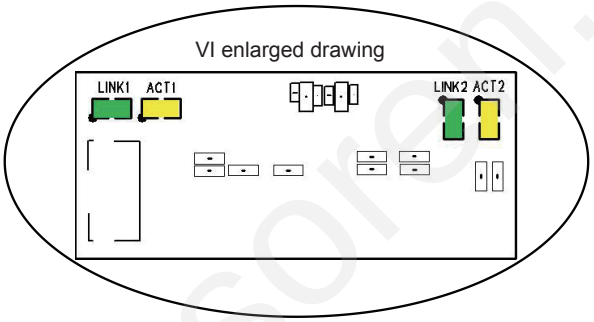

The C * P * represents the *th pin of the C * port; for example: The C2P2 represents pin 2 of the C2 port;
Y * represents the * th output point in the 8-bit data; for example: The Y5 represents the fifth output point.
X * represents the * th input point in the 8-bit data; for example: The X2 represents the sceond input point.

	BYTE	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Intputs	0	X7 C4P2	X6 C4P4	X5 C3P2	X4 C3P4	X3 C2P2	X2 C2P4	X1 C1P2	X0 C1P4
Outputs	0	Y7 C8P2	Y6 C8P4	Y5 C7P2	Y4 C7P4	Y3 C6P2	Y2 C6P4	Y1 C5P2	Y0 C5P4