

# GS-H01

Dedicated Handle

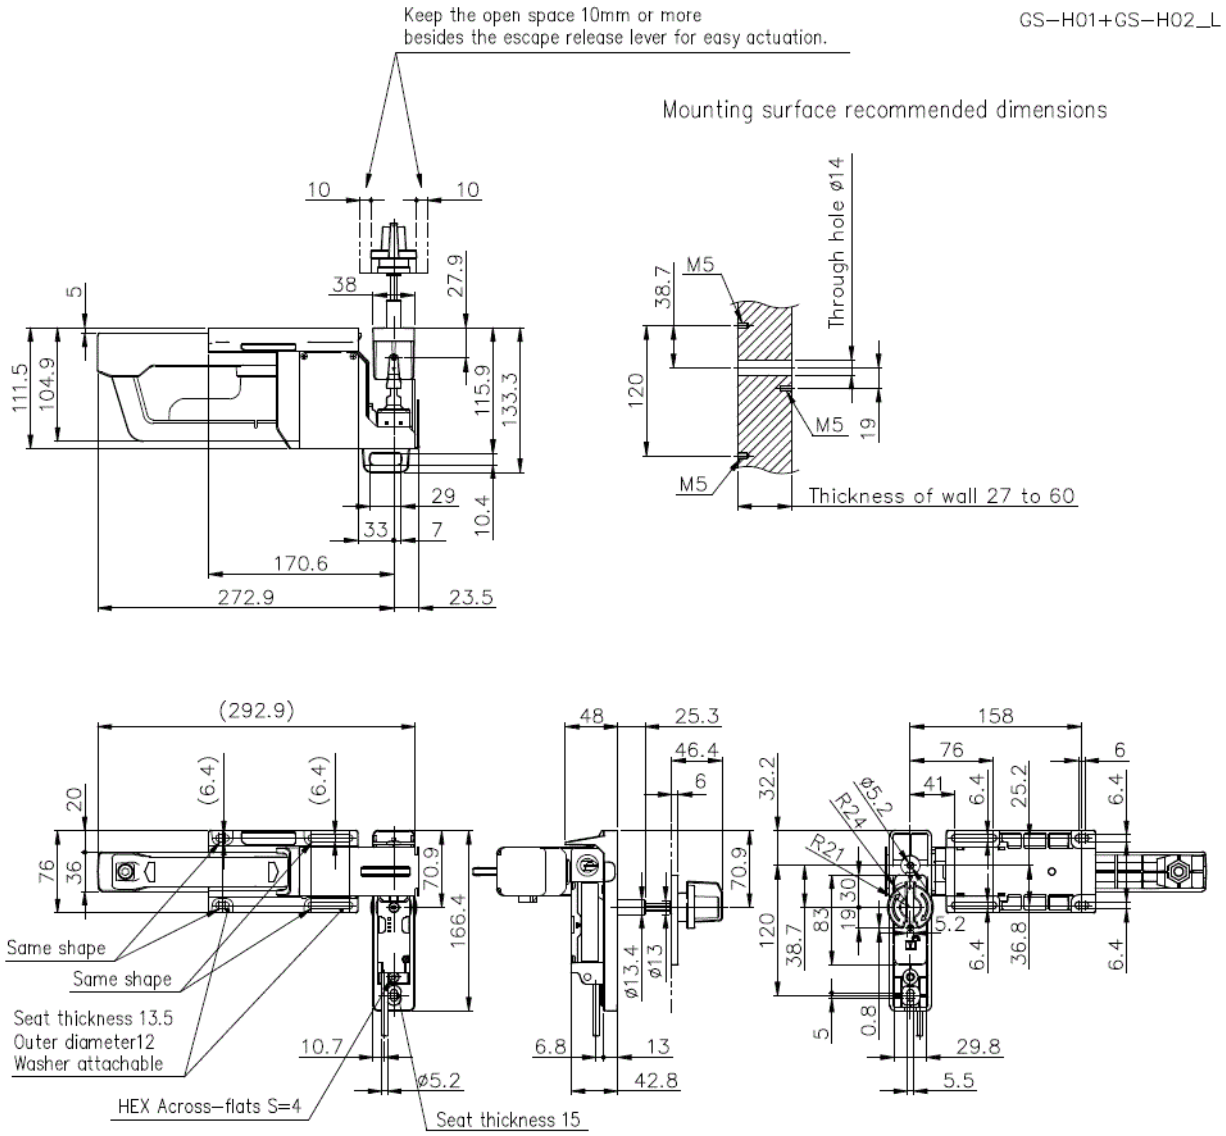
*Please note that accessories depicted in the image are for illustrative purposes only and may not be included with the product.

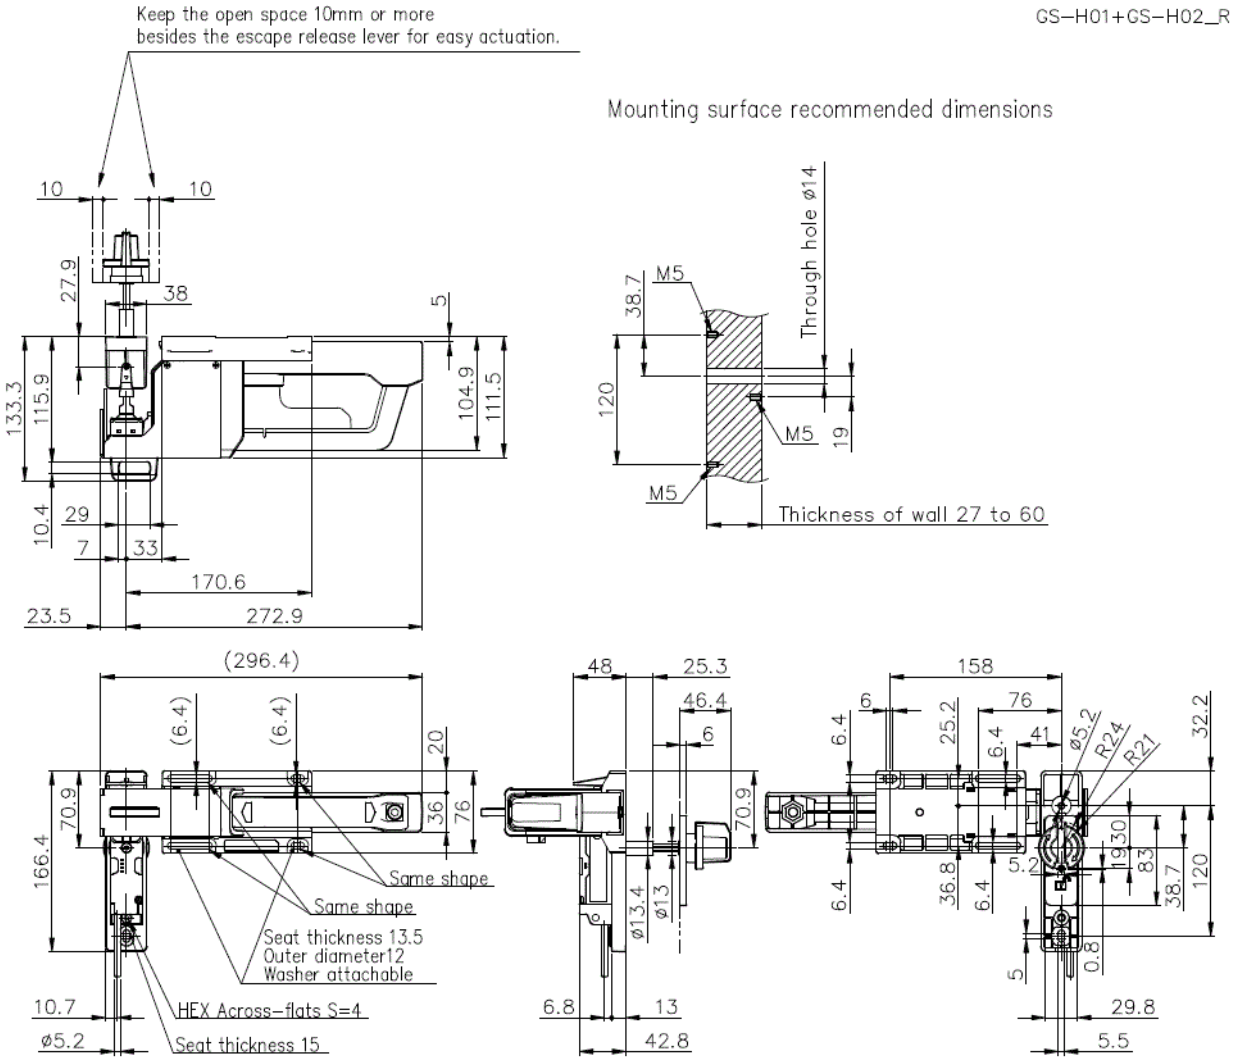
## Specifications

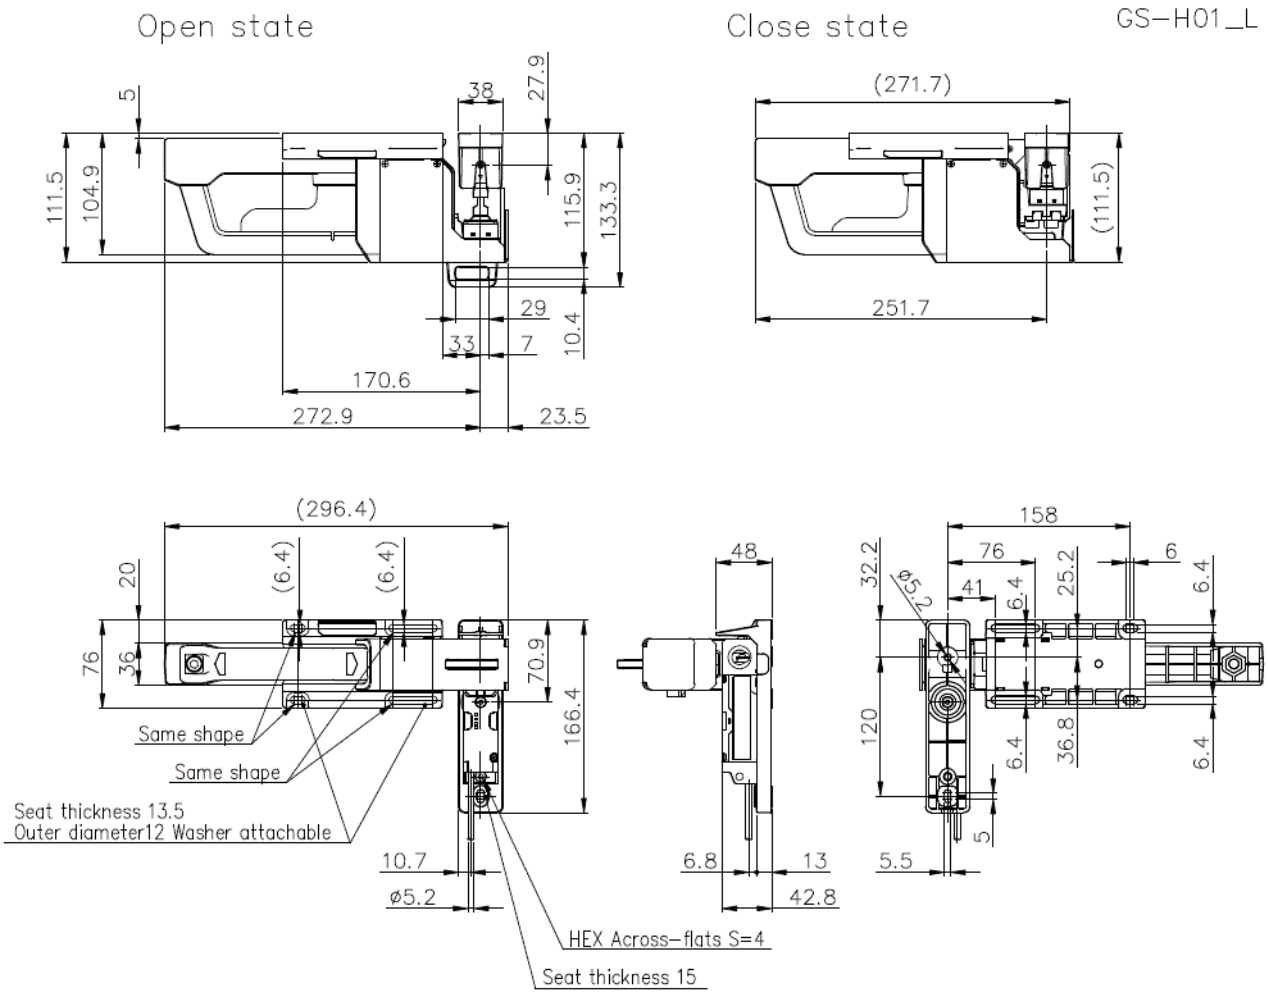
| | |
|---|---|
| Model | GS-H01 |
| Weight | Approx. 1070 g |

# Dimensions

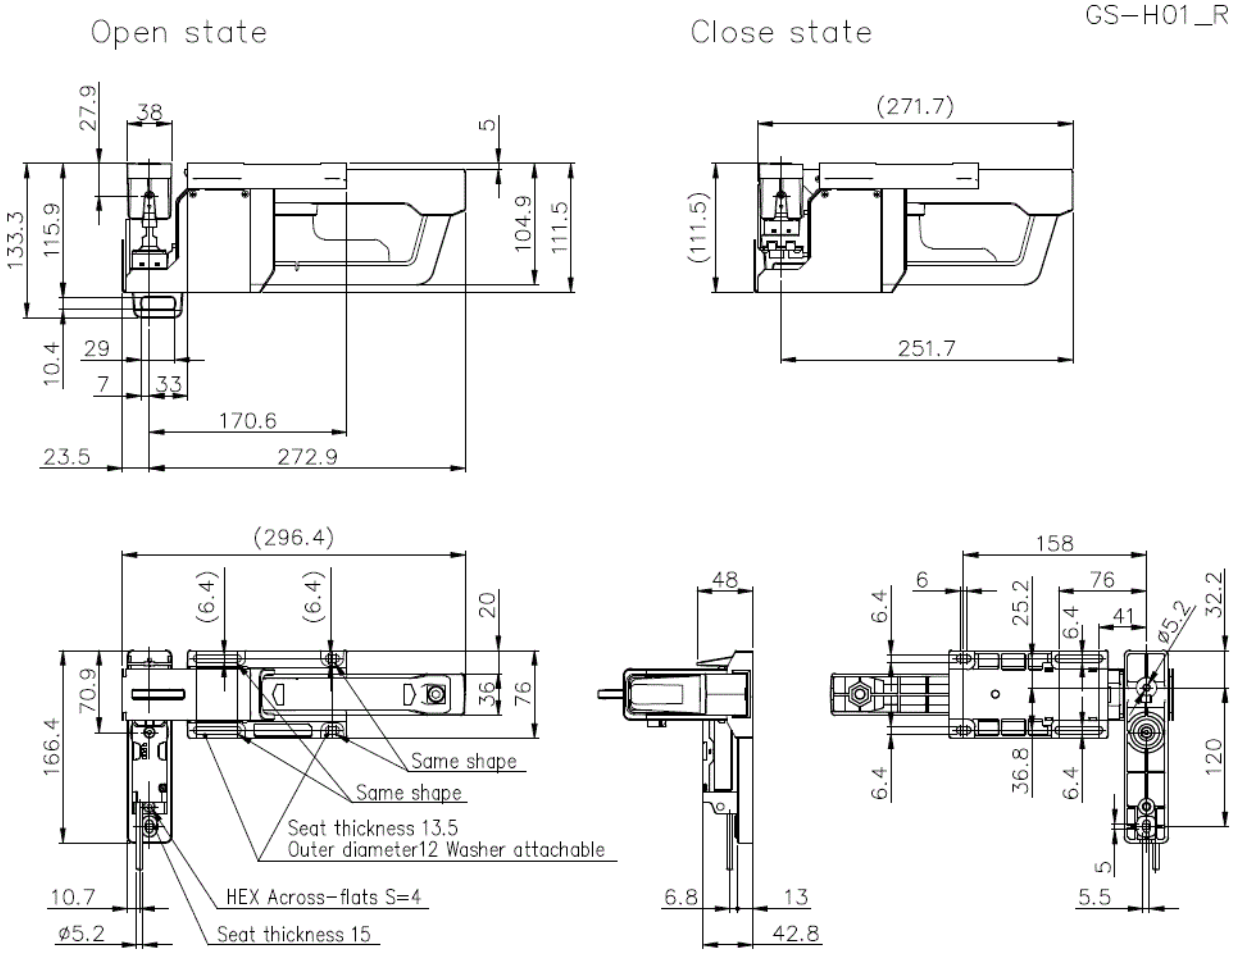
* Download CAD file or product manual for larger image/text and more detail.




Keep the open space 10mm or more
besides the escape release lever for easy actuation.
GS-H01+GS-H02_R
Mounting surface recommended dimensions
Through hole ø14
M5
38.7
120
19
Thickness of wall 27 to 60
10
27.9
38
5
133.3
115.9
104.9
111.5
10.4
29
7
33
170.6
23.5
272.9
(296.4)
(6.4)
20
70.9
166.4
36
76
Same shape
Seat thickness 13.5
Outer diameter12
Washer attachable
HEX Across-flats S=4
ø5.2
Seat thickness 15
48
25.3
46.4
6
ø13.4
ø13
6.8
13
42.8
158
76
41
25.2
ø5.2
R24
R21
32.2
19
30
83
38.7
120
36.8
5.2
0.8
29.8
5.5


Open state
Close state
GS-H01_L
5
38
27.9
111.5
104.9
115.9
133.3
29
33
7
10.4
170.6
272.9
23.5
(271.7)
(111.5)
251.7
(296.4)
20
(6.4)
(6.4)
76
36
70.9
166.4
Same shape
Same shape
Seat thickness 13.5
Outer diameter12 Washer attachable
10.7
ø5.2
48
6.8
13
42.8
HEX Across-flats S=4
Seat thickness 15
158
76
6
32.2
ø5.2
41
6.4
25.2
6.4
120
6.4
36.8
6.4
5
5.5

GS-H01_R


Open state
Close state
27.9
38
5
133.3
115.9
104.9
111.5
10.4
29
7
33
170.6
23.5
272.9
(271.7)
(111.5)
251.7
(296.4)
(6.4)
(6.4)
20
70.9
36
76
166.4
Same shape
Same shape
Seat thickness 13.5
Outer diameter12 Washer attachable
10.7
HEX Across-flats S=4
ø5.2
Seat thickness 15
48
6.8
13
42.8
158
6
76
6.4
25.2
6.4
41
ø5.2
32.2
6.4
36.8
6.4
120
5
5.5