
# Conductive Sensors
# Hanging Probes
# Types VH1, VH2, A94-10

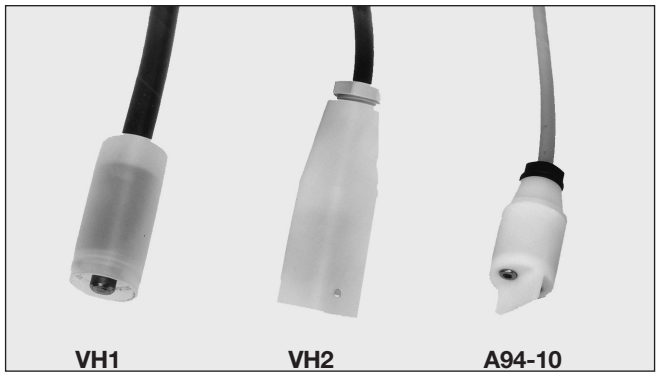


- **VH1 and VH2: Hanging electrodes with Neoprene cable**
- **A94-10: Hanging probe for (swimming) pool level control**

## Product Description

The sensors VH1 and VH2 are hanging electrodes with Neoprene cables. The sensor A94-10 is a hanging probe for (swimming) pool level control. For use with amplifier (please refer to separate data sheets).

## Ordering Key

**VH 1**

**Type**


## Type Selection

| Electrode isolation | Ordering no. 1 electrode | Ordering no. 2 electrodes |
|---|---|---|
| No | **VH 1** | **A 94-10** |
| Yes | **VH 2** | |


## Specifications

| | |
|---|---|
| **Electrodes** | |
| Isolation | |
| VH2 | Nylon 6 |
| Material | Stainless steel AISI316/DIN1.4401 |
| **Housing** | |
| Material | |
| VH1, VH2 | Nylon 6 |
| A94-10 | Polyester |
| Dimensions | |
| VH1 | Ø 18 x 36,5 mm |
| VH2 | Ø 32 x 75,5 mm |
| A94-10 | Ø 22 x 75,0 mm |
| Connection | |
| VH1, VH2 | Cable (Neoprene), 5 m, 1 x 2.5 $mm^2$ |
| A94-10 | Cable (PVC), 5 m, 2 x 0.5 $mm^2$ |
| **Environment** | |
| Degree of protection | IP 67 |
| Operating temperature | |
| VH1, VH2 | 0 to +90°C (+32° to +194°F) |
| A94-10 | 0 to +60°C (+32° to +140°F) |
| Storage temperature | -25° to +100°C (-13° to +212°F) |
| **CE marking** | IEC 529 |


## Dimensions

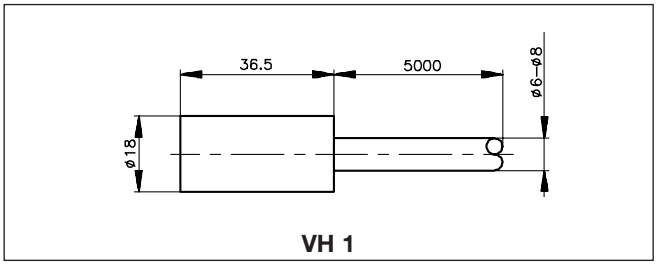


**VH 1**

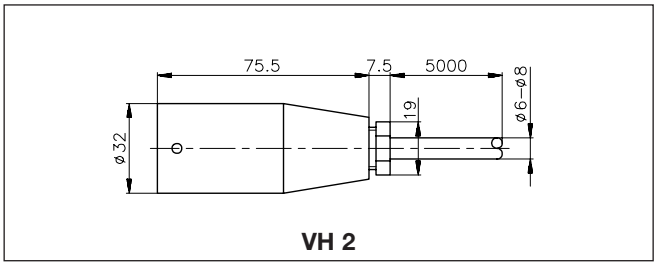


**VH 2**

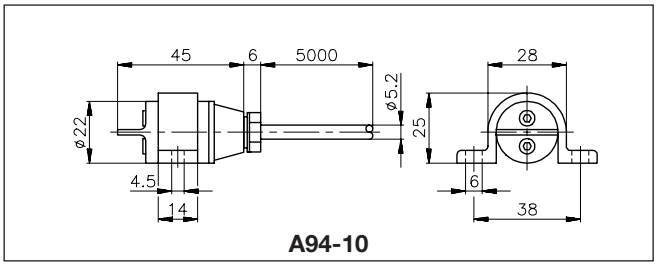


**A94-10**



ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru
Sensoren