
Conductive Sensors
Hanging Probes
Types VH1, VH2, A94-10

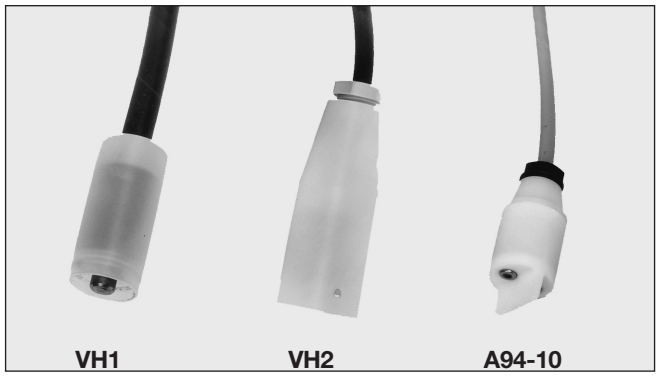

- **VH1 and VH2: Hanging electrodes with Neoprene cable**
- **A94-10: Hanging probe for (swimming) pool level control**

Product Description

The sensors VH1 and VH2 are hanging electrodes with Neoprene cables. The sensor A94-10 is a hanging probe for (swimming) pool level control. For use with amplifier (please refer to separate data sheets).

Ordering Key

VH 1

Type


Type Selection

Electrode isolation	Ordering no. 1 electrode	Ordering no. 2 electrodes
No	**VH 1**	**A 94-10**
Yes	**VH 2**	


Specifications

Electrodes	
Isolation	
VH2	Nylon 6
Material	Stainless steel AISI316/DIN1.4401
Housing	
Material	
VH1, VH2	Nylon 6
A94-10	Polyester
Dimensions	
VH1	Ø 18 x 36,5 mm
VH2	Ø 32 x 75,5 mm
A94-10	Ø 22 x 75,0 mm
Connection	
VH1, VH2	Cable (Neoprene), 5 m, 1 x 2.5 mm^2
A94-10	Cable (PVC), 5 m, 2 x 0.5 mm^2
Environment	
Degree of protection	IP 67
Operating temperature	
VH1, VH2	0 to +90°C (+32° to +194°F)
A94-10	0 to +60°C (+32° to +140°F)
Storage temperature	-25° to +100°C (-13° to +212°F)
CE marking	IEC 529


Dimensions

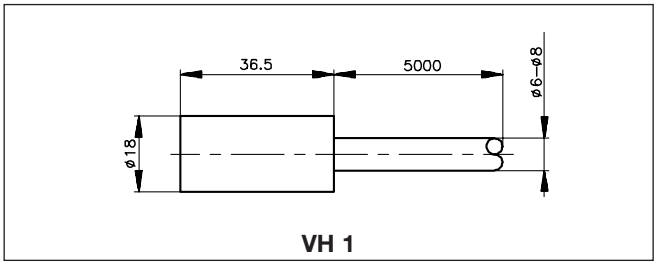

VH 1

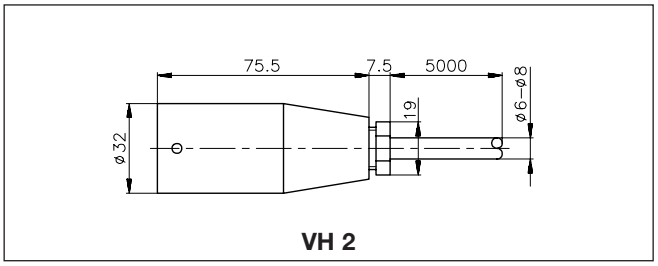

VH 2

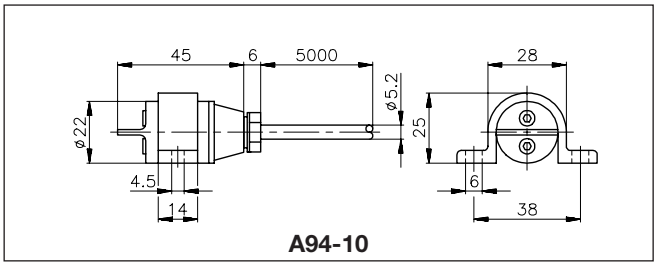

A94-10

ООО «Сенсорен Электро» +7(495)150-48-00 info@sensoren.ru
Sensoren